

ARX hardware has the advanced characteristics that meet your construction goals and perform best in all environments.

CONCEALED HINGE SIDE - WINDOW HARDWARE THAT SATISFIES EVERY DEMAND

ARX Inside major benefits:



1. Easy adjustment for different window dimensions, shapes, and constructions.
2. Easy to assemble and use.
3. All parts of ARX Inside hinge side are mounted without any jigs.
4. The solutions in ARX Inside mechanisms are protected by 2 patents.®

For more information
please visit ARX web site:



ARX Inside Patented solutions

No wobbling of the sash in the upper hinge, when the sash is open.

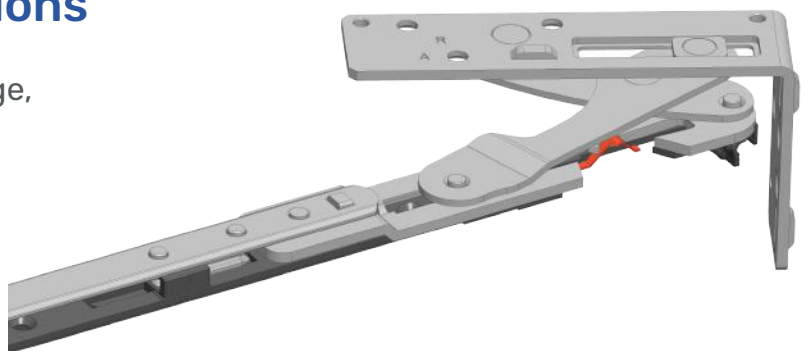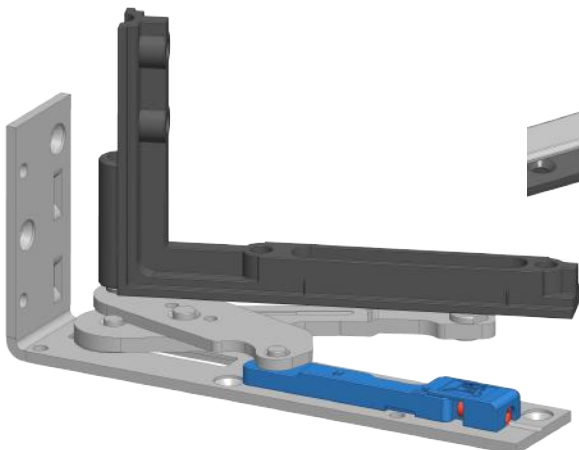

This solution is more rigid than usual solutions and it offers better access to the adjustment screw for sash adjustment.

PATENTED SOLUTION

The sash stays fixed because of clever innovative spring mechanism.

ARX Inside GUIDELINES

SYSTEMS

PVC 12/20-13 and PVC 12/22-13

PROFILES (all mayor PVC profile manufacturers)

ALUPLAST, GEALAN, PROFINE GROUP, REHAU, SCHUCO, VEKA, Etc.

RANGE OF USE

T&T WINDOWS

- SASH REBATE WIDTH: 380 - 1400 mm,
- SASH REBATE HEIGHT: 320 - 2400 mm,

ADDITIONAL PROPERTIES

- Max. opening angle: 110°,
- Max. load per sash: 80 kg,
- Corrosion resistance: Grade 5 (480h salt spray),
- No jigs required for installation.

ARX Inside INNOVATION

- Clever innovative mechanism on top hinge, which provides a no sash wobble solution in open position,
- L/R sash adjustment on lower hinge is located on corner pivot, providing easy access for adjustment.



The quality of ARX SPIN hardware is confirmed by the **LIFETIME WARRANTY** for functionality and a **10-YEAR** warranty **ARX COAT** anti-corrosion protection, which achieves **GRADE 5** of surface protection.

