



Made in Europe



10-YEAR
WARRANTY

Made in Europe



ARX COAT
SURFACE
PROTECTION

ARX SLIDE

High quality, durable and simple
Sliding hardware for sliding doors and windows



Made in Europe
ARX
by KOVINOPLASTIKA LOŽ
10-YEAR WARRANTY

Made in Europe
ARX
by KOVINOPLASTIKA LOŽ
ARX COAT SURFACE PROTECTION

Bring premium quality
into your home for a lifetime.

ARX PORTFOLIO

ARX SPIN



Turn and tilt hardware solutions
for windows and balcony doors.

ARX
SPIN

ARX DOOR LOCK




Multipoint door lock solutions for
main and back entrance doors.

ARX
DOOR LOCK



IFT Rosenheim -
Certificate of conformity
for ARX SPIN and ARX
DOOR LOCK.

ARX CASEMENT



Solutions for
casement windows
-outward opening.

ARX
CASEMENT

ARX SLIDE



Sliding hardware
solutions for doors
and windows.

ARX
SLIDE

ARX ACCESSORIES



High quality, durable
and simple accessories
for windows and doors.

ARX
ACCESSORIES

Follow us:



www.arx-hardware.com



ARX – bring premium quality in your home for a lifetime

ARX is one of the leading providers of window and door hardware In Europe. Brand ARX is built on more than 70 years of foundation and experience of KOVINOPLASTIKA LOŽ. From that knowledge we are drawing the inspiration to create new and innovative solutions. Integrity in everything we do, quality of our work, and tailor-made building hardware solutions for our customers are the secret of our success and harmonious partnership with our customers..

Window and door hardware tailored to your demands

Concerning costumers our goal is to provide functional, reliable & innovative experience of uncompromising quality that meets the highest standards of window and door hardware. We are focused on developing and applying best solutions in the field, while guaranteeing a flexible and efficient production process. Such approaches, in combination with the established knowledge, enable our experts to design and execute the most appropriate solutions tailored to your demands.

Our values, vision and mission

We are a team of engaged co-workers with the highest values like honesty, excellence, openness, endeavor and responsibility. We always strive to optimally use the knowledge and technologies, by which we develop and create the products and assemblies with higher added value, to ensure end users with a high level of security, wellbeing and best user experience. Our efforts have been rewarded by becoming established well-known development supplier. Being the best flexible and digitized niche solution developer and material modifier is our first and foremost mission.

CONTENTS

ABOUT	1
WHY ARX.....	6
BETTER THAN THE REST.....	7
STANDARDS AND CERTIFICATES.....	9
PRODUCT WARRANTY AND LIABILITY.....	10
IN-LINE	13
HIGH-QUALITY, DURABLE, SIMPLE.....	14
SYMBOLS LEGEND	15
SASH ARRANGEMENT	16
DIRECTION OF OPENING	16
PROFILE RECOMMENDATION	17
IN-LINE BASIC SCHEME.....	18
SINGLE ACTION IN-LINE ESPAGNOLETTE	20
CAM 8 mm BS 7 mm.....	20
CAM 8 mm BS 17 mm.....	21
HOOK 5 mm BS 17 mm.....	22
STRIKERS	23
ROLLERS.....	24
HANDLES	25
BUFFER STOP	25
SASH PROFILE TREATMENT	26
INDIVIDUAL STRIKER POSITIONING.....	27
LOCKING CAM ADJUSTMENT INSTRUCTIONS.....	28
MAINTENANCE INSTRUCTIONS	29
HKS & SP	31
HIGH-QUALITY, DURABLE, SIMPLE.....	32
SYMBOLS LEGEND	34
SASH ARRANGEMENT	35
DIRECTION OF OPENING	35
COMPARISON OF HKS & SP SYSTEM OPENING	36
PROFILE RECOMMENDATION	37
APPLICATION DIAGRAMS	38
Tilt & Slide - HKS	38
Tilt & Slide - HKS 160 kg.....	38
Tilt & Slide - HKS 100 kg.....	38
Retract & Slide - SP	39
Retract & slide - SP 200 kg.....	39
Retract & slide - SP 160 kg	39
TILT & SLIDE - HKS 100 / 160 BASIC SCHEME	40
RETRACT & SLIDE - SP 160 / 200 BASIC SCHEME.....	42

CONTENTS

T&T ESPAGNOLETTE M44
Centered / variable handle height.....	.44
T&T ESPAGNOLETTE M - larger backsets.....	.45
Centered / variable handle height.....	.45
T&T ESPAGNOLETTE M - larger backsets + lockable.....	.46
Centered / variable handle height.....	.46
T&T ESPAGNOLETTE KV.....	.47
Fixed handle height.....	.47
CORNER DRIVE48
ESPAGNOLETTE EXTENSION48
CENTER LOCK49
Vertical.....	.49
Horizontal49
STRIKER50
T&Ti STRIKER51
SECURITY STRIKER.....	.52
SP STRIKER - NIGHT VENT53
SET OF RAILS.....	.54
Tilt & Slide - HKS54
Retract & Slide - SP55
STAY SYSTEM.....	.56
Tilt & Slide - HKS56
Retract & Slide - SP57
SET OF BOGIES58
Tilt & Slide - HKS58
Retract & Slide - SP58
HKS 160 SET.....	.59
COVER CAPS HKS 10059
HANDLES60
Window handles.....	.60
Slide handles61
LOCKING CAM ADJUSTMENT INSTRUCTIONS.....	.62
Rolling cam - R.....	.62
Rolling security cam - RS63
STRIKER JIGS INSTALLATION INSTRUCTIONS.....	.64
Types64
Instructions for use.....	.65
TOP & BOTTOM RAIL JIG - HKS & SP.....	.65
SASH PROFILE TREATMENT66
Window-handle drilling66
Gear-case routing66
Lock-case drilling67

CONTENTS

SASH HARDWARE INSTALLATION INSTRUCTIONS	68
Tilt & Slide - HKS	68
Retract & Slide - SP	69
FRAME HARDWARE INSTALLATION INSTRUCTIONS	70
Mounting of bogies	70
Parallel alignment of bogies	71
Mounting of guide & bottom track and stay system	72
Hanging sash	73
Installation of guide block and sash alignment	74
Sash alignment	75
Buffer installation	76
Bogie safety cover and support arm cover installation	77
MAINTENANCE INSTRUCTIONS	78
PRACTICAL AGILE SLIDING SYSTEM	79
HIGH-QUALITY, DURABLE, SIMPLE	80
SYMBOLS LEGEND	81
SASH ARRANGEMENT	82
DIRECTION OF OPENING	82
PASS SYSTEM OPENING	83
APPLICATION DIAGRAM	84
PROFILE RECOMMENDATION	85
RETRACT & SLIDE - PASS 150 BASIC SCHEME	86
PRODUCT PORTFOLIO	88
Espagnolettes and extensions	88
Basic set	89
PROFILE TREATMENT	90
Espagnolette	90
Vertical back strikers	91
Corner guide strikers	92
Bogies	92
Middle horizontal strikers	93
STRIKER POSITIONS	94
ADJUSTMENT INSTRUCTIONS	95
MAINTENANCE INSTRUCTIONS	96
NOTES	97

NOTES .



Quality-to-price ratio that ensures for the best market performance

Besides its distinctive quality, the ARX building hardware has an excellent quality-to-price ratio, providing you with a fast and effective strategy of winning market positions both in the Europe and globally. We provide the best quality, value, and service to meet our business partners' and users' needs, never leaving them in the lurch.

Accelerating the pace of innovation

Through the years we were never the silent observers of migration from old window and door hardware solutions to the nowadays highly technological ones, tailored for smart homes and buildings. Experiences, engineering knowledge and valuable partnerships helped us respond to and anticipate market needs, adapt our methods or materials, and innovate. Development of high-quality new products that have left a mark on the industry and decades of experience have shaped our unique path.



There is hardware,
and then there is **ARX**.

FOR FULL TERMS
AND CONDITIONS,
PLEASE VISIT:





Based on the huge versatility of our knowledge implemented into the design and applied research, we do not simply offer you products; we provide you with the following BENEFITS:



ARX 10-year warranty

For you to have complete confidence in our products, proven technologies, and expert skills, like we do, we provide you with a 10-year warranty on our building hardware functionality. The warranty applies exclusively to the use of the ARX building hardware, and to all manufacturers and suppliers of doors and windows who use ARX building hardware.



ARX surface protection and resistance coating ARX

Surface protection and resistance coating ARX Coat, provided by Kovino-plastika Lož is one of the best on the market.

Testing of corrosion resistant coating is carried out in our salt chamber according to standard ISO 9227 (NSS). It is done periodically, so we control the whole process. In case of deviations from perfect surface protection, immediate actions are applied to the manufacturing process to produce only the best products.

ARX building hardware suits the highest requirements of corrosion resistance as it reaches the 5th grade according to the standard EN 1670. That is an equivalent of 480 hours of salt spray.

ARX Coat is a proper surface protection, which provides good anti-corrosion durability and a trendy silver appearance, all due to our ARX internal processes.



Versatile hardware

ARX's technology enables effortless operation of window sashes and doors. The system can be fitted to a wide range of sizes and allows for simple integration of components during fabrication process.

The ARX building hardware is fully reliable and adjusted to hard climate; it combines the following features:

- High-quality material,
- High quality production and installation of individual hardware sets by using highly automated production,
- Hardware is easy to maintain, providing a simple and environmentally friendly degradation,
- A wide range of use,
- Long-term operation and simple installation,
- Provides a highly automated hardware installation to the sash and window frame,
- Proper surface protection ARX Coat.

With a thoroughly made-out design, the ARX building hardware will add a new value to your windows and doors.

STANDARDS AND CERTIFICATES



Manufacturer's standards and certificates

Our certificates present our dedication to the verifiable quality standards for processes and products. We are proud that we have repeatedly earned them. In every certificate, we see undisputed proof of long-term commitment to our partners, employees, and leadership.

MANAGEMENT SYSTEM CERTIFICATES:

- ISO 9001
- ISO 14001

CERTIFICATE OF COMFORMITY:

- IFT (QM 328)
- IFT (QM 342)

Kovinoplastika Lož aquired many important standards and certificates. Among them is EN1670 (grade 5) which has been held without interuption.



PRODUCT WARRANTY AND LIABILITY

1. Introduction

According to the instructions of the Quality Association for Locks and Hardware (Gütegemeinschaft Schlösser und Beschläge), the VHBH Directive, issued on 11.12.2009 and the manufacturer's responsibility for its products, defined in the Consumer Protection Act (Consumer Protection Act of the Republic of Slovenia, paragraph 2, §4-11a), the following information about the slide hardware must be observed. Failure to comply with the following information exempts the manufacturer from liability.

2. Product information and stipulated application

2.1 Quality Assurance Association for Locks and Hardware

(Gütegemeinschaft Schlösser und Beschläge) published in the VHBH Directive states that sliding hardware is hardware for sliding sashes, which are used principally used as barriers to the outside.

This hardware is used for:

- bringing sashes into sliding mode, by activation of a handle, into a slide position (IL system),
- bringing sashes into sliding mode, by activation of a handle, into a slide position and bringing sashes into ventilation mode, by activation of a handle, into a vent position (PASS system),
- bringing sashes into ventilation mode, by activation of a handle, into a vent position (SP system),
- bringing sashes into tilt mode, by activation of a handle, into a tilt position (HKS system),
- bringing sashes into sliding mode, by activation of a handle, into a slide position (SP and HKS systems).

Sliding hardware is used for installation in sliding windows and doors which are to be vertically installed.

According to the definition above, the regular function of the sliding hardware is closing the sliding windows and doors and opening them in different airing positions. When the sash is closed, the resistance of a gasket normally needs to be overcome.

2.2 Misuse – exclusion of liability

Misuse is not compliant with the basic purpose of hardware. Anti-theft sliding windows and balcony doors for wet spaces and installation in aggressive and corrosive climate require special hardware with particularly defined characteristics, adjusted to individual building case.

2.3 Restrictions on the use

Open sliding windows and doors only have protective function and do not provide fissure sealing, safety in heavy rain or snow, sound and thermal insulation and anti-theft protection. In windy weather and in case of draught, sliding windows or doors must be closed and bolted. Windy weather and draught logically mean that a sliding window or door open and close automatically and uncontrollably in one of the open positions due to air pressure or whirlwind. The only way to make

a sliding window or door fixedly open, is to install additional hardware elements.

2.4 Use in case of special requirements

Wind resistance of the closed and bolted sliding window or door depends on the actual structure of the sliding window or doors. In case a sliding window or door has to endure wind load, according to the DIN EN 12210 standards (in particular pressure test p3), suitable hardware compilations are to be matched in relation to the respective window design and frame material, and each case individually agreed upon.

Anti-theft sliding windows and doors for wet spaces and installation in aggressive and corrosive climate require special hardware with particularly defined characteristics, adjusted to individual building case.

In general, sliding hardware meets the requirements according to the DIN 18025 standards, applicable to open-type buildings. To this end, particular agreements and adjustments regarding the appropriate hardware structure and its installation on windows and doors are required.

3. Misuse of the product

Misuse of the sliding hardware for sliding window and door (i.e. the use, non-compliant with intended use of the product) includes the following:

- inserting obstacles in the opening vicinity between the frame and sash and thus preventing the proper specified use,
- if, contrary to the instructions of use, the sash is uncontrollably pushed toward the window reveals (e.g. because of the wind), causing damage or destruction of hardware, sash material or other parts of the window and the sash,
- additional load on the sliding window's or door's sashes (if, for example, children swing on the windows or door sashes),
- inserting a hand or an object into the rebate between the window and the sash when closing the sliding window or doors (risk of injury).

4. Product warranty

The manufacturer of ARX building hardware provides a 10-year warranty on functionality and surface protection, starting from the date of delivery of goods that is defined or can be defined and applies to the territory of the EU.

The warranty applies exclusively to the use of ARX building hardware components. The warranty applies to all manufacturers and suppliers of sliding windows and doors who use ARX building hardware, starting from the purchasing date that is written on the invoice.

For more information please check warranty conditions on webpage - www.arx-hardware.com.

PRODUCT WARRANTY AND LIABILITY

5. Product characteristics – manufacturer's instructions for use

5.1 Maximum sash weights

The maximum sash weight for individual hardware installation must not be exceeded. The construction element with the smallest possible permissible load defines the maximum weight of the sash. Application diagrams and component classification must be considered.

5.2 Sash sizes

Application diagrams show the relationship between the permissible sash rebate heights, depending on various glass weights i.e. total glass weight. The calculated sash dimensions in the rebate or the sash formats (portrait and/or landscape format), as well as the maximum sash weight must not be exceeded under any circumstances.

5.3 Hardware combination

The manufacturer's regulations, regarding the combination of hardware (i.e. the application of additional stay arms, the hardware design for anti-theft sliding windows and door sashes), must be followed.

5.4 Hardware functionality

Permanent hardware functionality can be ensured by consistently following the rules below:

- Professional installation of hardware components must be performed according to the attached instructions for installation,
- hardware assembly in the process of sliding window or door installation is to be done professionally,
- the sliding window or door manufacturer must deliver the instructions for use and maintenance to the user, along with the guidelines regarding product warranty.

6. Product maintenance

Hardware components, important for safety, must be checked at least once a year for fitting tightness and tight fitting. If necessary, the fixing screws can be additionally fastened and the component parts replaced. The following maintenance work must be performed at least once a year:

- Greasing and functional control of all the movable parts and all the locking points of the sliding hardware.
- only the cleaning and maintenance agents, which do not reduce the anti-corrosion hardware protection, may be used.

Hardware installation or mounting must be provided by highly-qualified experts. In case of surface treatment for sliding windows and doors (e.g. varnishing), all the hardware components must be excluded from treatment; they must also be protected against potential contamination, caused by surface treatment.

6.1 Maintaining the quality of surface treatment

In normal climate, the galvanized coating is not damaged by corrosion, as long as condensed water is not produced in hardware parts or if the condensed water quickly dries up.

In order to maintain long-lasting quality of surface treatment and prevent adverse corrosion effects, the instructions below must be followed:

- Hardware and window rebates must be thoroughly aired (particularly during the construction phase) by making sure that the elements mentioned are not exposed to moisture and condensed water,
- hardware must be protected against any covers or contamination with building materials (e.g. roughcast, dust, cement and the like),
- aggressive vapours in the sliding window or door rebate (e.g. formic acid and acetic acid, ammonia, amino- and ammonium compounds, aldehyde, phenol, tannic acid etc.) may quickly lead to corrosion of hardware components in combination with a small amount of condensed water; in case of aggressive vapours, thorough airing of rebates on the sliding windows and doors must be provided; this is particularly important for sliding windows and doors made of oak and other types of wood, containing a large amount of tannic acid,
- gaskets with acetic acid or acidic net structure or gaskets, containing the above mentioned ingredients must not be used, as the direct contact with the gasket and its vapours may corrode the hardware surface,
- hardware can only be cleaned with soft, ph-neutral cleaning agent in diluted form; aggressive, acidiferous cleaners or abrasive cleaning agents, containing the above mentioned ingredients, must not be used at any time.

7. Information and instructions

In order to carry out duties of informing and giving instructions and performing maintenance according to »Consumer Protection Act«, the following publications are available:

- »Catalogues« for designers and authorized dealers
- »Installation instructions« and »factory drawings« for manufacturers of windows and balcony doors,
- »Instructions for maintenance and cleaning« and
- »Instructions for use« for investors and users.

In order to ensure the functionality of the sliding hardware for windows and doors, the following rules must be observed:

- The designers are required to obtain information from the manufacturer or the authorized dealer, regarding the products, and act accordingly,
- the authorized dealers must pay attention to product information and the information mentioned herein, along with installation instructions, factory drawings and instructions for maintenance and cleaning; they must obtain instructions for use from the manufacturer and pass them on to manufacturers of sliding windows and doors,
- the manufacturers of sliding windows and doors must consider all the relevant product information and ask the manufacturer or authorized dealer for maintenance and
- cleaning instructions in particular, along with instructions for use and pass them on to investors and users.

All information regarding sliding hardware systems for windows and doors should be observed. In case of non-compliance the manufacturer is exempt from liability.



In-Line


[Basic schemes](#)
[Proposed guideline](#)
[Product portfolio](#)
[Detailed information](#)

HIGH-QUALITY, DURABLE, SIMPLE




ARX Coat – High quality surface protection

ARX Coat surface protection gives excellent appearance to building hardware and simultaneously ensures long-term and durable surface. It maintains very high corrosion resistance in severe conditions and extreme climate, exceeding Grade 5 of BS EN1670 (480 hours exposure to salt spray), thereby guaranteeing long-term and simple use.

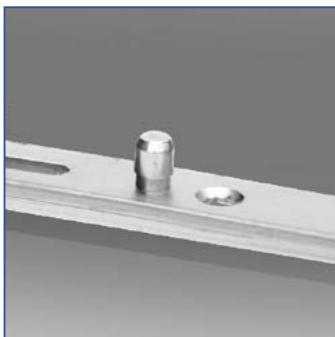


Anti-lift pin

This simple, yet innovative pin prevents the sliding window or door from being lifted off the rails, when in closed position.

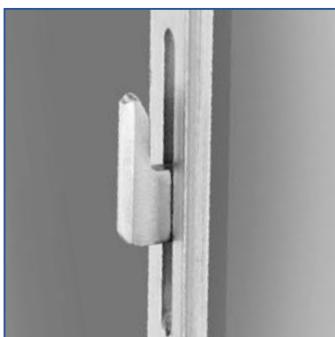

In-Line hook

Stainless steel in-line hooks offer increased security in comparison with security cams, but they lack the adjustment for gasket pressure.

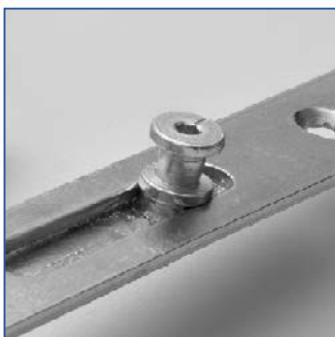


Security cam

Security cams are adjustable, so it is possible to adjust the cam to achieve better gasket pressure. With great level of compression adjustment (+/- 1 mm), it is a perfect solution for optimal sealing.

SYMBOLS LEGEND

Symbols

In the part describing the In-Line system, different symbols, diagrams and tables are used in order to provide a clear picture and demonstration of the hardware application. The meanings are as follows:



In-Line



Security cam




Rebate sash height



IL Hook



Rebate sash width



IL individual striker



Max. sash mass



Packaging






Material number




Length / dimension

Abbreviation	Description	Units
SRH	SASH REBATE HEIGHT	mm
SRW	SASH REBATE WIDTH	mm
BS	BACKSET	mm
H	NUMBER OF IL HOOKS	/
S	NUMBER OF SECURITY CAMS	/
L	LENGTH	mm
W	WIDTH	mm
M	MAX. LOAD FOR SET (2 PCS)	kg
Y	HEIGHT ADJUSTMENT	mm


SASH ARRANGEMENT

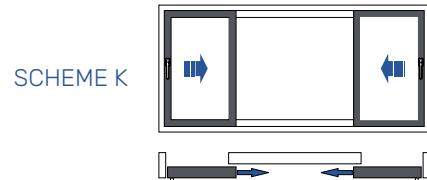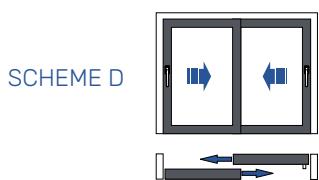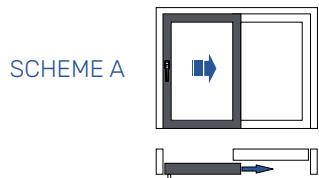

DIRECTION OF OPENING

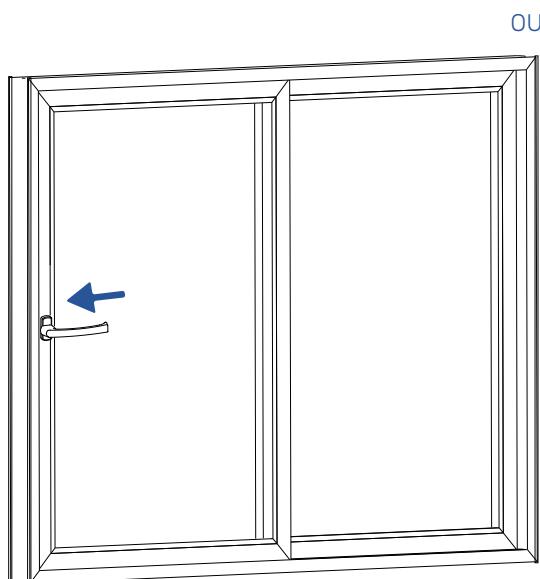


ARX - Left direction

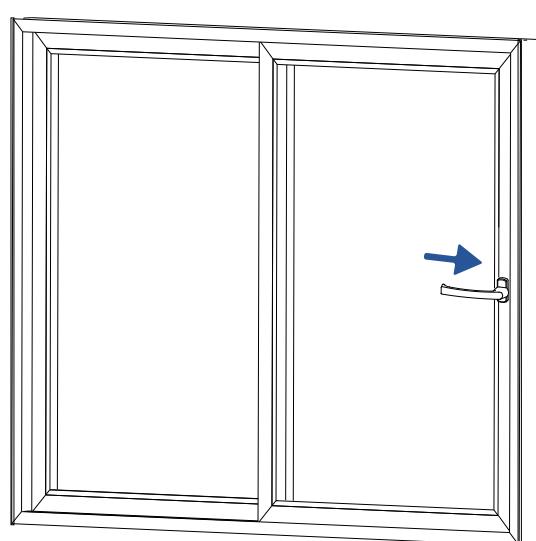

ARX - Right direction

Profile dimensioning for PVC

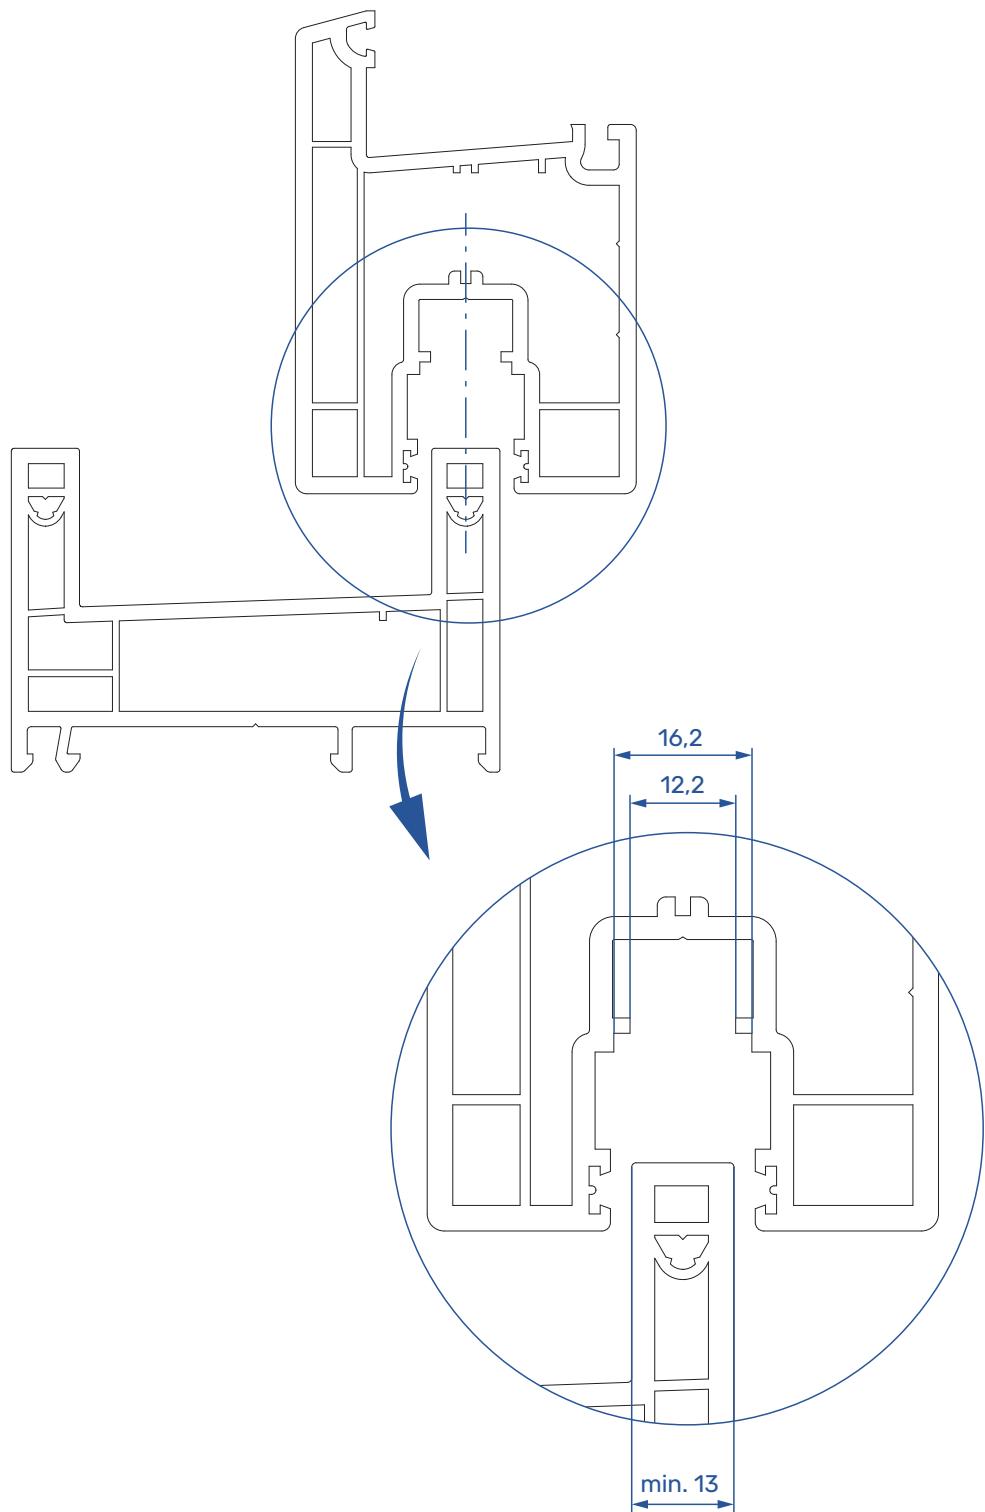


IN-LINE BASIC SCHEME

1 SINGLE ACTION ESPAGNOLETTES

CAM 8 mm | BS 7
CAM 8 mm | BS 17 | LOCKABLE
HOOK 5 mm | BS 17
HOOK 5 mm | BS 17 | LOCKABLE

PAGE 20
PAGE 21
PAGE 22
PAGE 22

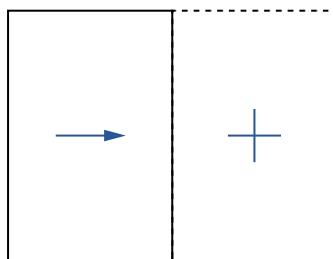

2 STRIKERS

INDIVIDUAL STRIKER
ONE PIECE STRIKER

PAGE 23
PAGE 23

3 ROLLERS

LIGHT ROLLER 100 kg
STANDARD ROLLER 150 kg
HEAVY DUTY ROLLER 200 kg

PAGE 24
PAGE 24
PAGE 24

4 IN-LINE HANDLES


HANDLE
HANDLE - LOCKABLE
POP-UP
POP-UP - LOCKABLE

PAGE 25
PAGE 25
PAGE 25
PAGE 25


5 ACCESSORIES

BUFFER STOP

PAGE 25

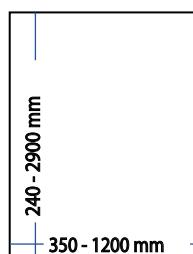

* MAX. SRW / SRH RATIO = 1 : 2,5

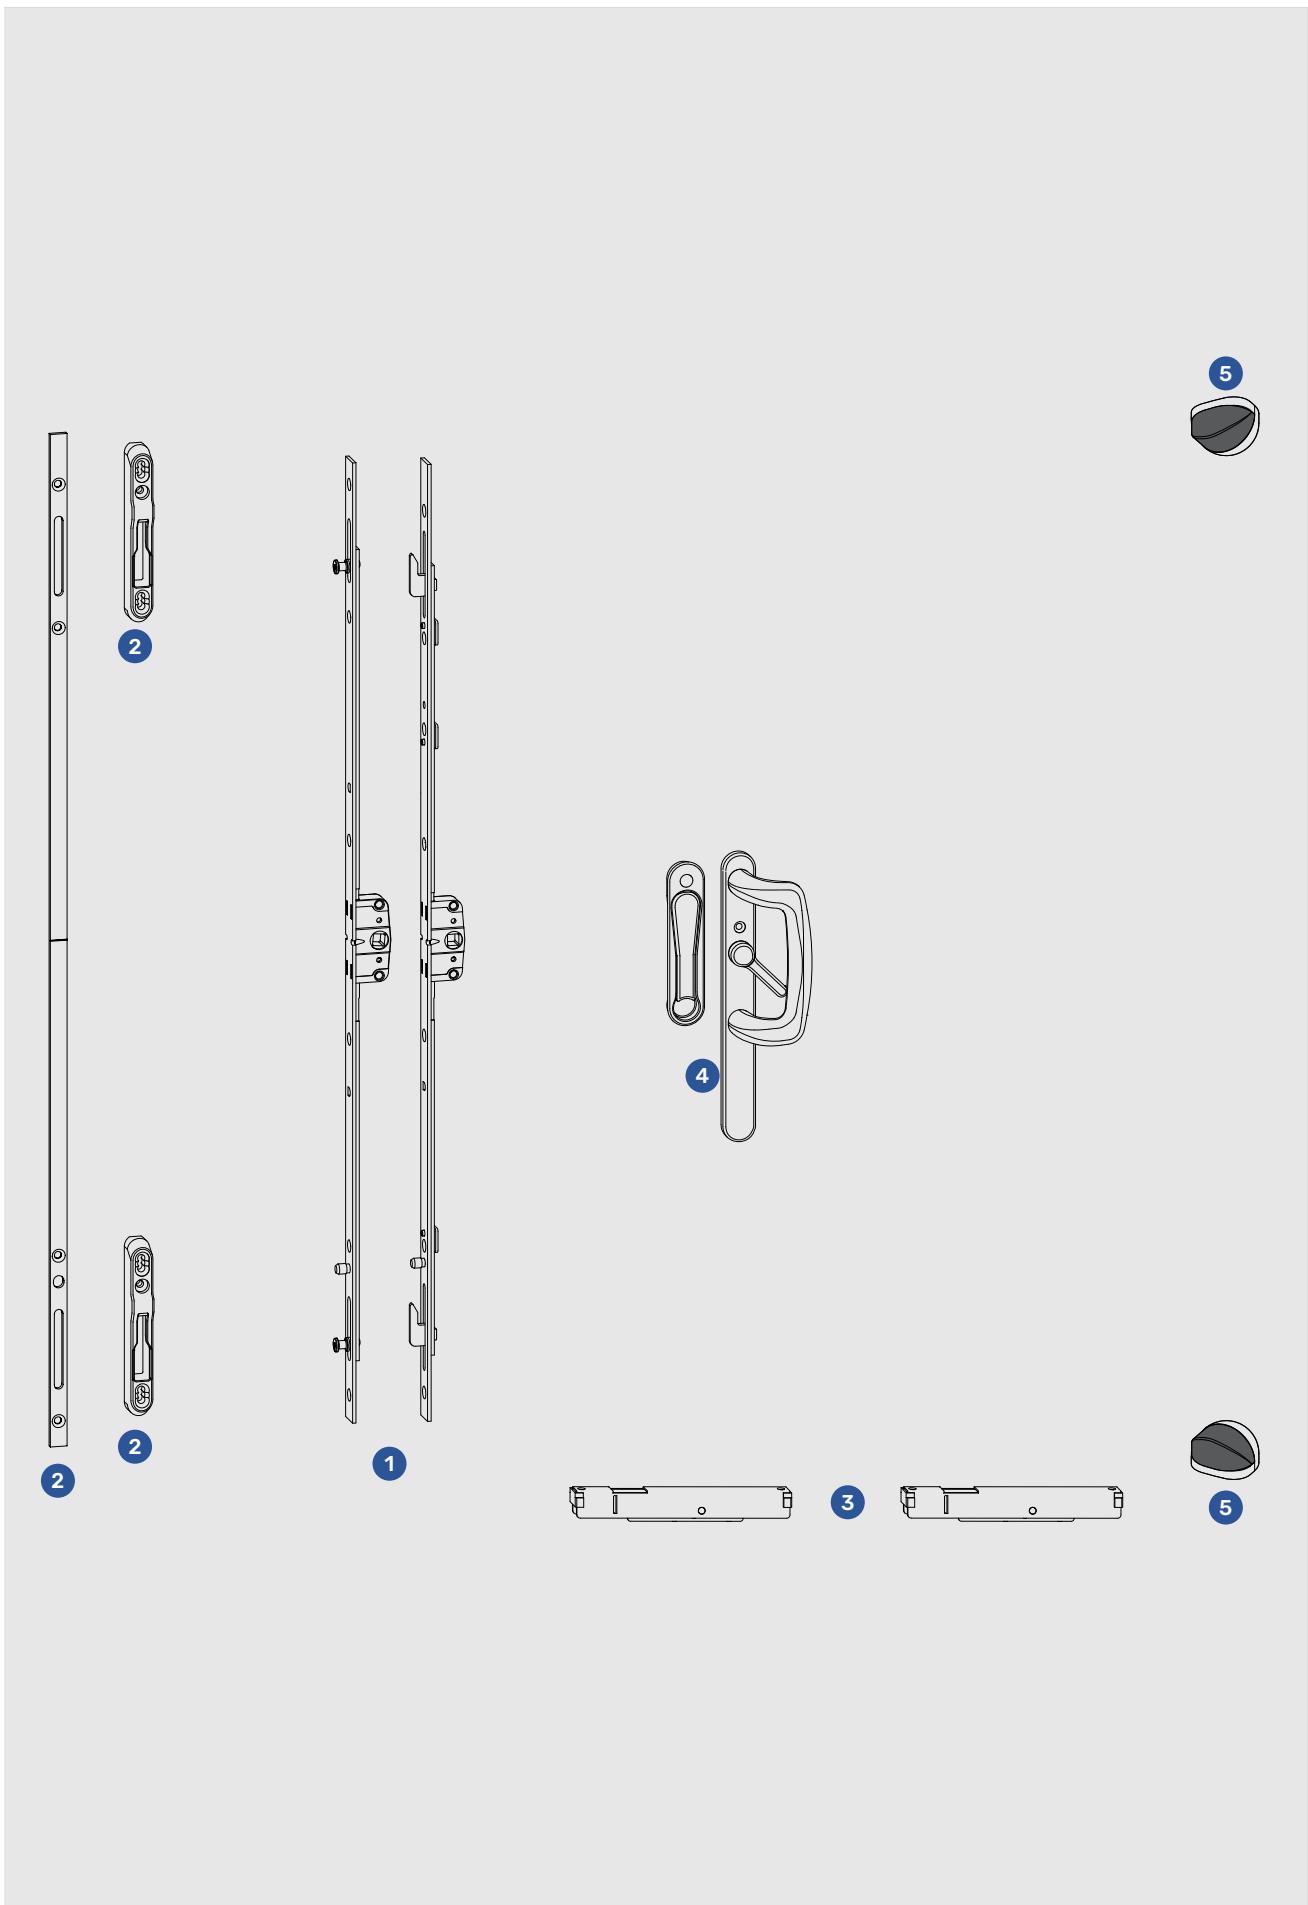


SINGLE ACTION IN-LINE ESPAGNOLETTE

CAM 8 mm || BS 7 mm

ESPAGNOLETTES



SRH	L	S	PACK	MATERIAL
400 - 600	400	2	10	1110657
601 - 800	600	2	10	1110658
801 - 1000	800	2	10	1110659
1001 - 1200	1000	3	10	1110660
1201 - 1800	1200	3	10	1110661
1801 - 2900	1800	4	10	1110662

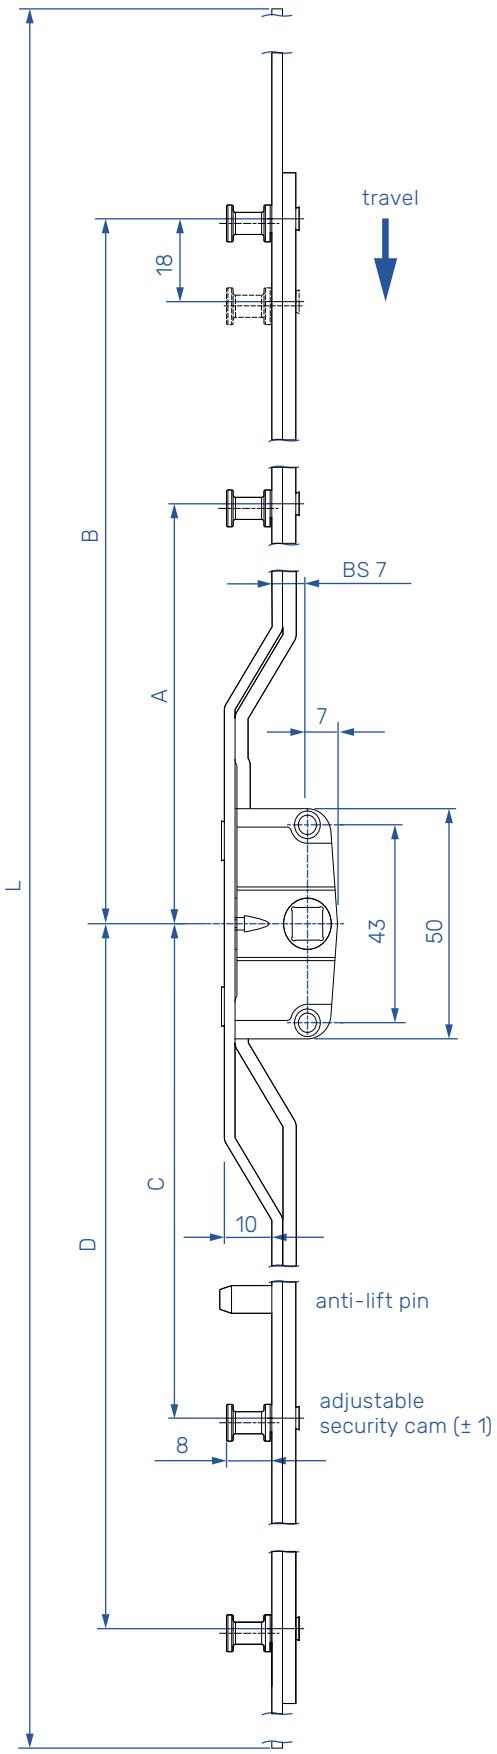

KEY DIMENSIONS OF ESPAGNOLETTES

L	A	B	C	D
400	.	143	.	127
600	.	243	.	227
800	.	343	.	327
1000	128	443	.	427
1200	128	543	.	527
1800	466	881	429	774

SINGLE ACTION IN-LINE ESPAGNOLETTE


CAM 8 mm || BS 17 mm

ESPAGNOLETTES

SRH	L	S	PACK	MATERIAL
240 - 400	240	2	10	1110663
400 - 600	400	2	10	1110664
601 - 800	600	2	10	1110665
801 - 1000	800	2	10	1110666
1001 - 1200	1000	3	10	1110667
1201 - 1800	1200	3	10	1110668
1801 - 2900	1800	4	10	1110669

LOCKABLE ESPAGNOLETTES

SRH	L	S	PACK	MATERIAL
1801 - 2900	1800	4	10	1110670

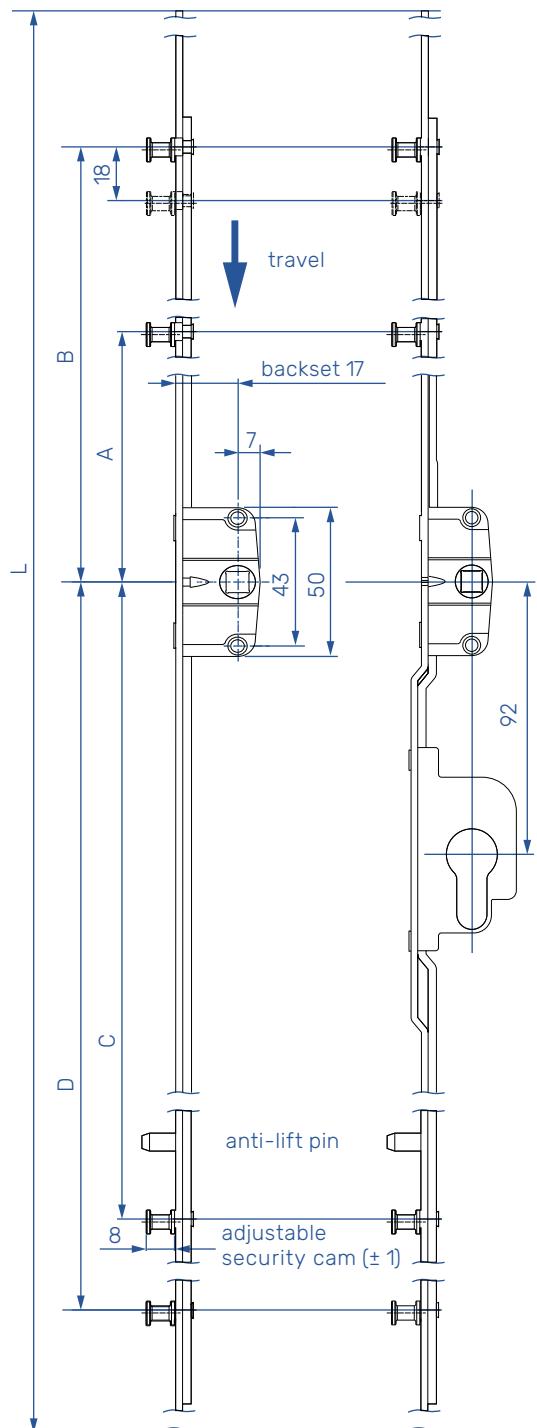

KEY DIMENSIONS OF ESPAGNOLETTES

L	A	B	C	D
240	.	88	.	72
400	.	143	.	127
600	.	243	.	227
800	.	343	.	327
1000	128	443	.	427
1200	128	543	.	527
1800	466	881	429	774

KEY DIMENSIONS OF LOCKABLE ESPAGNOLETTES


L	A	B	C	D
1800	466	881	429	774

SINGLE ACTION IN-LINE ESPAGNOLETTE

HOOK 5 mm || BS 17 mm


ESPAGNOLETTES

			PACK	MATERIAL
SRH 600 - 1800	L 600	H 2	PACK 10	MATERIAL 1110671
1801 - 2900	1800	4	10	1110672

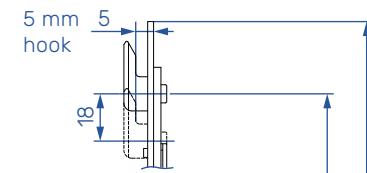

LOCKABLE ESPAGNOLETTES

			PACK	MATERIAL
SRH 1801 - 2900	L 1800	H 4	PACK 10	MATERIAL 1110673

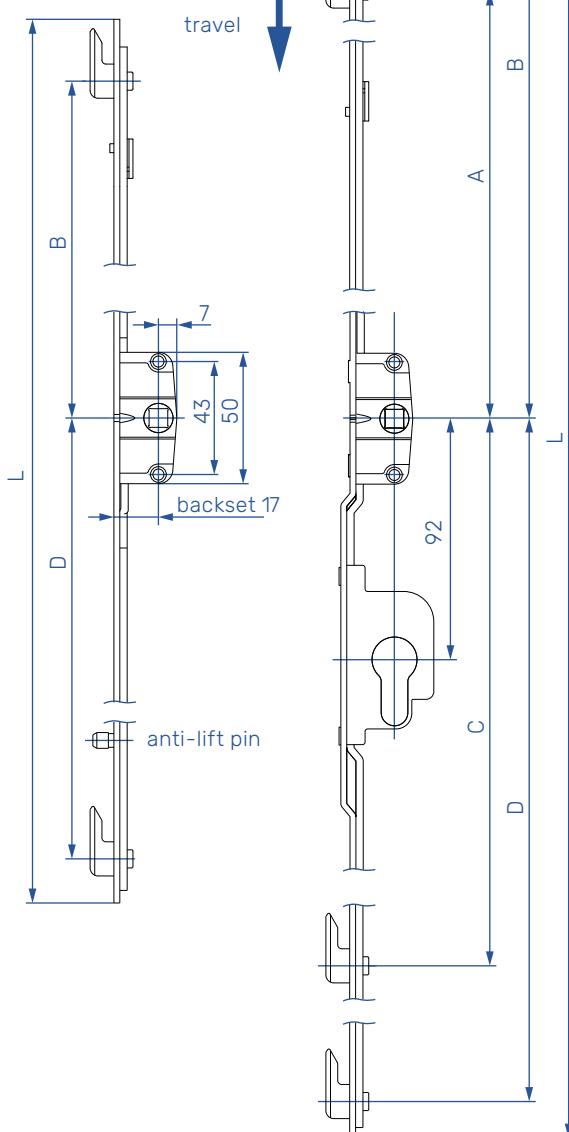

KEY DIMENSIONS OF ESPAGNOLETTES

L	A	B	C	D
600	.	243	.	228
1800	463	808	432	777


KEY DIMENSIONS OF LOCKABLE ESPAGNOLETTES

L	A	B	C	D
1800	463	808	432	777

STRIKERS

1 INDIVIDUAL IL STRIKERS

PROFILE	PACK	MATERIAL
ALUPLAST	100	1070140
EUROPA	50	1119188
FINS	100	1070141
ORTA	100	1070140
PROFINE KBE	100	1070140
PROFINE KOMMERLING	100	1070140
PROFINE KOMMERLING SF2 - LEFT	50	1007336
PROFINE KOMMERLING SF2 - RIGHT	50	1007335
PROFINE TROCAL	100	1070141
REHAU/DECEUNINCK	100	1129151
SCHUCO	100	1070140
THYSSEN	100	1070141
VEKA	100	1070141
VHS HALO	50	1119189

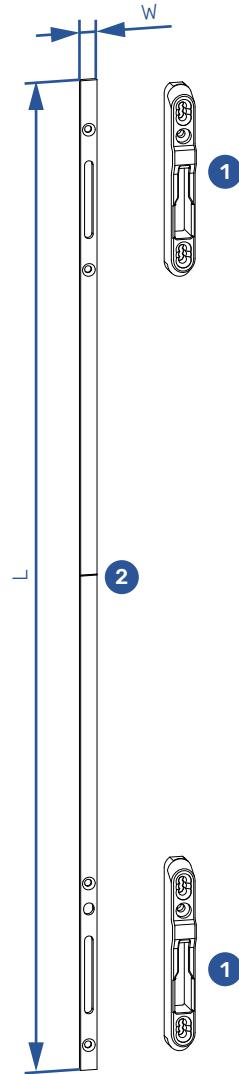

2 ONE PIECE IL STRIKERS

L	W	HOOK / CAM	PACK	MATERIAL
600	10	2	40	1110684
1800	10	4	10	1110685
1800	15	4	20	1110683
1800 ¹⁾	15	4	10	1110687

SCREWS FOR FIXING HARDWARE COMPONENTS



TYPE	DESCRIPTION	SIZE	MATERIAL
1	SCREW	4.2 x 25 mm	1134209
2	SCREW	4.2 x 35 mm	1134210




* ALL STRIKERS HAVE ANTI-LIFT PIN HOLE


¹⁾ WITH CL HOLDER - FOR GROOVE

ROLLERS

TYPE	DESCRIPTION	M	H	W	Y	L	PACK	MATERIAL
		max. 100 kg						
1	LIGHT-WEIGHT ROLLER	120	20	12	6	157	1	1091223
2	STANDARD ROLLER	150	20	12	7	158	1	1117159
3	HEAVY-DUTY ROLLER	200	20	16	5	153	1	1088924

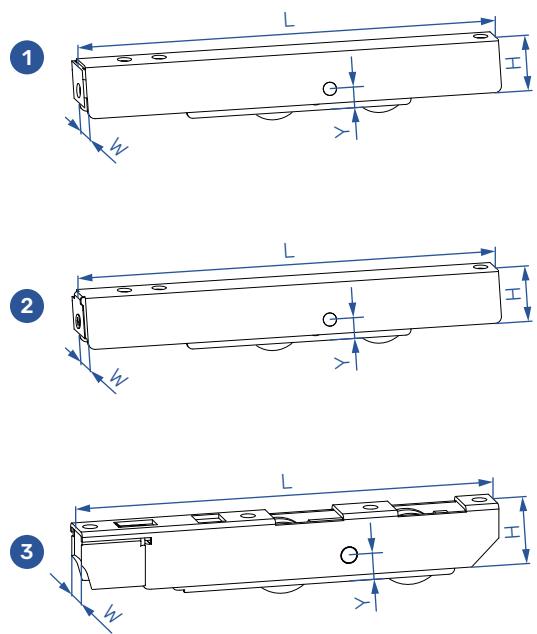


ROLLER HEIGHT ADJUSTMENT TOOLS

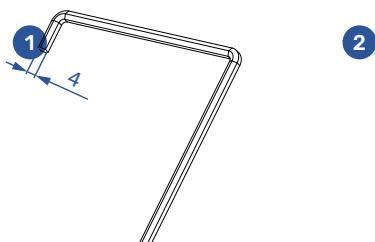


TYPE	DESCRIPTION	ROLLER	SIZE	MATERIAL
1	HEX KEY	1, 3	4 mm	1095750
2	SCREW DRIVER	2	PH 3	1080695

HANDLES


TYPE	DESCRIPTION	COLOR	PACK	MATERIAL
1	IN-LINE HANDLE	WHITE	1	1117161
		BLACK	1	1117163
		CHROME	1	1130974
		GOLD	1	1130976
		SILVER	1	1130978
2	IN-LINE HANDLE LOCKABLE	WHITE	1	1117160
		BLACK	1	1117162
		CHROME	1	1130975
		GOLD	1	1130977
		SILVER	1	1130979
3	POP-UP HANDLE	WHITE	30	1014302
4	POP-UP HANDLE LOCKABLE	WHITE	30	1014303

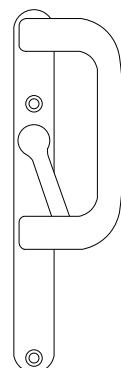


1

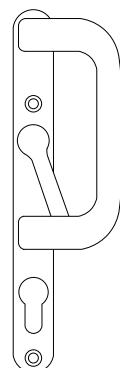

2




3

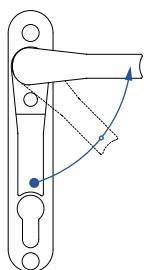


4

BUFFER STOP

TYPE	DESCRIPTION	COLOR	PACK	MATERIAL
1	BUFFER STOP WITH RUBBER	GREY BROWN	100	1120498
		BLACK	100	1120512
		WHITE	100	1120495
		SILVER	100	1120516
2	RUBBER	BLACK	100	1120500

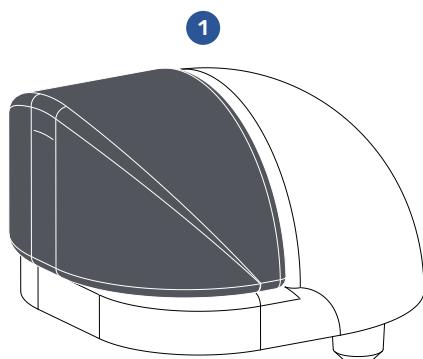


1

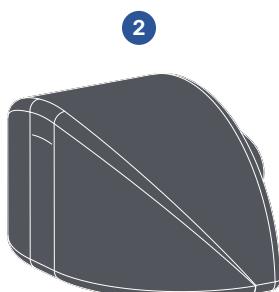


2

SASH PROFILE TREATMENT


BS 7 - non lockable

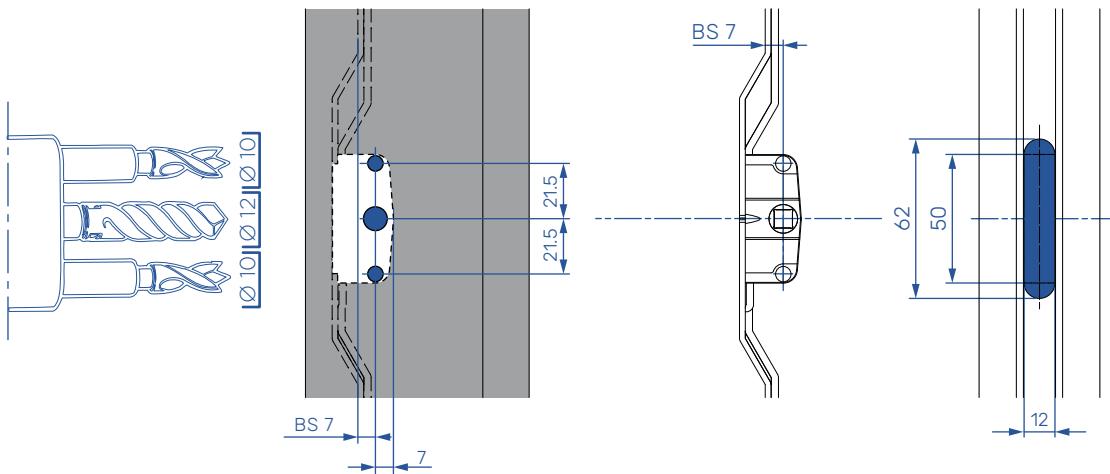


BS 17 - non lockable

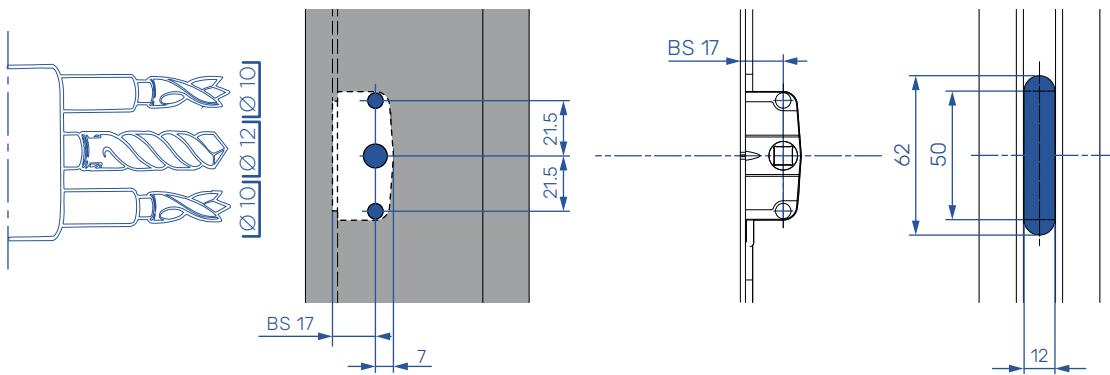

BS 17 - lockable

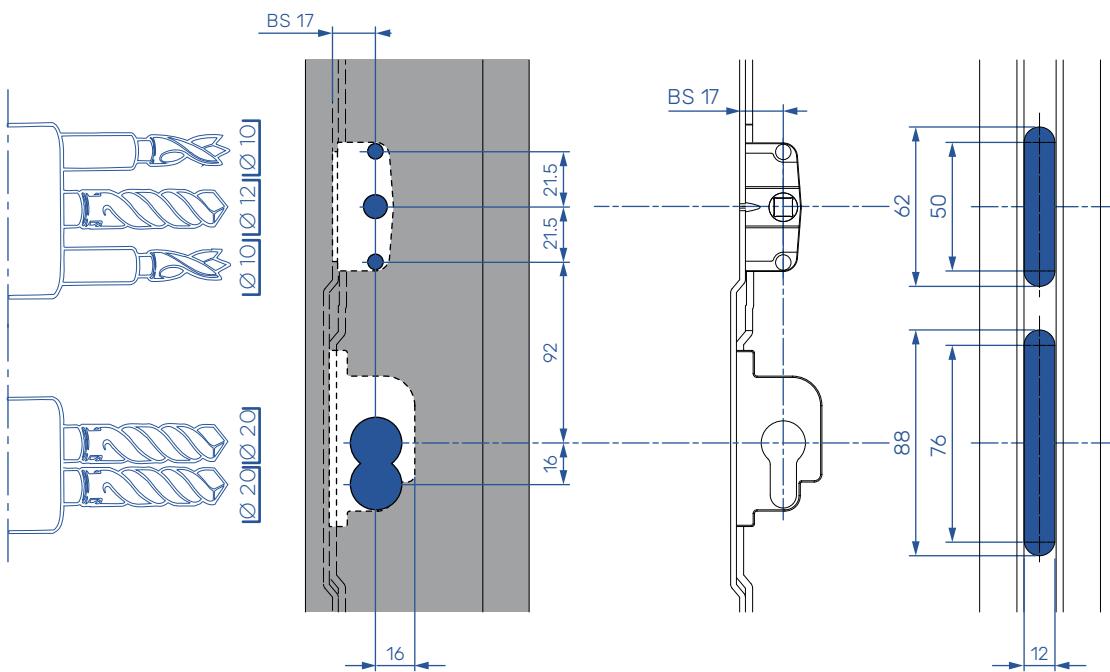

INDIVIDUAL STRIKER POSITIONING

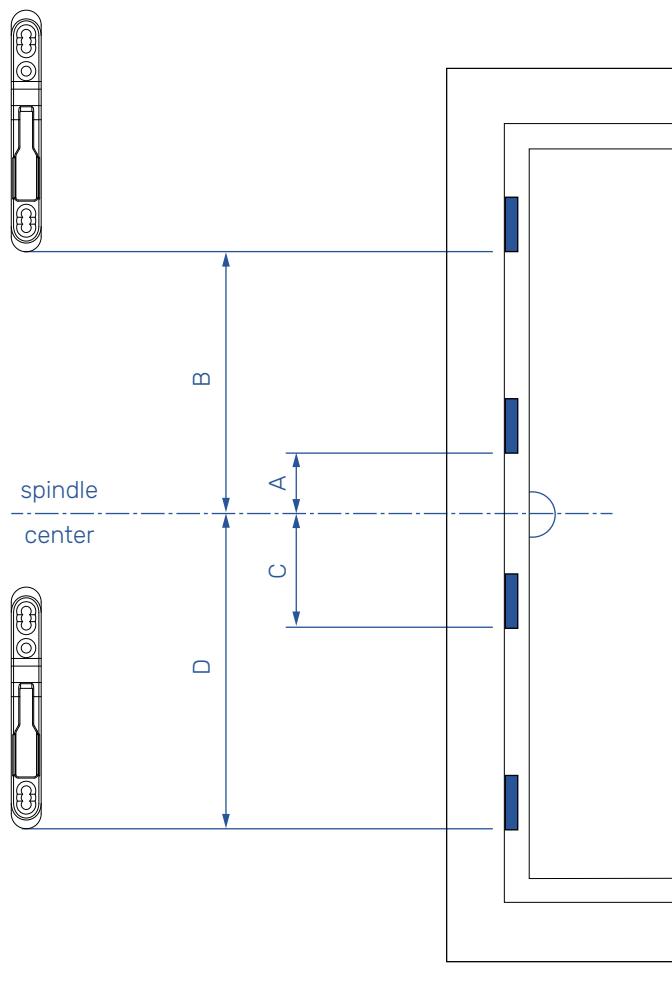

ESPAG. - CAM 8 mm || BS 7 mm

L	CAM	A	B	C	D
400	2	.	93	.	177
600	2	.	193	.	277
800	2	.	293	.	377
1000	3	78	393	.	477
1200	3	78	493	.	577
1800	4	416	761	479	824

ESPAG. - HOOK 5 mm || BS 17 mm

L	HOOK	A	B	C	D
600	2	.	489	.	281
1800	4	411	756	484	829
1800 ¹⁾	4	411	756	484	829



ESPAG. - CAM 8 mm || BS 17 mm

L	CAM	A	B	C	D
240	2	.	38	.	122
400	2	.	93	.	177
600	2	.	193	.	277
800	2	.	293	.	377
1000	3	78	393	.	477
1200	3	78	493	.	577
1800	4	416	761	479	824
1800 ¹⁾	4	416	761	479	824


¹⁾ LOCKABLE

LOCKING CAM ADJUSTMENT INSTRUCTIONS

ADJUSTMENT

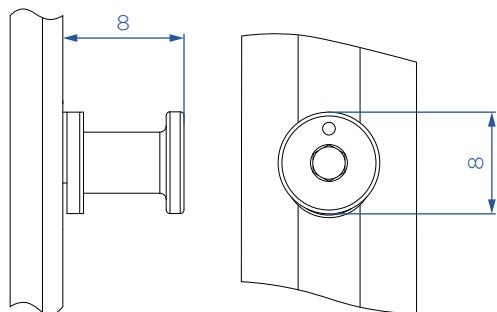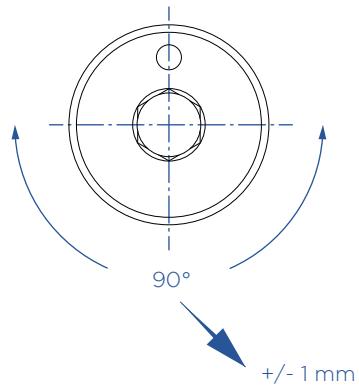


SECURITY CAM ADJUSTMENT TOOL

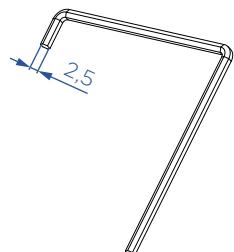

HEX KEY 2,5 mm

DESCRIPTION	SIZE	MATERIAL
HEX KEY	2,5 mm	/

MAINTENANCE INSTRUCTIONS

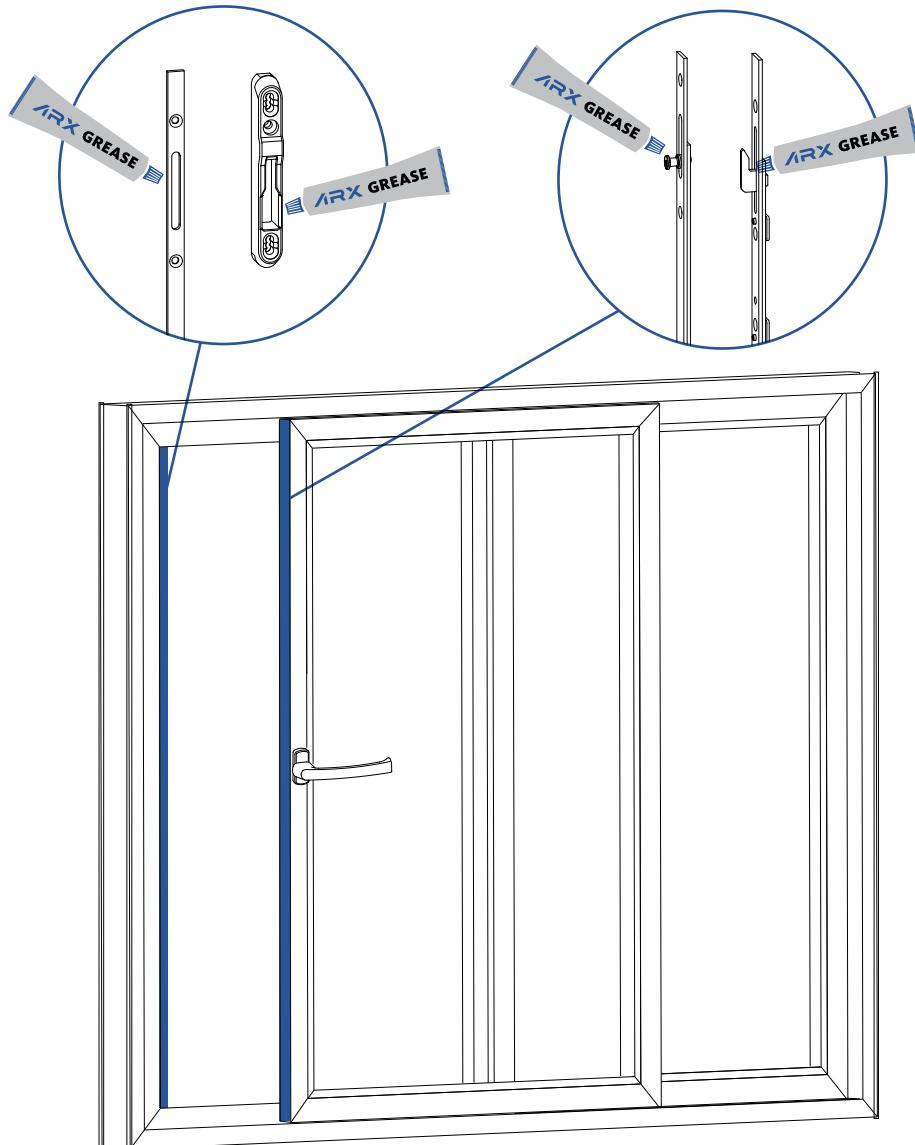

Regular greasing and oiling of operation-relevant components in the sash and frame is recommended at least once a year. In case of frequent use as in schools, hotels the oiling is recommended once in six months.

Acid free and non-resinous grease and/or oil from a specialized dealer must be used.



DESCRIPTION	MATERIAL
ARX - HIGH QUALITY HARDWARE GREASE	1055144





HKS & SP

Basic schemes
Proposed guideline
Product portfolio
Detailed information

HIGH-QUALITY, DURABLE, SIMPLE



ARX Coat – High quality surface protection

ARX Coat surface protection gives excellent appearance to building hardware and simultaneously ensures long-term and durable surface. It maintains very high corrosion resistance in severe conditions and extreme climate, exceeding Grade 5 of BS EN1670 (480 hours exposure to salt spray), thereby guaranteeing long-term and simple use.



R cam

R cams incorporate a regulatory function which allows installer or user to optimize the window compression by +/- 1.2mm, thereby improving the sealing properties of windows and balcony doors. Moreover, the R cams provide smoother operation to window users who only need to apply a minimum force in order to operate the handle.



RS cam

RS cams provide superior level of security at closing points (with security strikers). Their height adjusts automatically to fit the air-gap between sash and frame. The compression can be regulated by +/- 0.8mm (hex key size 2.5 or spanner size 10). The rolling cam enables smoother and easier closing operation. RS cams can be used in combination with both security strikers or standard strikers.



Imprinted bumps on faceplate


ARX's easy move is additionally helped by imprinted bumps on faceplates which successfully reduce friction and surface protection wear.



Center locks and DK M espagnolettes – uniform length


All center locks for slide hardware are made in uniform length with DK M espagnolettes. Both are made in same lengths and with the same number of cams.

HIGH-QUALITY, DURABLE, SIMPLE

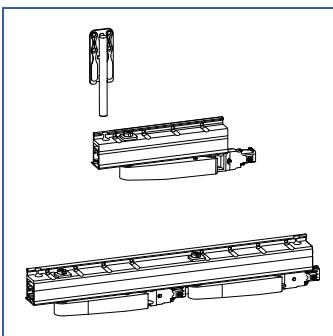


SP - max. sash weight up to 200 kg

For smaller sliding windows and doors, you can choose basic SP bogies set, which are meant to work at maximum load 160 kg. When choosing TWIN bogies with bigger sashes, this max. load capacity increases to 200 kg. That way, you can enjoy more, observing the nature through large glass window.

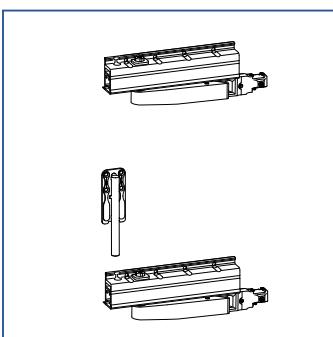


HKS - max. sash weight up to 160 kg

For smaller sliding windows and doors, you can choose basic HKS bogies set, which are meant to work at maximum load 100 kg. When adding support arms on bogies, this max. load capacity increases to 160 kg.

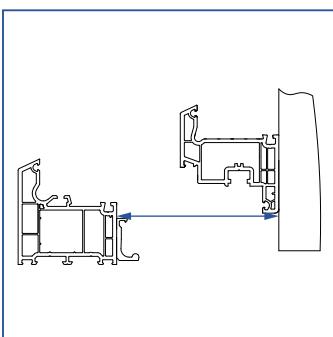


Opening width

This system allows for the sash to move from the frame up to 125 mm away. This proves that it is an excellent choice, when it comes to deep sash profiles.

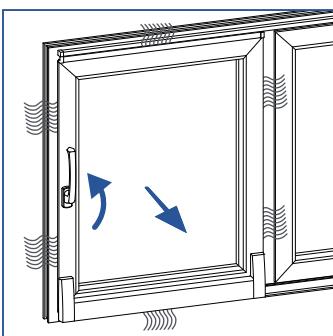

SP - night ventilation

When turning the handle up, the sash retracts from the frame for 5 mm. That way the sash is securely in place because of the combination of SP strikers and RS cams. The opening between the sash and the frame allows for the air to circulate and ventilate the inside of your home.

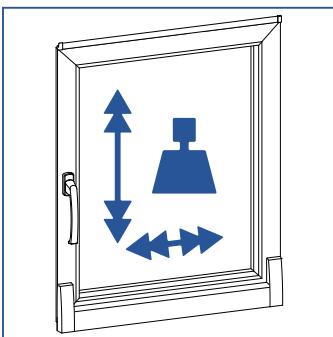


Large dimensions & heavy loads

Thanks to the rugged design of its stays and bogies, the hardware can be used for sash rebate heights of up to 2700 mm. This fitting system is meeting the architectonic challenge for floor-to-ceiling window doors.


SYMBOLS LEGEND

Symbols


In the part describing the Tilt & Slide and Retract & Slide systems, different symbols, diagrams and tables are used in order to provide a clear picture and demonstration of the hardware application. The meanings are as follows:




Tilt & Slide




Retract & Slide



Rebate sash height



Rebate sash width



Handle height



R cam



RS cam



Night vent



Warning



Max. sash mass



Material number



Orientation / position



Hardware shortening



R cam




RS cam




Standard striker



Security striker



T&Ti security striker



SP striker



Screws



Packaging




Length / dimension


	Abbreviation	Description	Units
	SRH	SASH REBATE HEIGHT	mm
	SRW	SASH REBATE WIDTH	mm
	HH	HANDLE HEIGHT	mm
	BS	BACKSET	mm
	M	MAX. SASH MASS	kg
	SRH : SRW	MAX. RATIO BETWEEN SRH AND SRW	/

SASH ARRANGEMENT


SCHEME A



SCHEME GA




SCHEME K

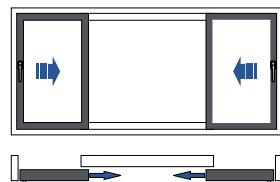

DIRECTION OF OPENING

OUTSIDE

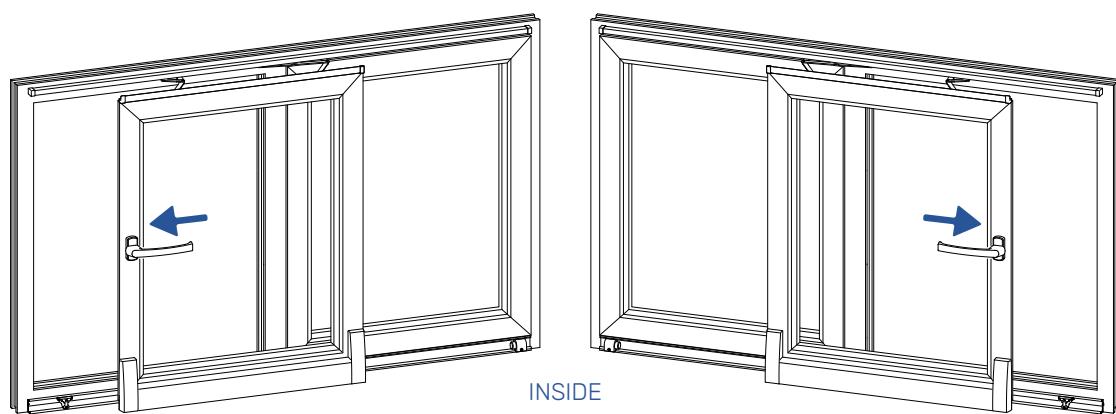

DIN EN 12519 - Right


ARX - Left direction

DIN EN 12519 - Left

ARX - Right direction


COMPARISON OF HKS & SP SYSTEM OPENING

TILT & SLIDE - HKS

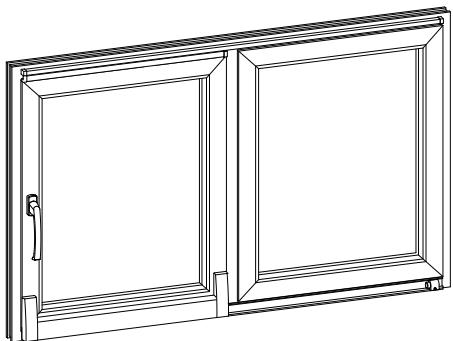


CLOSED POSITION


RETRACT & SLIDE - SP

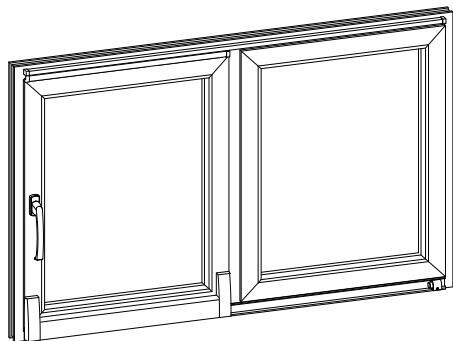


CLOSED POSITION

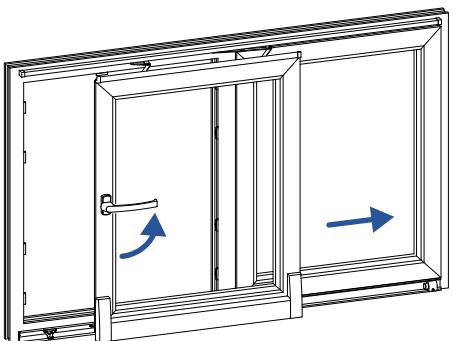


SLIDE POSITION

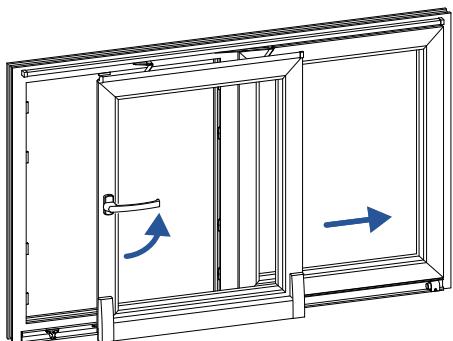

SLIDE POSITION

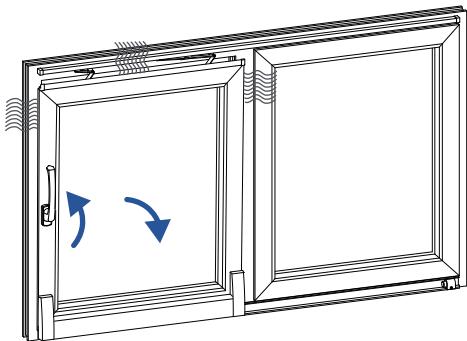


TI LT POSITION

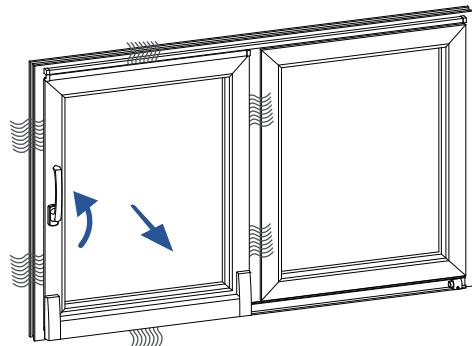

VENTILATION POSITION

PROFILE RECOMMENDATION

Profile dimensioning for PVC

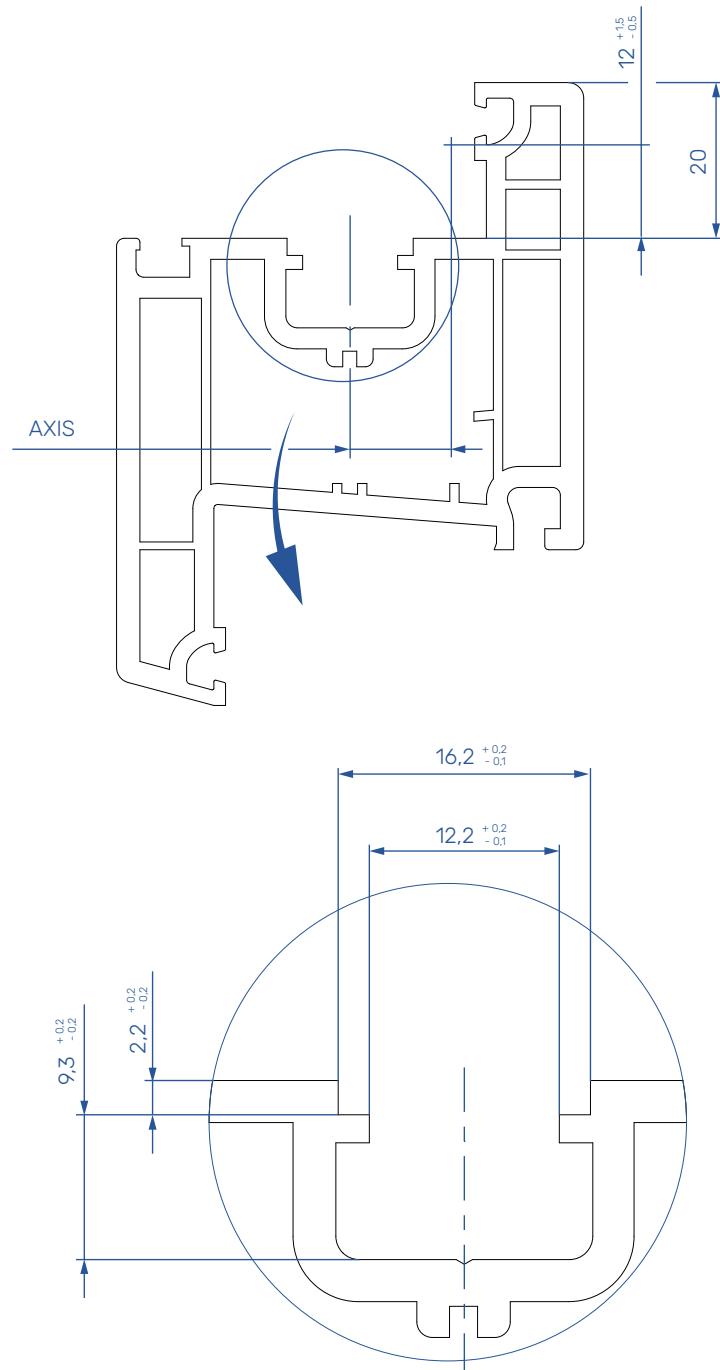


AXIS = 13 mm

APPLICATION DIAGRAMS

Tilt & Slide - HKS


Tilt & Slide - HKS 160 kg

APPLICATION DIAGRAM

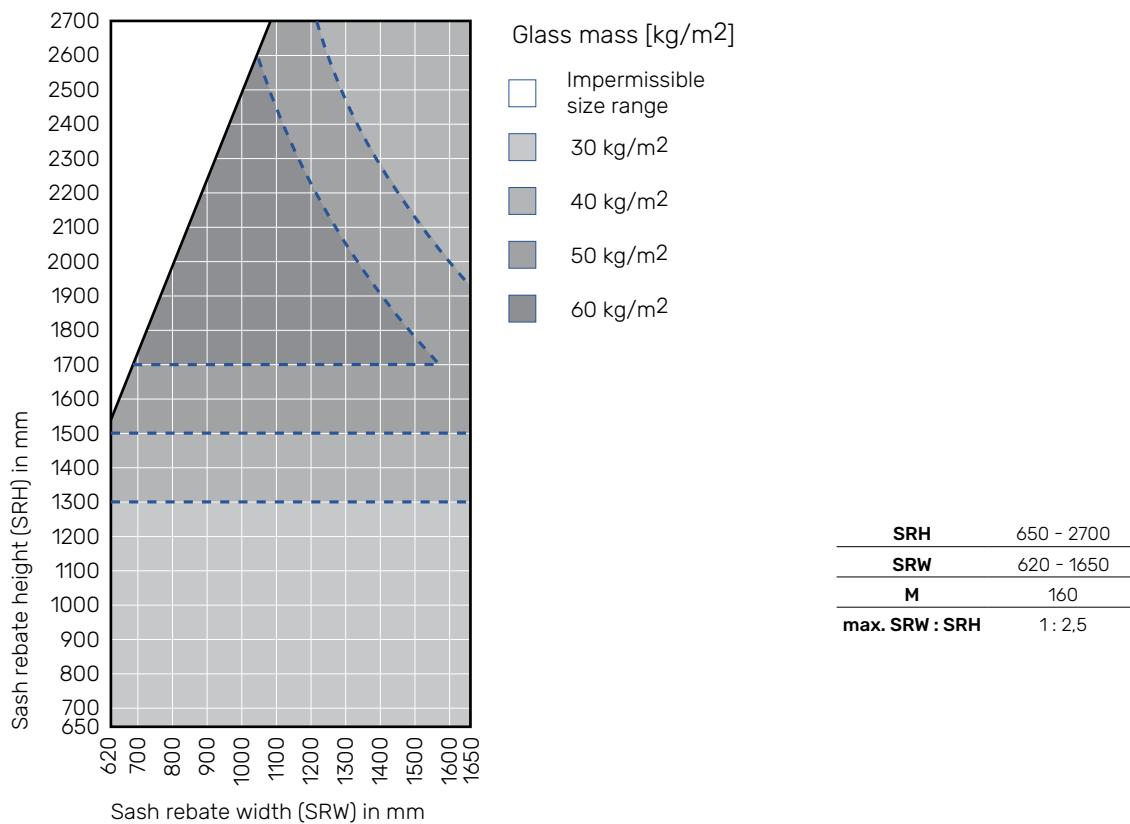

Tilt & Slide - HKS 100 kg


APPLICATION DIAGRAM

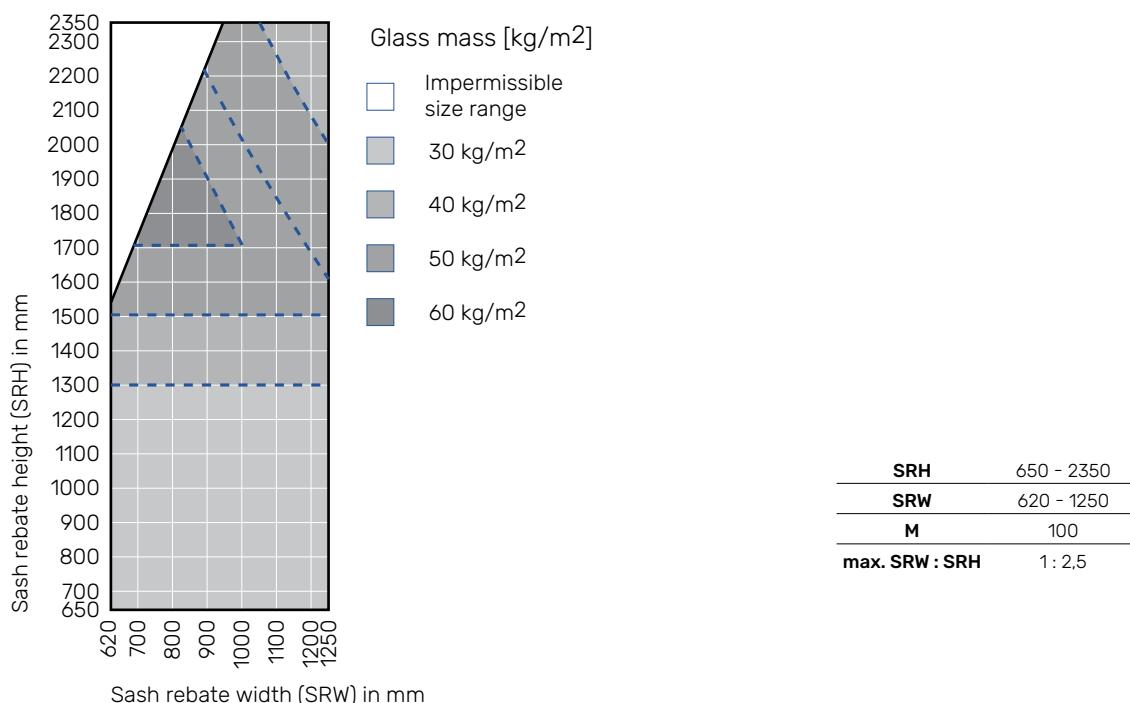


APPLICATION DIAGRAMS

Retract & Slide - SP

Retract & slide - SP 200 kg

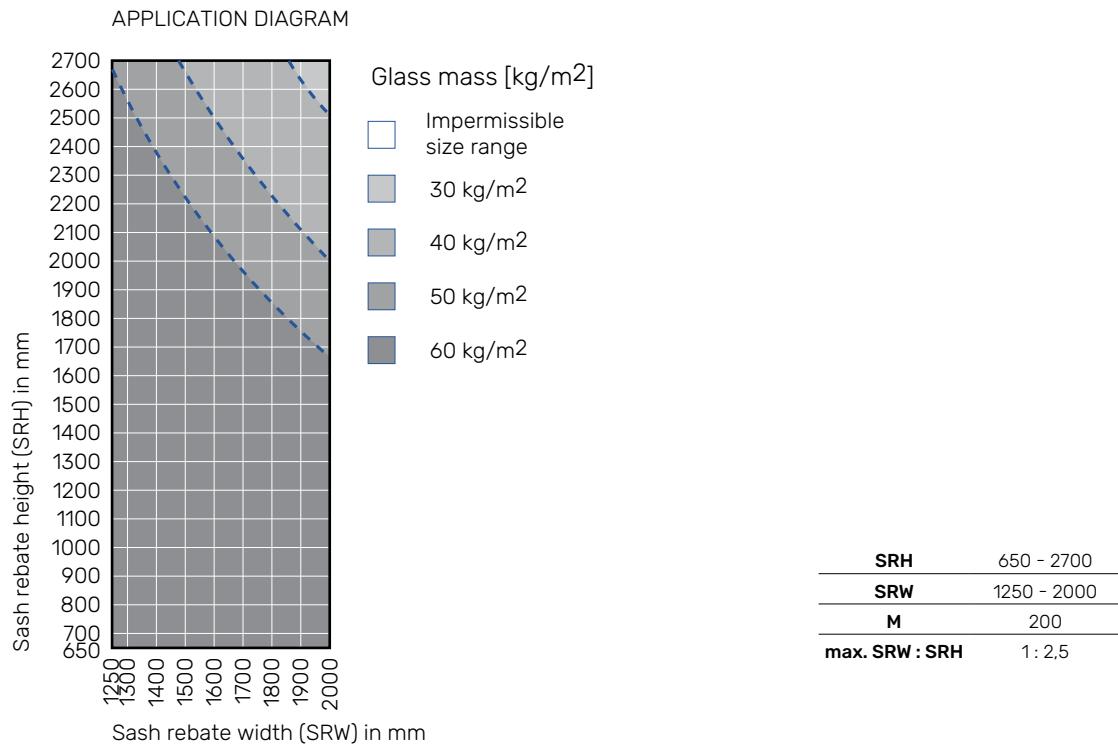


Retract & slide - SP 160 kg

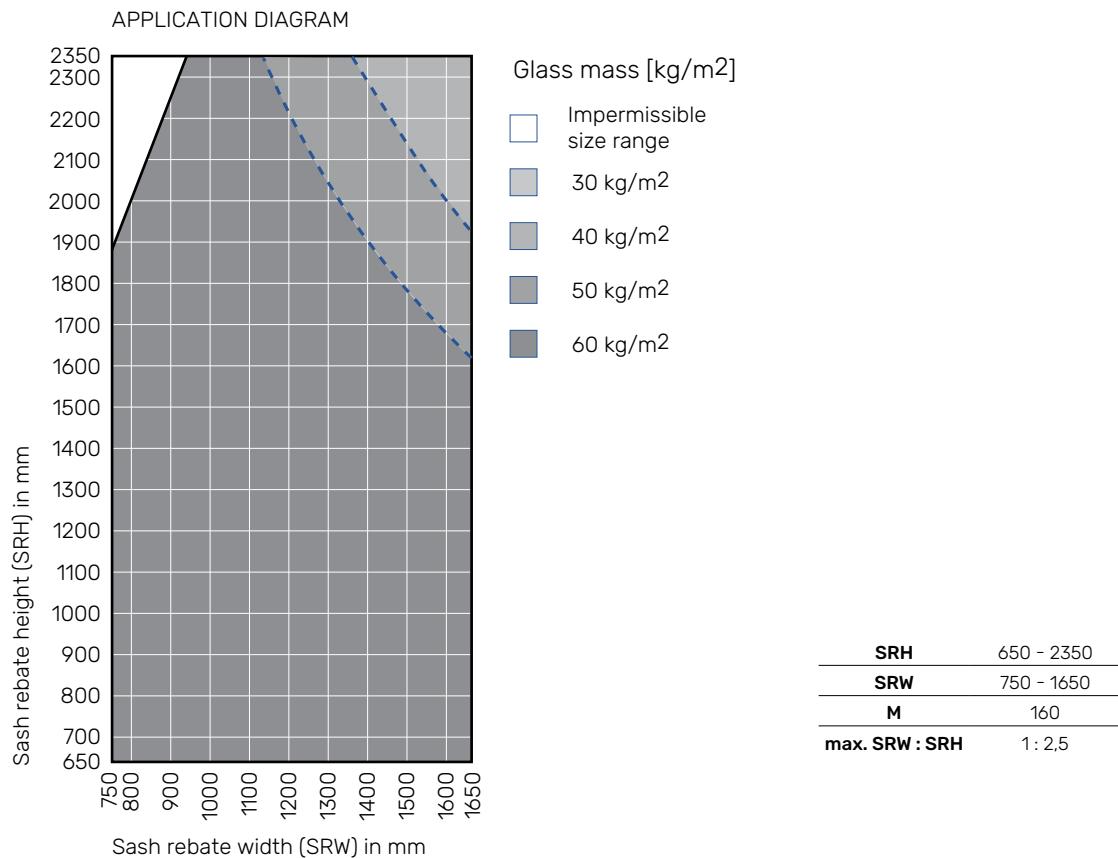


TILT & SLIDE - HKS 100 / 160 BASIC SCHEME

- 1 BOGIES SET PAGE 58
- 2 SET OF RAILS PAGE 54
- 3 STAY SYSTEM PAGE 56
- 4 COVER CAP PAGE 59
- 5 SET 160 kg (COVER CAP & SUPPORT ARM) PAGE 59
- 6 T&T ESPAGNOLETTE
 - T&T ESPAGNOLETTE M BS14,5 PAGE 44
 - T&T ESPAGNOLETTE M BS>14,5 PAGE 45
 - T&T ESPAGNOLETTE M BS>14,5 LOCKABLE PAGE 46
 - T&T ESPAGNOLETTE KV BS14,5 PAGE 47
- 7 CORNER DRIVE - TOP PAGE 48
- 8 CORNER DRIVE RS - BOTTOM PAGE 48
- 9 SLIDE CENTER LOCK - VERTICAL PAGE 49
- 10 SLIDE CENTER LOCK - HORIZONTAL PAGE 49
- 11 STRIKERS
 - STRIKER PAGE 50
 - T&TI STRIKER PAGE 51

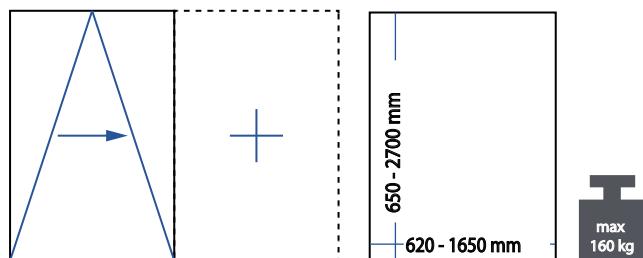


* MAX. SRW / SRH RATIO = 1 : 2,5
* HKS 100 CHOOSE 4 / HKS 160 CHOOSE 5

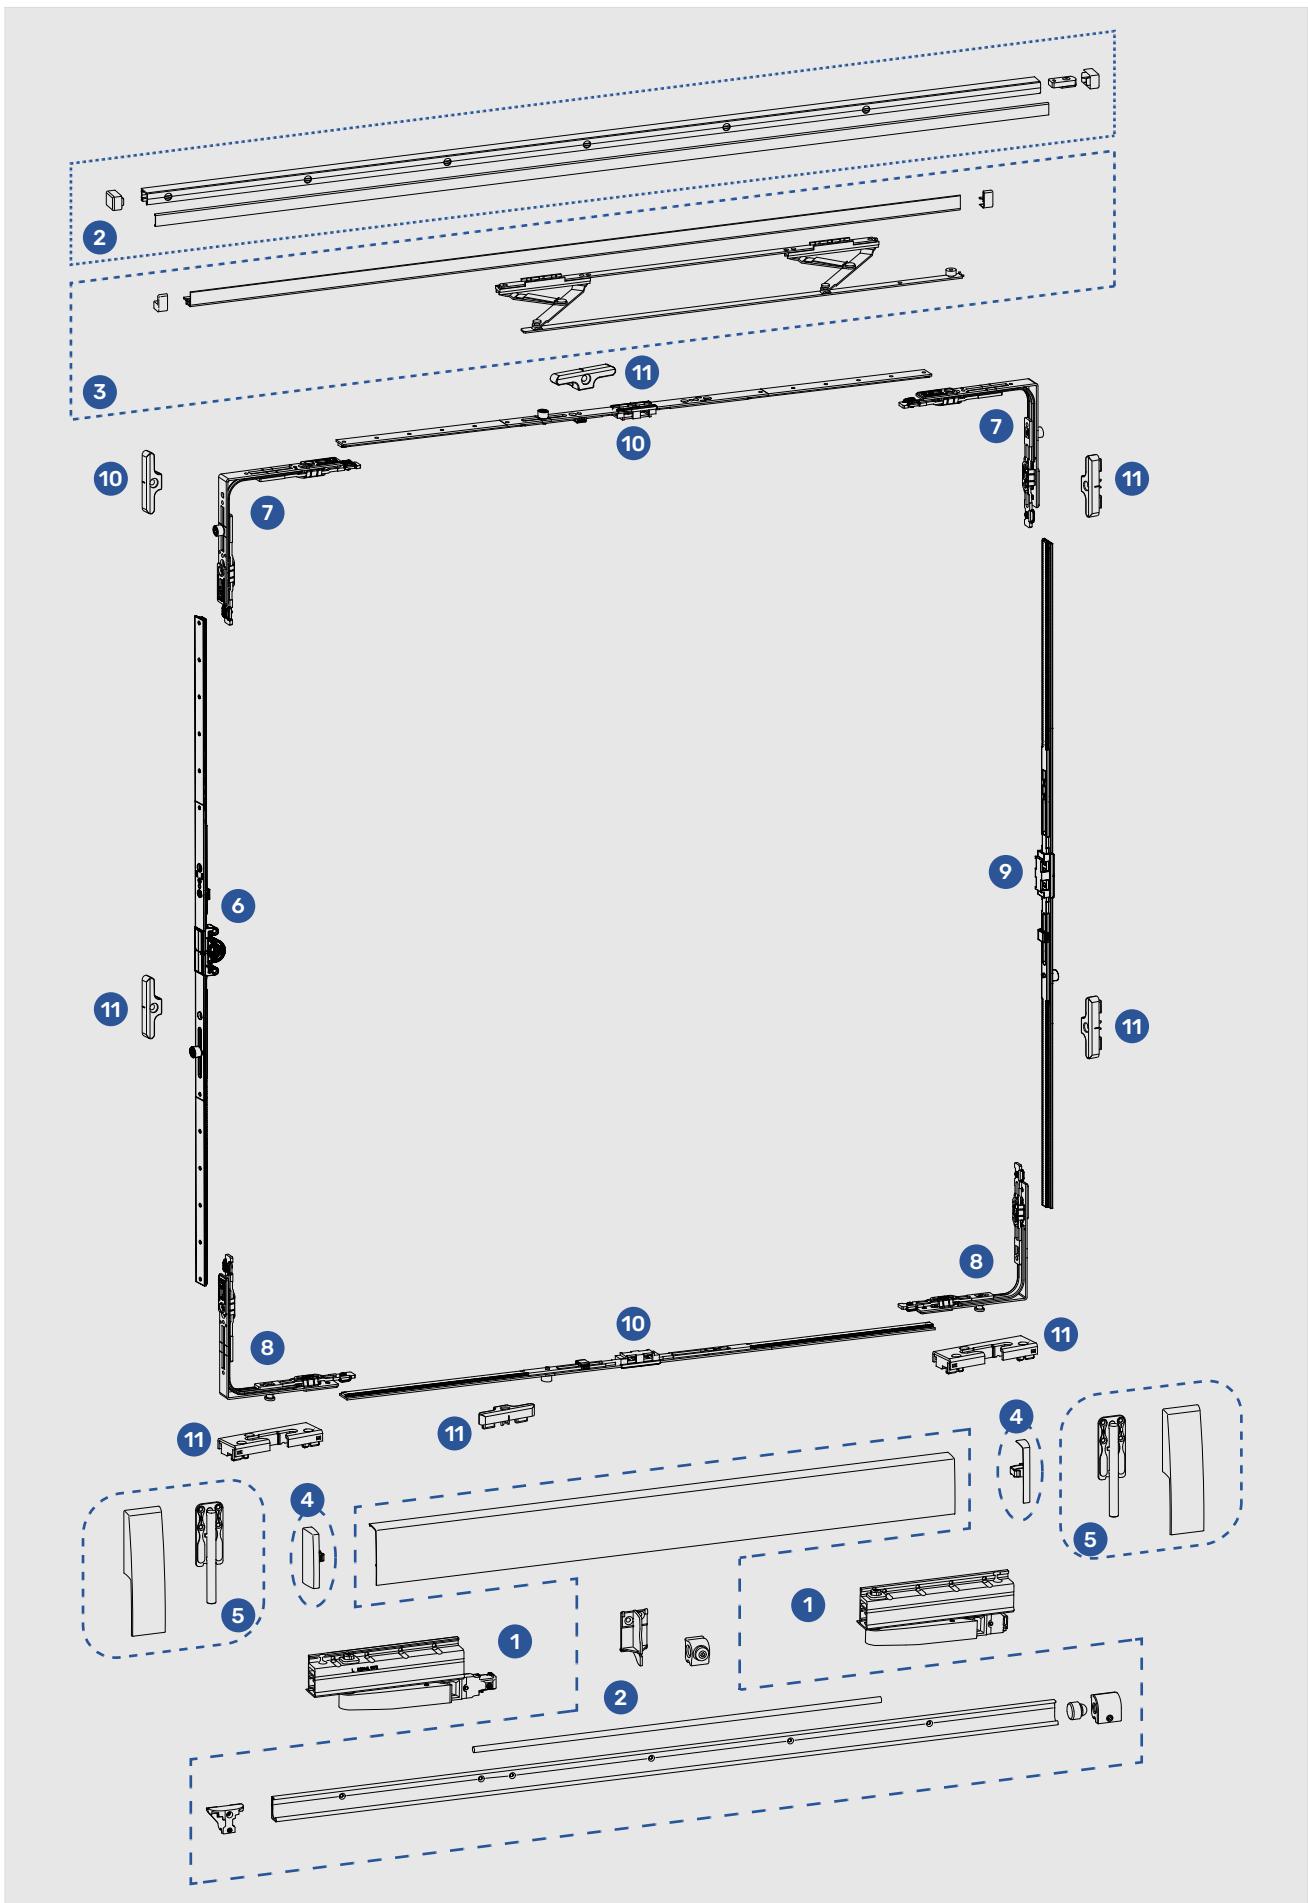


RETRACT & SLIDE - SP 160 / 200 BASIC SCHEME

- 1 BOGIES SET PAGE 58
- 2 SET OF RAILS PAGE 55
- 3 STAY SYSTEM PAGE 57
- 4 T&T ESPAGNOLETTE PAGE 44
T&T ESPAGNOLETTE M BS14,5
T&T ESPAGNOLETTE M BS>14,5
T&T ESPAGNOLETTE M BS>14,5 LOCKABLE
T&T ESPAGNOLETTE KV BS14,5
PAGE 45
PAGE 46
PAGE 47
- 5 CORNER DRIVE RS PAGE 48
- 6 SLIDE CENTER LOCK - VERTICAL PAGE 49
- 7 SLIDE CENTER LOCK - HORIZONTAL PAGE 49
- 8 STRIKERS PAGE 50
STRIKER
SP STRIKER PAGE 53

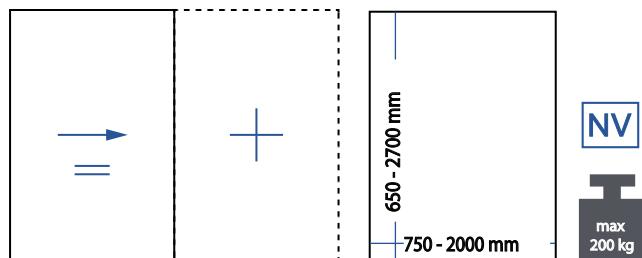


* MAX. SRW / SRH RATIO = 1 : 2,5

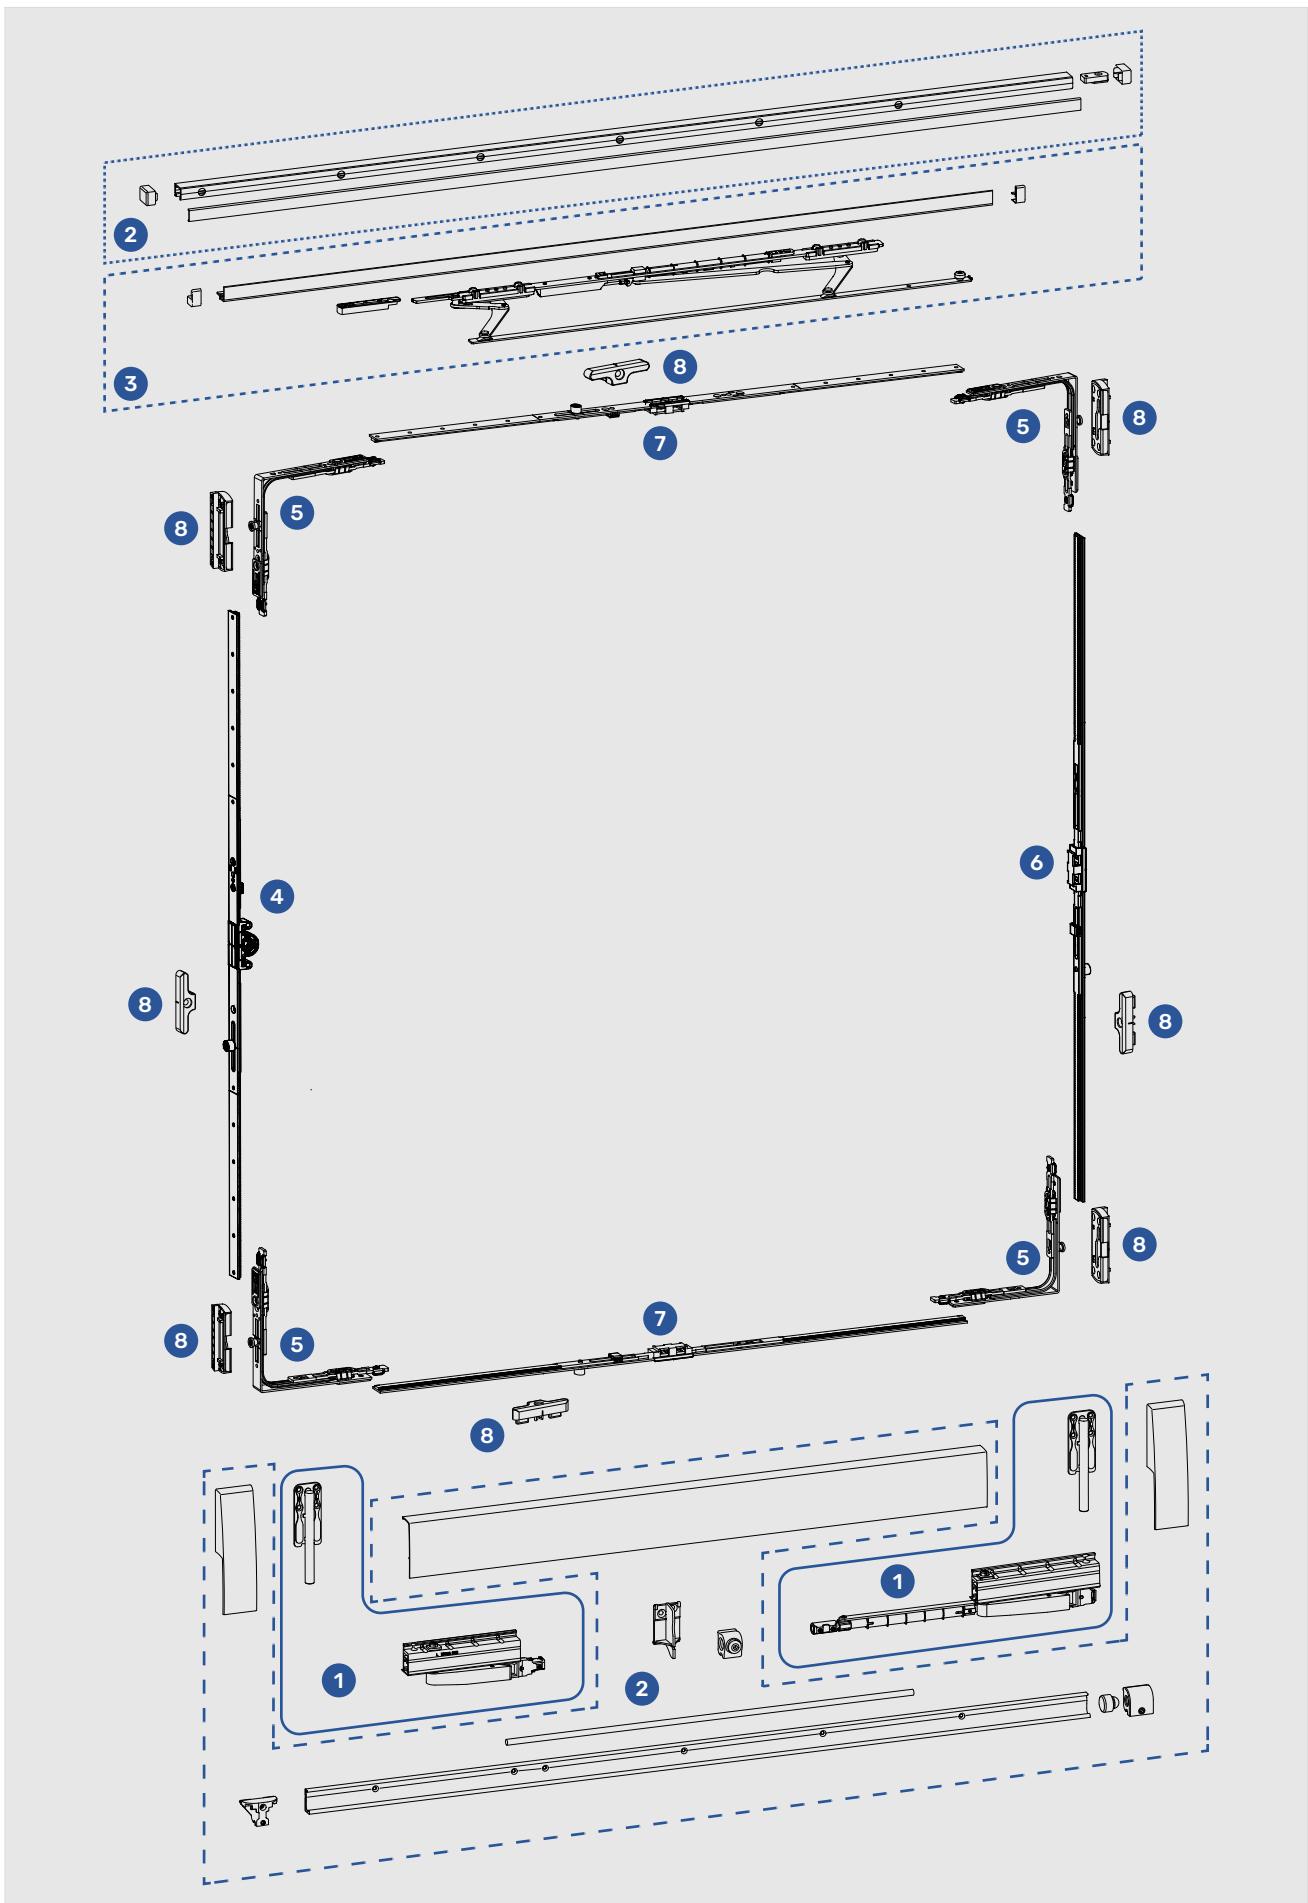

T&T ESPAGNOLETTE M

Centered / variable handle height

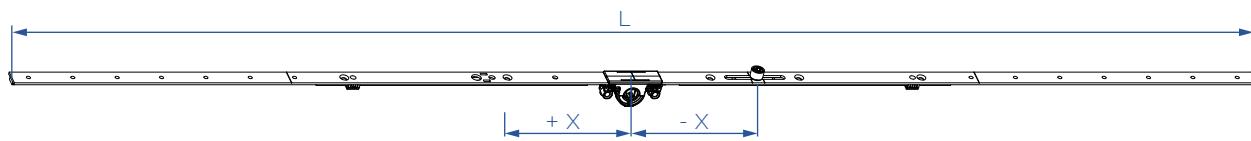

Backset 14,5 mm

SRH	HH	L	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	-111	.	1	2	10	1088473
900 - 1400	450 - 700	1120	-111	.	1	5	10	1098964
1401 - 1800	701 - 900	1520	- 111	.	1	7	10	1098965
1601 - 2000	801 - 1000	1720	- 311	+ 309	2	8	10	1098966
2001 - 2400	1001 - 1200	2120	- 311	+ 309	2	10	10	1098967

SRH	HH	L	X	X	X	X	PACK.	MATERIAL
900 - 1400	450 - 700	1120	.	-211	+ 209	.	2	6
1401 - 1800	701 - 900	1520	.	-211	+ 209	.	2	8
1601 - 2000	801 - 1000	1720	.	- 311	+ 109	+ 559	3	9
2001 - 2400	1001 - 1200	2120	-631	- 311	+ 309	+ 629	4	12


SRH	HH	L	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	-111	.	1	2	10	1101035
900 - 1400	450 - 700	1120	-111	.	1	5	10	1101036
1401 - 1800	701 - 900	1520	- 111	.	1	7	10	1101037
1601 - 2000	801 - 1000	1720	- 311	+ 309	2	8	10	1101038
2001 - 2400	1001 - 1200	2120	- 311	+ 309	2	10	10	1101039

SRH	HH	L	X	X	X	X	PACK.	MATERIAL
900 - 1400	450 - 700	1120	.	- 211	+ 209	.	2	6
1401 - 1800	701 - 900	1520	.	- 211	+ 209	.	2	8
1601 - 2000	801 - 1000	1720	.	- 311	+ 109	+ 559	3	9
2001 - 2400	1001 - 1200	2120	-631	- 311	+ 309	+ 629	4	12

* SRH 2401 - 2700 ADD EXTENSION 400 1102897

T&T ESPAGNOLETTE M - LARGER BACKSETS

Centered / variable handle height

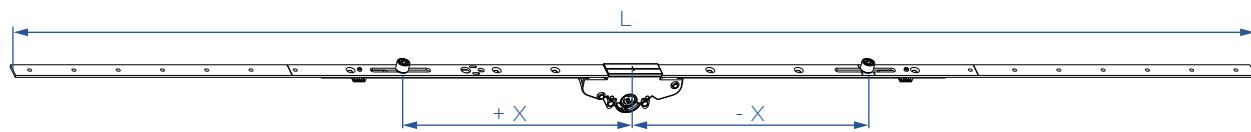

Backset 25 mm

SRH	HH	L	X	X	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	.	.	-111	.	1	2	6	1104485
900 - 1400	450 - 700	1120	.	+209	-211	.	2	6	6	1104486
1401 - 1800	701 - 900	1520	.	+209	-211	.	2	8	6	1104487
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	3	9	6	1104488
2001 - 2400	1001 - 1200	2120	+629	+309	-311	- 631	4	12	6	1104489

Backset 30 mm

SRH	HH	L	X	X	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	.	.	-111	.	1	2	6	1107648
900 - 1400	450 - 700	1120	.	+209	-211	.	2	6	6	1107649
1401 - 1800	701 - 900	1520	.	+209	-211	.	2	8	6	1107650
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	3	9	6	1107651
2001 - 2400	1001 - 1200	2120	+629	+309	-311	- 631	4	12	6	1107652

Backset 35 mm

SRH	HH	L	X	X	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	.	.	-111	.	1	2	6	1107654
900 - 1400	450 - 700	1120	.	+209	-211	.	2	6	6	1107655
1401 - 1800	701 - 900	1520	.	+209	-211	.	2	8	6	1107656
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	3	9	6	1107657
2001 - 2400	1001 - 1200	2120	+629	+309	-311	- 631	4	12	6	1107658


Backset 45 mm

SRH	HH	L	X	X	X	X			PACK.	MATERIAL
650 - 1000	300 - 500	720	.	.	-111	.	1	2	6	1104491
900 - 1400	450 - 700	1120	.	+209	-211	.	2	6	6	1104492
1401 - 1800	701 - 900	1520	.	+209	-211	.	2	8	6	1104493
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	3	9	6	1104494
2001 - 2400	1001 - 1200	2120	+629	+309	-311	- 631	4	12	6	1104495

* SRH 2401 - 2700 ADD EXTENSION 400 1102897

T&T ESPAGNOLETTE M - LARGER BACKSETS + LOCKABLE

Centered / variable handle height

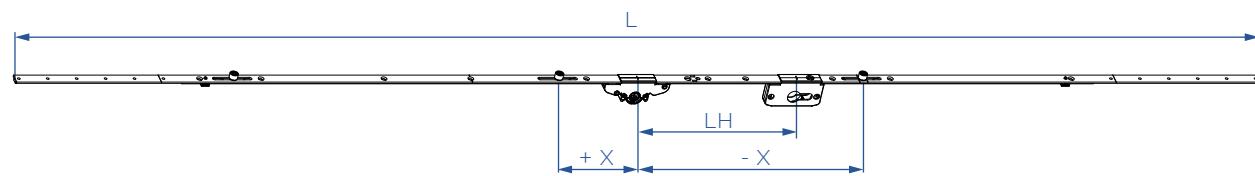

Backset 25 mm

SRH	HH	L	X	X	X	X	LH		PACK.	MATERIAL	
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	220	3	10	6	1104477
2001 - 2400	1001 - 1200	2120	+629	+ 309	-311	- 631	220	4	13	6	1104480

Backset 30 mm

SRH	HH	L	X	X	X	X	LH		PACK.	MATERIAL	
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	220	3	10	6	1107659
2001 - 2400	1001 - 1200	2120	+629	+ 309	-311	- 631	220	4	13	6	1107661

Backset 35 mm

SRH	HH	L	X	X	X	X	LH		PACK.	MATERIAL	
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	220	3	10	6	1107662
2001 - 2400	1001 - 1200	2120	+629	+ 309	-311	- 631	220	4	13	6	1107663


Backset 45 mm

SRH	HH	L	X	X	X	X	LH		PACK.	MATERIAL	
1601 - 2000	801 - 1000	1720	+559	+109	-311	.	220	3	10	6	1104482
2001 - 2400	1001 - 1200	2120	+629	+ 309	-311	- 631	220	4	13	6	1104483

* SRH 2401 - 2700 ADD EXTENSION 400 1102897

T&T ESPAGNOLETTE KV

Fixed handle height

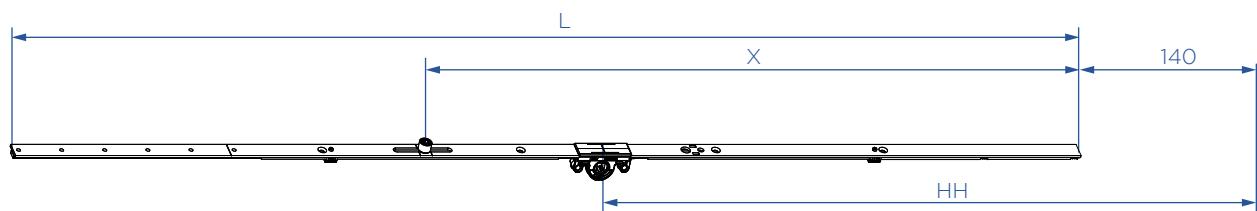

Backset 14,5 mm



SRH	HH	L	X	X			PACK.	MATERIAL
650 - 800	263	520	•	•	•	1	10	1115131
801 - 1000	413	720	•	•	•	3	10	1115132
801 - 1000	413	720	389	•	1	3	10	1115133
1001 - 1200	513	920	539	•	1	4	10	1115134
1201 - 1400	563	1120	539	•	1	6	10	1115135
1401 - 1600	563	1320	539	•	1	7	10	1115136
1601 - 1800	563	1520	539	•	1	8	10	1115137
1601 - 1800	1000	1520	539	•	1	8	10	1115167
1801 - 2000	1000	1720	1209	539	2	11	10	1115138
2001 - 2200	1000	1920	1209	539	2	12	10	1115139
2201 - 2400	1000	2120	1209	539	2	13	10	1115140

SRH	HH	L	X	X	MS		PACK.	MATERIAL	
801-1000	413	720	389	•	145	1	3	10	1142916
1001-1200	513	920	539	•	244	1	4	10	1142919
1201-1400	563	1120	539	•	244	1	6	10	1142921
1401-1600	563	1320	539	•	244	1	7	10	1142922
1601-1800	563	1520	539	•	244	1	8	10	1142923
1601-1800	1000	1520	539	•	244	1	8	10	1142924
1801-2000	1000	1720	1209	539	977	2	11	10	1142925
2001-2200	1000	1920	1209	539	977	2	12	10	1142926
2201-2400	1000	2120	1209	539	977	2	13	10	1142927

* SRH 2401 - 2700 ADD EXTENSION 400 1102897


CORNER DRIVE

TYPE	DESCRIPTION	CAM			PACK.	MATERIAL
1	Corner drive	1 R	1	4	10	1103158
2	Corner drive	1 RS	1	4	10	1100983
3	Corner drive	2 R	2	4	10	1103159
4	Corner drive	2 RS	2	4	10	1100984

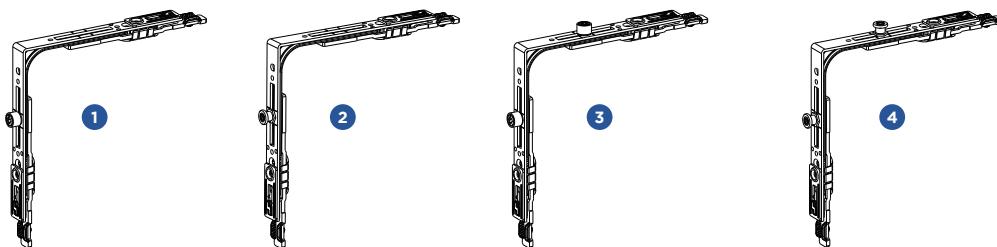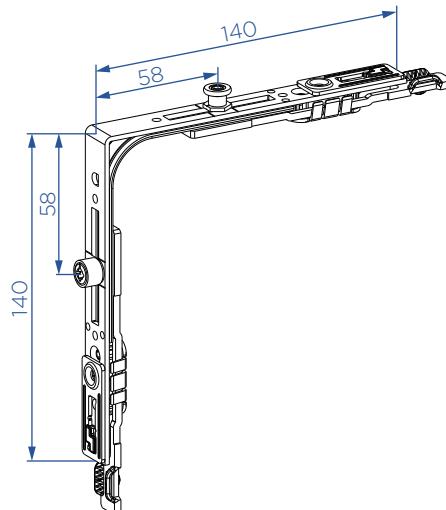

* HKS REQUIRES RS CAMS AT THE BOTTOM (TILT) - 2 PCS PER SASH
 * SP REQUIRES RS CAM IN EACH CORNER (VENTILATION) - 4 PCS PER SASH


ESPAGNOLETTE EXTENSION



DESCRIPTION	A	L	X			PACK.	MATERIAL
400	200	400	79	3	1	10	1102897
600	200	600	79	4	1	10	1102898
800	200	800	79	5	1	10	1102899

* SRH 2401 - 2700 ADD EXTENSION 400 1102897

CENTER LOCK

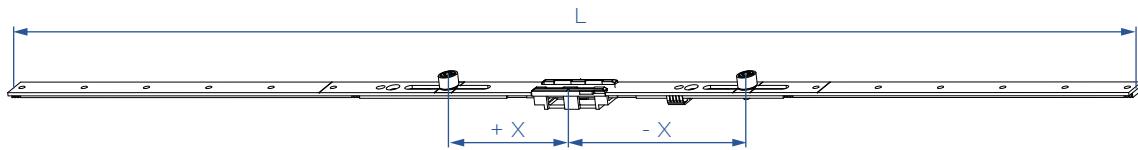

Vertical

								PACK.	MATERIAL
SRH	L	X	X						
650 - 1000	720	•	- 111	1	2	10	1095173		
1001 - 1400	1120	•	- 111	1	5	10	1095174		
1401 - 1800	1520	•	- 111	1	7	10	1095175		
1801 - 2000	1720	+ 309	- 311	2	8	10	1095176		
2001 - 2400	2120	+ 309	- 311	2	10	10	1095177		

								PACK.	MATERIAL
SRH	L	X	X						
650 - 1000	720	•	- 111	1	2	10	1143006		
1001 - 1400	1120	•	- 111	1	5	10	1143007		
1401 - 1800	1520	•	- 111	1	7	10	1143008		
1401 - 1800	1520	+ 309	- 311	2	7	10	1146736		
1801 - 2000	1720	+ 309	- 311	2	8	10	1143009		
2001 - 2400	2120	+ 309	- 311	2	10	10	1143010		

Horizontal


								PACK.	MATERIAL
SRW	L	X							
620 - 1000	720	- 111	1	2	10	1095173			
1001 - 1400	1120	- 111	1	5	10	1095174			
1401 - 1650	1520	- 111	1	7	10	1095175			

								PACK.	MATERIAL
SRH	L	X	X						
620 - 1000	720	•	- 111	1	2	10	1143006		
1001 - 1400	1120	•	- 111	1	5	10	1143007		
1401 - 1650	1520	•	- 111	1	7	10	1143008		
1401 - 1650	1520	+ 309	- 311	2	7	10	1146736		


* SRH 2401 - 2700 ADD EXTENSION 400 1102897



STRIKER	PACK.	MATERIAL
ALUPLAST 2000/ 3000/ 4000/ 5000/ 6000/ 8000	300	1083204
BRUGMANN BluEvolution	300	1083202
DECEUNINCK 2500/ 2800	300	1083206
EUROCELL Modus	300	1107664
GEALAN 7000/ 8000 /S9000	300	1083203
INOUTIC Prestige/ Arcade	300	1083206
INOUTIC Elegante	300	1131423
LINIAR	300	1097948
PIMAPEN Carisma S-7000	300	1131423
PROFINE KBE 76/ 70AD	300	1083205
PROFINE KÖMMERLING Eurofutur Clasic/ Elegance/ 88 Plus/ C70/ 76 MD	300	1083205
PROFINE TROCAL 70.A5 AD/ 70.M5 MD/ 76 AD/ 76 MD	300	1083205
REHAU Geneo/ Synego/ S706/ S730	300	1083204
ROLOPLAST 7000/ 7500/ 7500 3D	300	1083204
SALAMANDER 3D/ Streamline 76	300	1083204
SCHÜCO Corona AD/ CT70 AD/ CT70 MD/ S182 MD	300	1083204
SELECTA Advance 70	300	1083205
VEKA Matrix/ Softline/ Softline 82/ Topline	300	1083202
WEISS WP3000/ WP4000/ WP5000	300	1083204
WHS Halo System 10	300	1083204

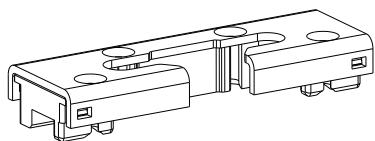


T&TI STRIKER	POS.	PACK.	MATERIAL
ALUPLAST 2000/ 3000	L	100	1132231
	R	100	1132232
ALUPLAST 4000/ 5000/ 6000/ 8000	L	100	1132233
	R	100	1132234
BRUGMANN BluEvolution	L	100	1132249
	R	100	1132250
DECEUNINCK 2500/ 2800	L	100	1132245
	R	100	1132246
EUROCELL Modus	L	100	1132235
	R	100	1132236
GEALAN 7000/ 8000 /S9000	L	100	1132235
	R	100	1132236
INOUTIC Prestige/ Arcade	L	100	1132245
	R	100	1132246
INOUTIC Elegante	L	100	1135570
	R	100	1135571
LINIAR	L	100	1132249
	R	100	1132250
PIMAPEN Carisma S-7000	L	100	1135570
	R	100	1135571
PROFINE KBE 76/ 70AD	L	100	1132235
	R	100	1132236
PROFINE KÖMMERLING Eurofutur Clasic/ Elegance/ 88 Plus	L	100	1132239
	R	100	1132240
PROFINE KÖMMERLING C70/ 76 MD	L	100	1132235
	R	100	1132236
PROFINE TROCAL 70.A5 AD/ 70.M5 MD/ 76 AD/ 76 MD	L	100	1132235
	R	100	1132236
REHAU S706/ S730	L	100	1132241
	R	100	1132242
REHAU Geneo/ Synego	L	100	1139277
	R	100	1139278
ROLOPLAST 7000/ 7500/ 7500 3D	L	100	1132243
	R	100	1132244
SALAMANDER 3D/ Streamline 76	L	100	1132243
	R	100	1132244
SCHÜCO Corona AD/ CT70 AD/ CT70 MD/ S182 MD	L	100	1132231
	R	100	1132232
SELECTA Advance 70	L	100	1132235
	R	100	1132236
VEKA Matrix/ Softline/ Softline 82/ Topline	L	100	1132249
	R	100	1132250
WEISS WP3000/ WP4000/ WP5000	L	100	1132231
	R	100	1132232
WHS Halo System 10	L	100	1132233
	R	100	1132234



SECURITY STRIKER	PACK.	MATERIAL
ALUPLAST 2000/ 3000	100	1083219
ALUPLAST 4000/ 5000/ 6000/ 8000	100	1083216
BRUGMANN BluEvolution	100	1083214
DECEUNINCK 2500/ 2800	100	1083218
EUROCELL Modus	100	1083217
GEALAN 7000/ 8000/ S9000	100	1083217
INOUTIC Prestige/ Arcade	100	1083218
INOUTIC Elegante	100	1135572
LINIAR	100	1083214
PIMAPEN Carisma S-7000	100	1135572
PROFINE KBE 76/ 70AD	100	1083217
PROFINE KÖMMERLING Eurofutur Clasic/ Elegance/ 88 Plus	100	1098310
PROFINE KÖMMERLING C70/ 76 MD	100	1083217
PROFINE TROCAL 70.A5 AD/ 70.M5 MD/ 76 AD/ 76 MD	100	1083217
REHAU S706/ S730	100	1089625
REHAU Geneo/ Synego	100	1139279
ROLOPLAST 7000/ 7500/ 7500 3D	100	1098609
SALAMANDER 3D/ Streamline 76	100	1098609
SCHÜCO Corona AD/ CT70 AD/ CT70 MD/ S182 MD	100	1083219
SELECTA Advance 70	100	1083217
VEKA Matrix/ Softline/ Softline 82/ Topline	100	1083214
WEISS WP3000/ WP4000/ WP5000	100	1083219
WHS Halo System 10	100	1083216


SP STRIKER - NIGHT VENT



SP STRIKER NV	POS.	PACK.	MATERIAL
ALUPLAST 2000/ 3000	L	4	1107131
	R	4	1107132
ALUPLAST 4000/ 5000/ 6000/ 8000	L	4	1116742
	R	4	1116755
GEALAN 7000/ 8000/ S9000	L	4	1103565
	R	4	1104209
INOUTIC PRESTIGE/ ARCADE	L	4	1107130
	R	4	1107129
PROFINE KBE 70AD	L	4	1103565
	R	4	1104209
PROFINE KBE 76AD	L	4	1116744
	R	4	1116746
PROFINE KÖMMERLING C70/ 76 MD	L	4	1116744
	R	4	1116746
PROFINE KÖMMERLING Eurofutur Clasic/ Elegance/ 88 Plus	L	4	1107126
	R	4	1107128
PROFINE TROCAL 70.A5 AD/ 70.M5 MD	L	4	1116745
	R	4	1116747
PROFINE TROCAL 76 AD/ 76 MD	L	4	1116744
	R	4	1116746
REHAU GENEON/ SYNEGO	L	4	1116738
	R	4	1116753
REHAU S706/ S730	L	4	1107601
	R	4	1107609
SALAMANDER 3D/ STREAMLINE 76	L	4	1116738
	R	4	1116753
SCHÜCO CORONA AD/ CT70 AD/ CT70 MD/ S182 MD	L	4	1107131
	R	4	1107132
VEKA Softline/ Softline 82/ Topline	L	4	1107133
	R	4	1107134

SET OF RAILS

Tilt & Slide - HKS

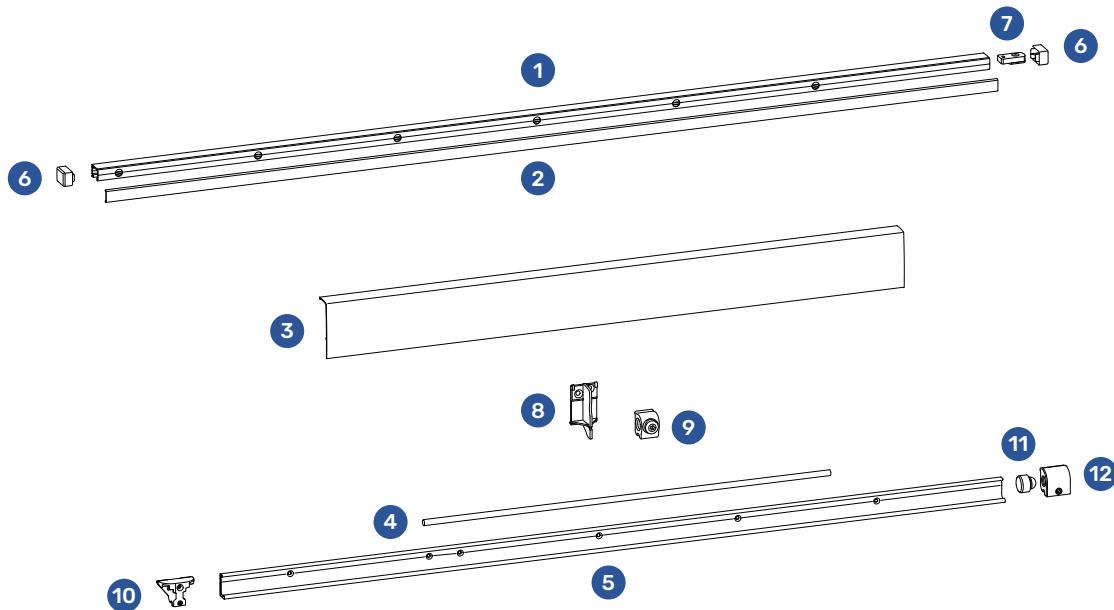


SRW	L	COLOR	MATERIAL	TYPE	DESCRIPTION	PACK
620 - 900	1930	WHITE SILVER BROWN MIDDLE BRONZE	1092851 1092850 1092852 1105246	1	GUIDE TRACK	1
901 - 1050	2230	WHITE SILVER BROWN MIDDLE BRONZE	1092855 1092854 1092856 1105249	2	SCREW COVER PROFILE	1
1051 - 1250	2630	WHITE SILVER BROWN MIDDLE BRONZE	1092859 1092858 1092860 1105267	3	COVER PROFILE	1
1251 - 1450*	3030	WHITE SILVER BROWN MIDDLE BRONZE	1092863 1092862 1092864 1105268	4	CONNECTING ROD	1
1451 - 1650 ¹⁾	3430	WHITE SILVER BROWN MIDDLE BRONZE	1092867 1092866 1092868 1105269	5	BOTTOM TRACK	1
				6	COVER CAP FOR GUIDE TRACK	2 (L&R)
				7	BUFFER - TOP	1
				8	COVER FILLET SUPPORT	1
				9	SUPPORT BLOCK	1
				10	GUIDE BLOCK	1
				11	RUBBER MUSHROOM PART	1
				12	BUFFER - BOTTOM	1

¹⁾ SRW = 1251 - 1650 mm & SRH = 2350 - 2700 mm, MUST USE HKS 160 kg SET

SET OF RAILS

Retract & Slide - SP

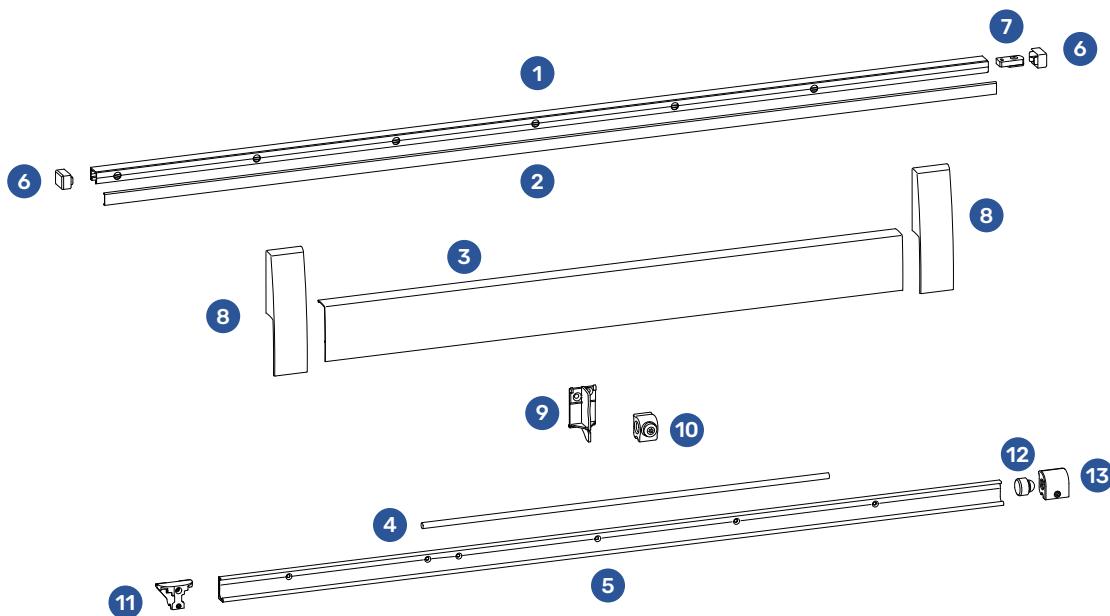


SRW	L	COLOR	MATERIAL	TYPE	DESCRIPTION	PACK
750 - 900	1930	WHITE	1094242	1	GUIDE TRACK	1
		MIDDLE BRONZE	1094244	2	SCREW COVER PROFILE	1
		CREAM WHITE	1094245	3	COVER PROFILE	1
		BROWN	1094243	4	CONNECTING ROD	1
		SILVER	1094208	5	BOTTOM TRACK	1
901 - 1050	2230	WHITE	1094018	6	COVER CAP FOR GUIDE TRACK	2 (L&R)
		MIDDLE BRONZE	1094248	7	BUFFER - TOP	1
		CREAM WHITE	1094249	8	COVER CAP - BOTTOM	2 (L&R)
		BROWN	1094247	9	COVER FILLET SUPPORT	1
		SILVER	1094246	10	SUPPORT BLOCK	1
1051 - 1250	2630	WHITE	1094281	11	GUIDE BLOCK	1
		MIDDLE BRONZE	1094284	12	RUBBER MUSHROOM PART	1
		CREAM WHITE	1094285	13	BUFFER - BOTTOM	1
		BROWN	1094283			
		SILVER	1094250			
1251 - 1450 ¹⁾	3030	WHITE	1094287			
		MIDDLE BRONZE	1094289			
		CREAM WHITE	1094290			
		BROWN	1094288			
		SILVER	1094286			
1451 - 1650 ¹⁾	3430	WHITE	1094302			
		MIDDLE BRONZE	1094304			
		CREAM WHITE	1094305			
		BROWN	1094303			
		SILVER	1094301			
1651 - 2000 ¹⁾	4130	WHITE	1107136			
		MIDDLE BRONZE	1111198			
		CREAM WHITE	1111197			
		BROWN	1109746			
		SILVER	1107135			

¹⁾ SRW = 1250 - 2000 mm & SRH = 2350 - 2700 mm, MUST USE TWIN BOGIES 200 kg

STAY SYSTEM

Tilt & Slide - HKS

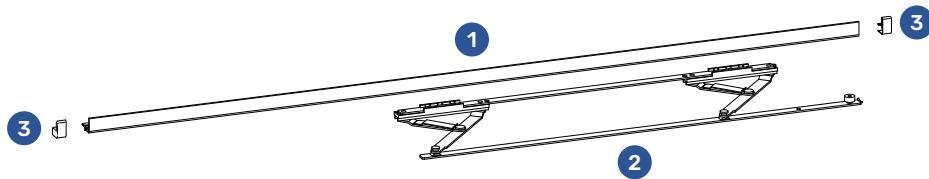


SRW	L	COLOR	MATERIAL	TYPE	DESCRIPTION	PACK
620 - 900	900	WHITE SILVER BROWN MIDDLE BRONZE	1092875 1092874 1092876 1105271	1 2 3	STAY CONNECTING PROFILE STAY ARM COVER CAP FOR STAY CON. PROFILE	1 1 2 (L&R)
901 - 1250	1250	WHITE SILVER BROWN MIDDLE BRONZE	1092879 1092878 1092880 1105272			
1251 - 1650 ¹⁾	1650	WHITE SILVER BROWN MIDDLE BRONZE	1092883 1092882 1092884 1105273			

¹⁾ SRW = 1251 - 1650 mm & SRH = 2350 - 2700 mm, MUST USE HKS 160 kg SET

STAY SYSTEM

Retract & Slide - SP

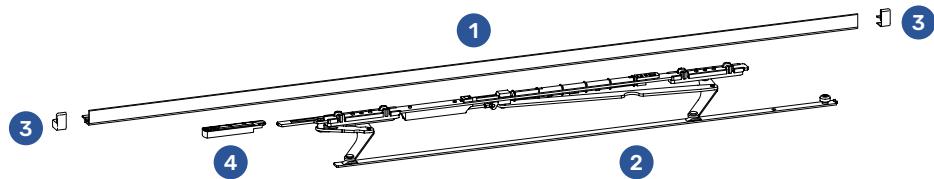


SRW	L	COLOR	POS	MATERIAL	TYPE	DESCRIPTION	PACK
750 - 900	900	WHITE	R	1094323	1	STAY CONNECTING PROFILE	1
			L	1094307	2	STAY ARM	1
			R	1094325	3	COVER CAP FOR STAY CON. PROFILE	2 (L&R)
			L	1094309	4	GUIDE BLOCK	
		MIDDLE BRONZE	R	1094326			
			L	1094312			
			R	1094324			
		CREAM WHITE	L	1094308			
			R	1094322			
		SILVER	L	1094306			
901 - 1250	1250	WHITE	R	1094299			
			L	1094019			
			R	1094341			
			L	1094315			
		MIDDLE BRONZE	R	1094342			
			L	1094316			
			R	1094300			
		CREAM WHITE	L	1094314			
			R	1094298			
		SILVER	L	1094313			
1251 - 1650 ¹⁾	1650	WHITE	R	1094344			
			L	1094318			
			R	1094347			
			L	1094320			
		MIDDLE BRONZE	R	1094348			
			L	1094321			
			R	1094345			
		CREAM WHITE	L	1094319			
			R	1094343			
		SILVER	L	1094317			
1651 - 2000 ¹⁾	2000	WHITE	R	1116729			
			L	1116725			
			R	1116731			
			L	1116727			
		MIDDLE BRONZE	R	1116730			
			L	1116726			
			R	1116728			
		BROWN	L	1116724			
		SILVER	R				
			L				

¹⁾ SRW = 1250 - 2000 mm & SRH = 2350 - 2700 mm, MUST USE TWIN BOGIES 200 kg

SET OF BOGIES

Tilt & Slide - HKS

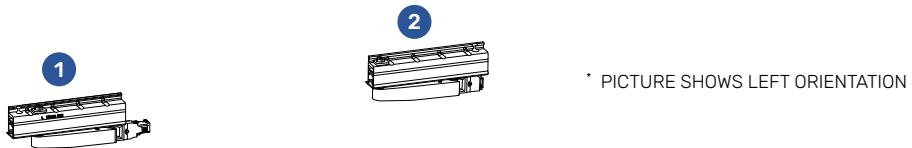


DESCRIPTION	POS	MATERIAL	TYPE	DESCRIPTION	PACK
BOGIES SET 100 KG	R	1083332	1	MASTER BOGIE	1
	L	1083331	2	SLAVE BOGIE	1

* SRW = 1251 - 1650 mm & SRH = 2350 - 2700 mm, MUST USE HKS 160 kg SET

* BOGIES COME IN SET OF 1x MASTER & 1x SLAVE BOGIE

Retract & Slide - SP

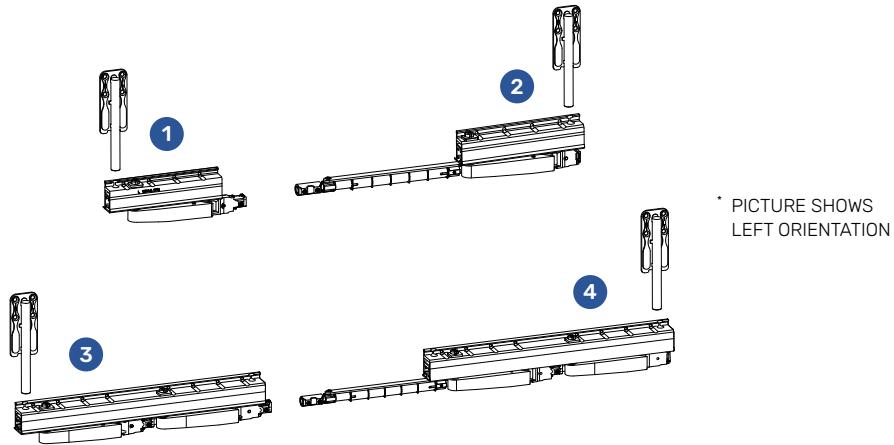


DESCRIPTION	POS	MATERIAL	TYPE	DESCRIPTION	PACK
BOGIES SET 160 KG WITH SUPPORT ARM	R	1094207	1	MASTER 160 BOGIE & SUP. ARM	1
	L	1094017	2	SLAVE 160 BOGIE & SUP. ARM	1
BOGIES TWIN SET 200 KG WITH SUPPORT ARM ¹⁾	R	1108769	3	MASTER 200 BOGIE & SUP. ARM	1
	L	1108770	4	SLAVE 200 BOGIE & SUP. ARM	1

¹⁾ SRW = 1250 - 2000 mm & SRH = 2350 - 2700 mm, MUST USE TWIN BOGIES 200 kg

* BOGIES COME IN SET OF 1x MASTER, 1x SLAVE BOGIE & 2x SUPPORT ARM

HKS 160 SET

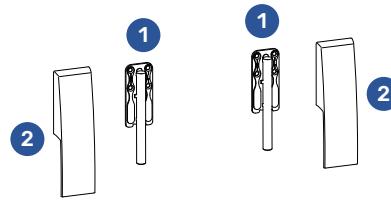

DESCRIPTION	COLOR	MATERIAL	TYPE	DESCRIPTION	PACK
SET 160 KG (COVER CAP + SUPPORT ARM)	WHITE	1092887	1	SUPPORT ARM	2 (L&R)
	SILVER	1092886	2	COVER CAP - BOTTOM	2 (L&R)
	BROWN	1092888			
	MIDDLE BRONZE	1105274			

* SRW = 1251 - 1650 mm & SRH = 2350 - 2700 mm, MUST USE HKS 160 kg SET

* HKS 160 SET COMES IN SET OF L and R SUPPORT ARM & L and R SUPPORT ARM COVER CAP

COVER CAPS HKS 100




DESCRIPTION	COLOR	MATERIAL	TYPE	DESCRIPTION	PACK
COVER CAP 100 KG - BOTTOM	WHITE	1092897	1	COVER CAP 100 KG - BOTTOM	2 (L&R)
	SILVER	1092896			
	BROWN	1092898			
	MIDDLE BRONZE	1105277			


* WHEN USING HKS 160 SET, COVER CAPS HKS 100 ARE NOT NEEDED

* COVER CAPS COME IN SET OF L and R COVER CAP


Window handles

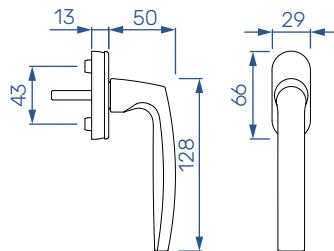


1

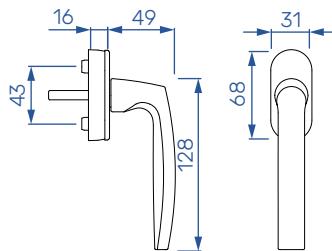

2

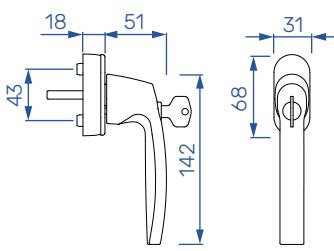


3

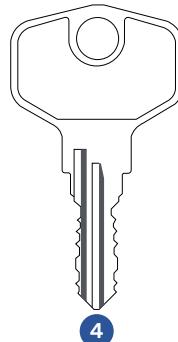

4

TYPE	DESCRIPTION	L	COLOR	PACK	MATERIAL
1	STANDARD HANDLE	32	F4 - dark bronze	20	1053207
		37	F1 - silver	20	1053212
		37	F4 - dark bronze	20	1053213
		37	F9 - titan	20	1053214
		37	RAL 9010 - white	20	1053215
		37	RAL 8707 - brown	20	1053216
		42	F1 - silver	20	1100839
2	SECUSTIC HANDLE	42	RAL 9010 - white	20	1058068
		42	RAL 8707 - brown	20	1058069
		37	F1 - silver	10	1053222
		37	F4 - dark bronze	10	1053223
		37	F9 - titan	10	1053224
3	SECUSTIC HANDLE WITH SAFETY LOCK	37	RAL 9010 - white	10	1053225
		37	RAL 8707 - brown	10	1053226
		37	F1 - silver	10	1053232
		37	F4 - dark bronze	10	1053235
		37	F9 - titan	10	1053236
4	SPARE KEY FOR HANDLE	37	RAL 9010 - white	10	1053237
		37	RAL 8707 - brown	10	1053238
4		/	/	1	1119964


Slide handles

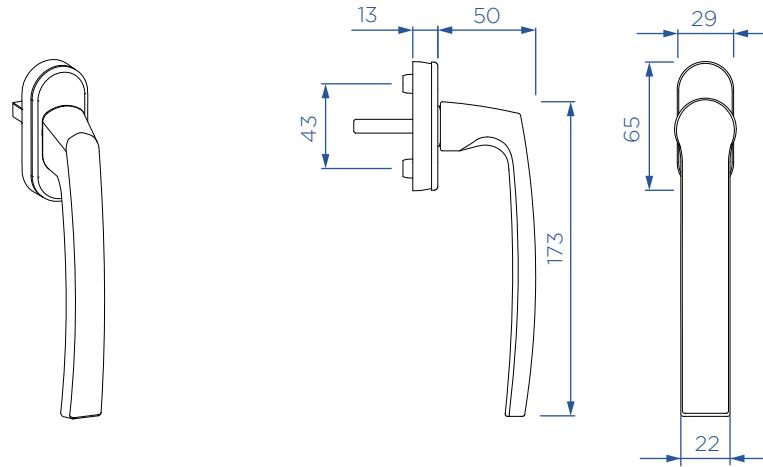

DESCRIPTION	L	COLOR	PACK	MATERIAL
SLIDE HANDLE	35	F9010 - white	60	1066771
	35	F8707 - dark brown	60	1066773
	42	F9010 - white	60	1107644
	42	F1 - silver	60	1123358


SCREWS FOR FIXING HARDWARE COMPONENTS

TYPE	DESCRIPTION	SIZE	MATERIAL
1	SCREW	4,2 x 25 mm	1134209
2	SCREW	4,2 x 35 mm	1134210




LOCKING CAM ADJUSTMENT INSTRUCTIONS

Rolling cam - R

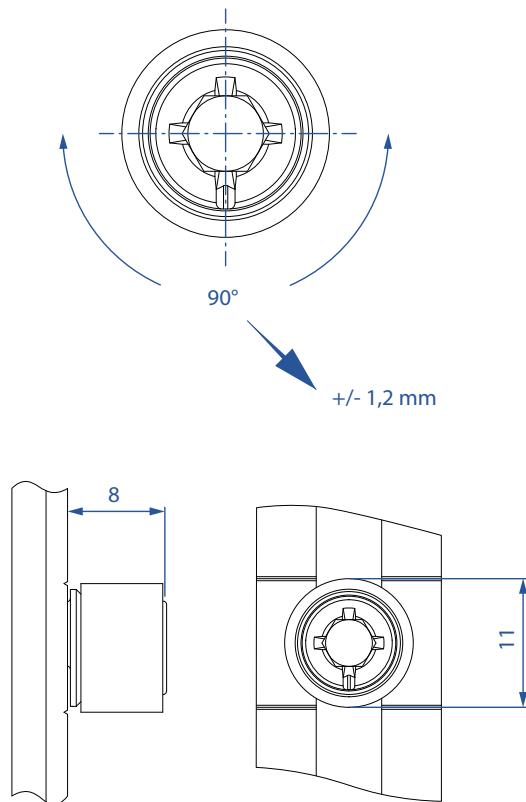


R CAM ADJUSTMENT TOOL

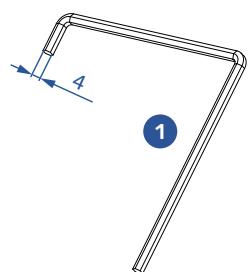


TYPE	DESCRIPTION	SIZE	MATERIAL
1	HEX KEY	4 mm	1095750

LOCKING CAM ADJUSTMENT INSTRUCTIONS

Rolling security cam - RS

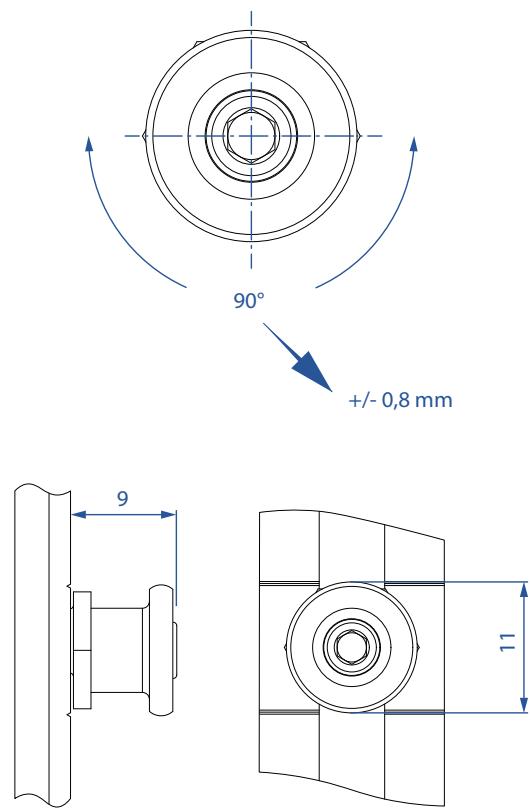

RS CAM ADJUSTMENT TOOL

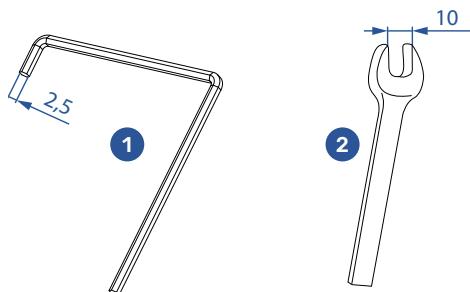


TYPE	DESCRIPTION	SIZE	MATERIAL
1	HEX KEY	2,5 mm	1148205
2	SPANNER	10 mm	/



STRIKER JIGS INSTALLATION INSTRUCTIONS


Types

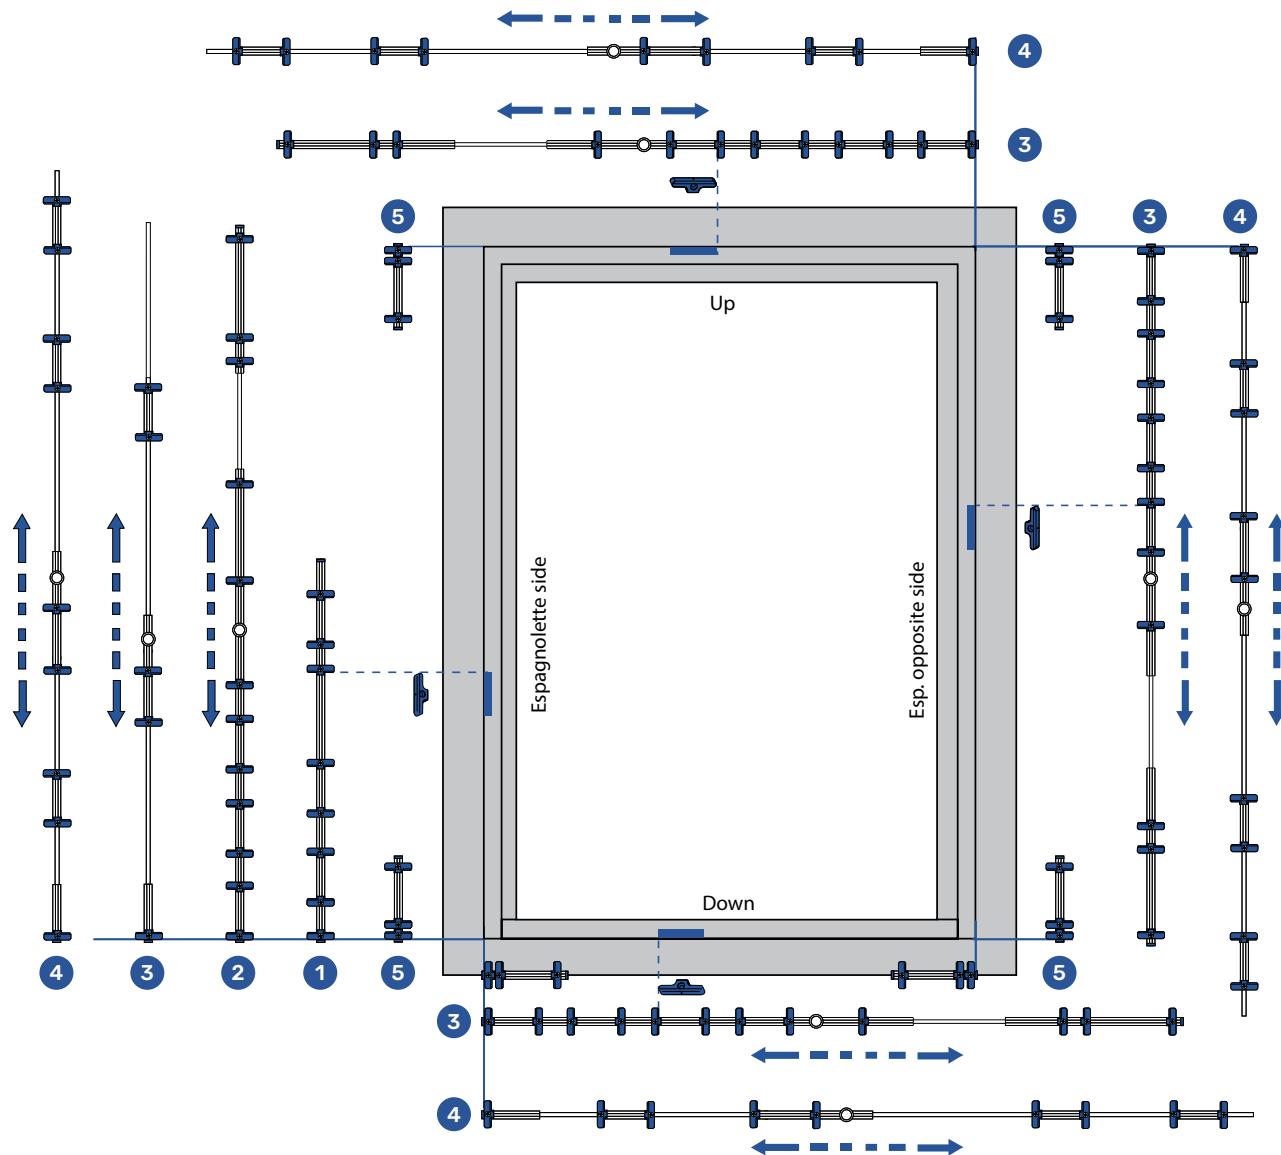

TYPE	DESCRIPTION	NOTE	MATERIAL
1	Constant handle height espagnolette	SRH < 1600	1103566
2	Constant handle height espagnolette - telescopic jig	SRH > 1601	1103570
3	Centered handle height espagnolette - telescopic jig	SRH < 1600	1103572
3a	TYPE 3 - with additional cam	SRH < 1600	1103573
4	Centered handle height espagnolette - telescopic jig	SRH > 1601	1103574
4a	TYPE 4 - with additional cam	SRH > 1601	1103575
5	SP striker jig	/	1108013
6	TILT striker JIG	/	1108014

STRIKER JIGS INSTALLATION INSTRUCTIONS

Instructions for use

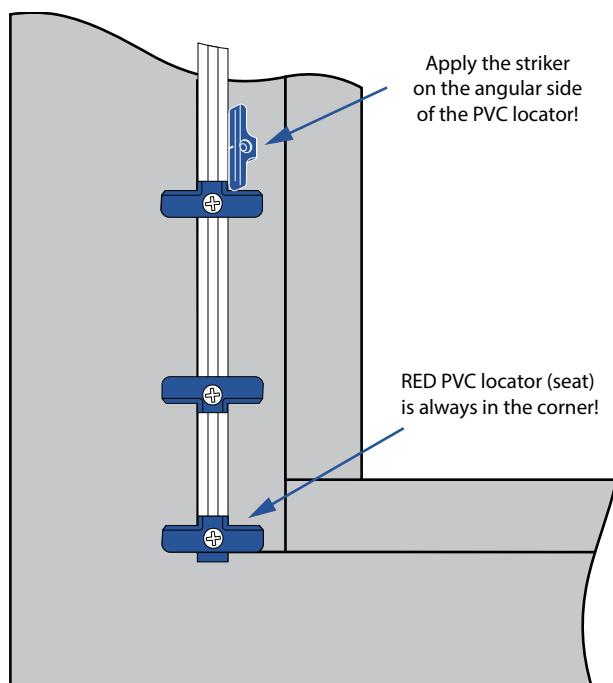


CAM scheme



COLOR of PVC LOCATOR	DESCRIPTION	NOTES
RED	Seat - NO locking cam	No striker
YELLOW	Corner drive locking cam	Located next to the seat
YELLOW	Espagnolette & center lock locking cam	/
GREEN	N / A	/
BLUE	N / A	/
BROWN	N / A	/

TOP & BOTTOM RAIL JIG - HKS & SP

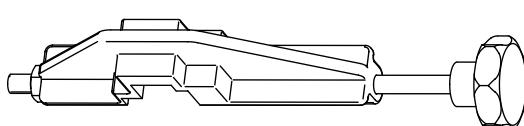


DESCRIPTION	PACK	MATERIAL
HKS & SP TOP AND BOTTOM RAIL JIG	1	1105239




Window-handle drilling

GEAR-CASE SPROCKET AND LUGS' DRILL HOLE

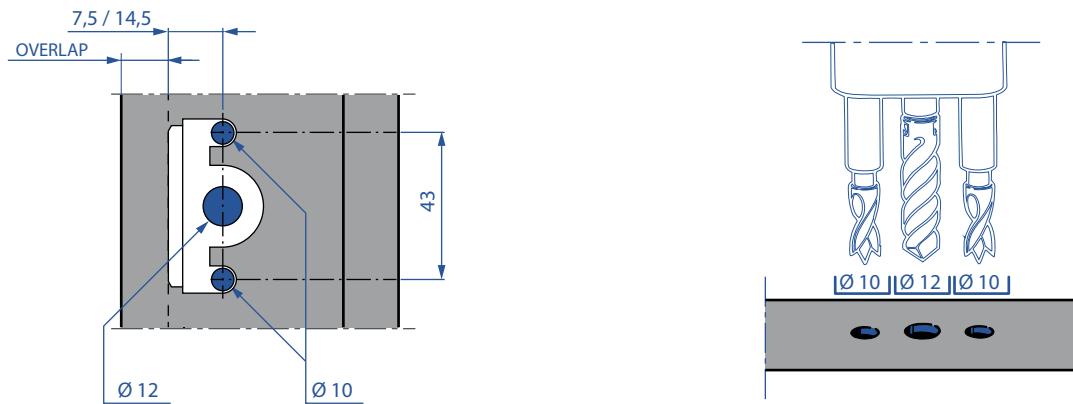

Gear-case routing

ESPAGNOLETTE GEAR-CASING

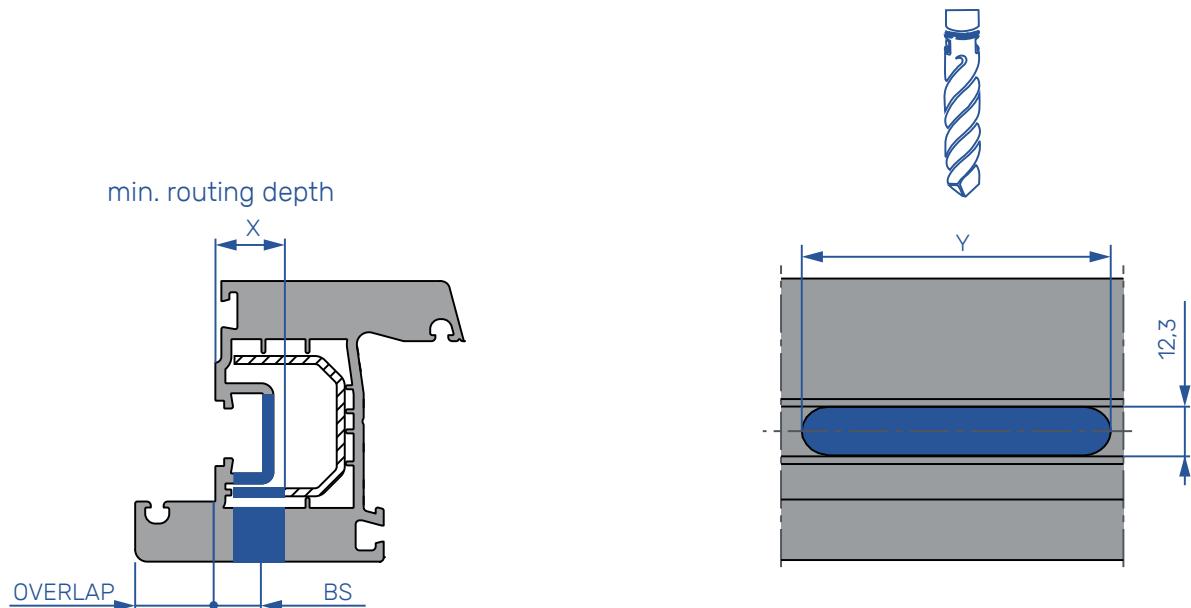


BS	X
7,5	20
14,5	27

BS	Y
7,5	34
14,5	64

Lock-case drilling


ESPAGNOLETTE LOCK-CASING

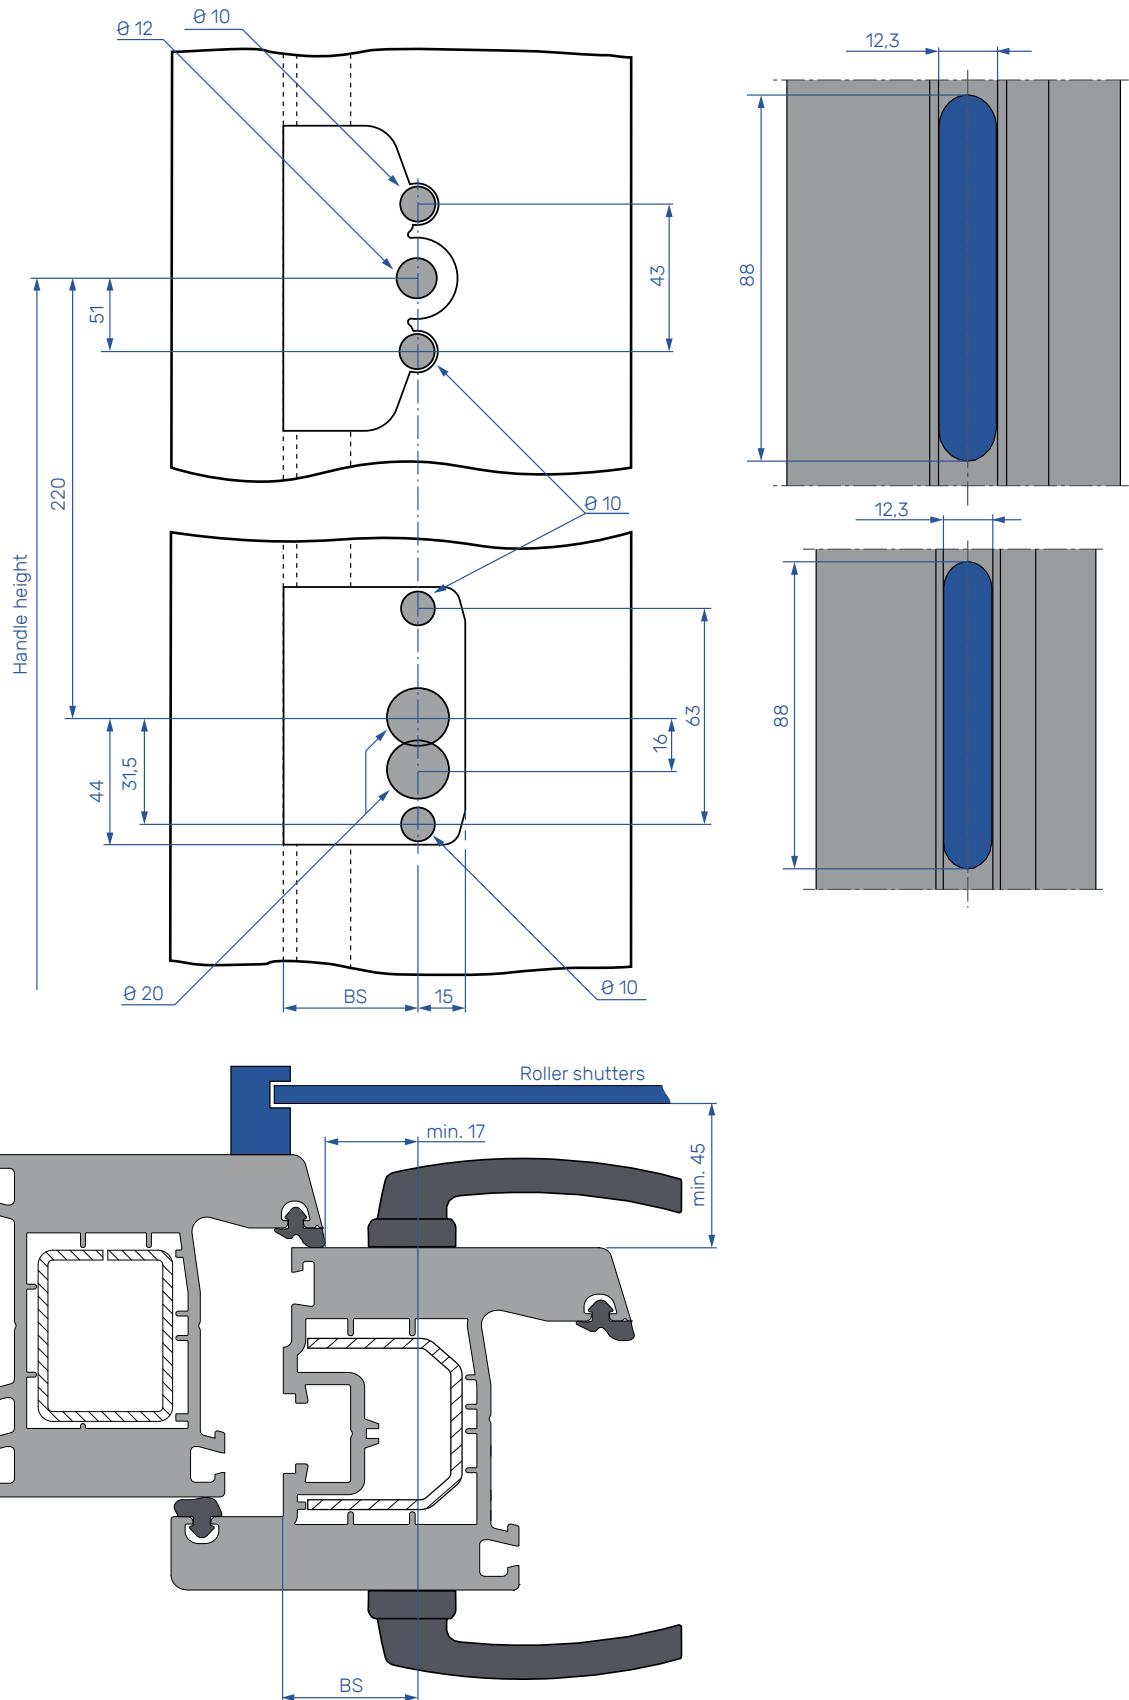

BS = 25, 30, 35 and 45 mm

SASH HARDWARE INSTALLATION INSTRUCTIONS


Tilt & Slide - HKS

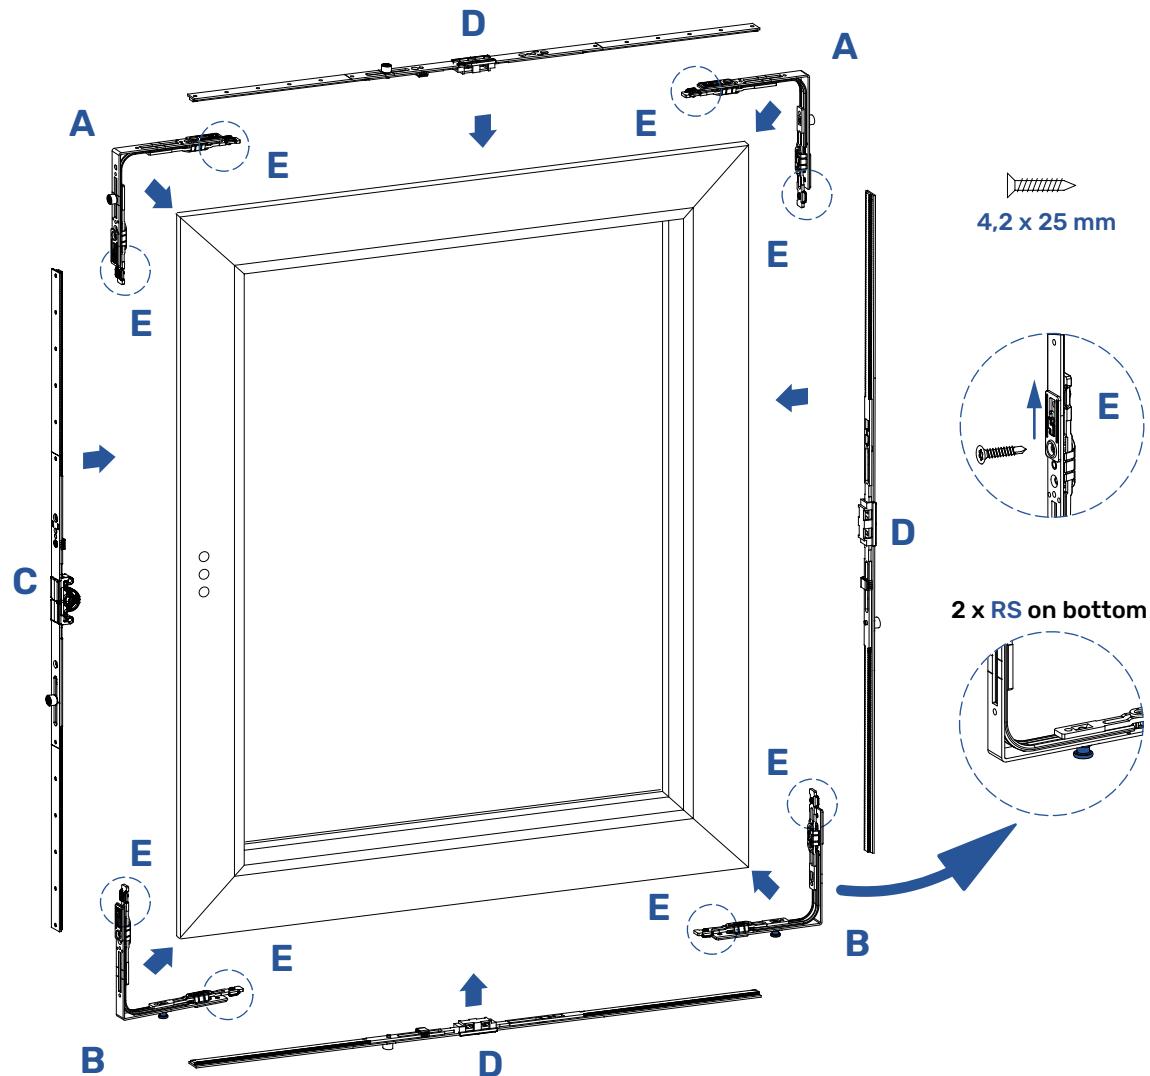

- 1 Install 2 corner drives on top (A) and 2 corner drives on bottom (B) with RS cam. Bottom corner drives must have at least one RS cam each, for tilt.
- 2 Shorten the espagnolette (C) and central locks (D) according to the rebate dimensions of the sash.
- 3 Install the shortened espagnolette (C) and center locks (D).
- 4 Move the sliders (E) on corner drives, to lock the hardware in place.
- 5 Fix the hardware to the sash with 4,2 x 25 mm screws.

SASH HARDWARE INSTALLATION INSTRUCTIONS



Retract & Slide - SP

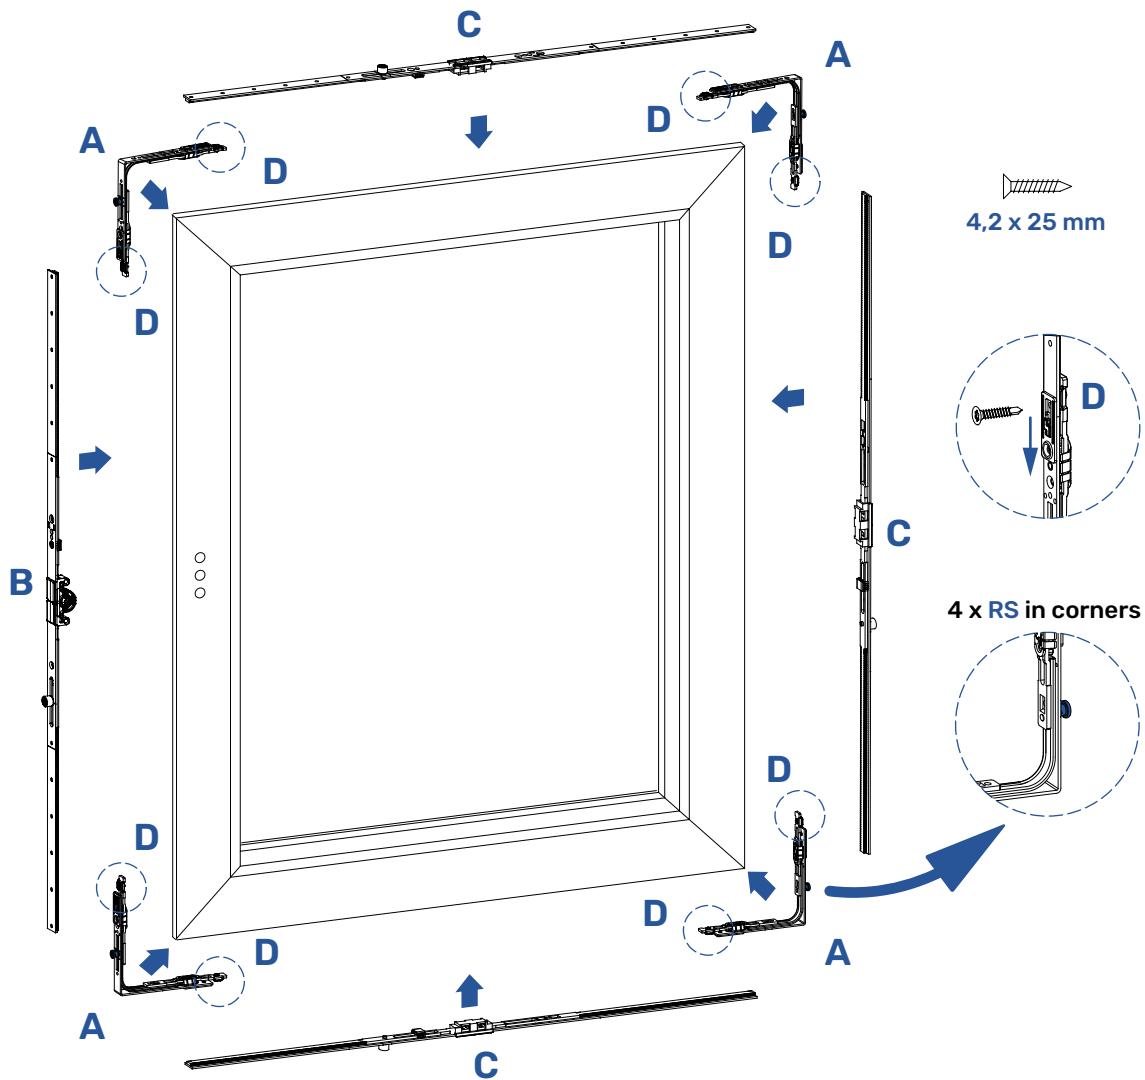

- 1 Install 4 corner drives with RS cams (A) in sash's corners. All 4 corner drives must have at least one RS cam each, for ventilation.
- 2 Shorten the espagnolette (B) and central locks (C) according to the rebate dimensions of the sash.
- 3 Install the shortened espagnolette (B) and center locks (C).
- 4 Move the sliders (D) on corner drives, to lock the hardware in place.
- 5 Fix the hardware to the sash with 4,2 x 25 mm screws.

FRAME HARDWARE INSTALLATION INSTRUCTIONS

Mounting of bogies

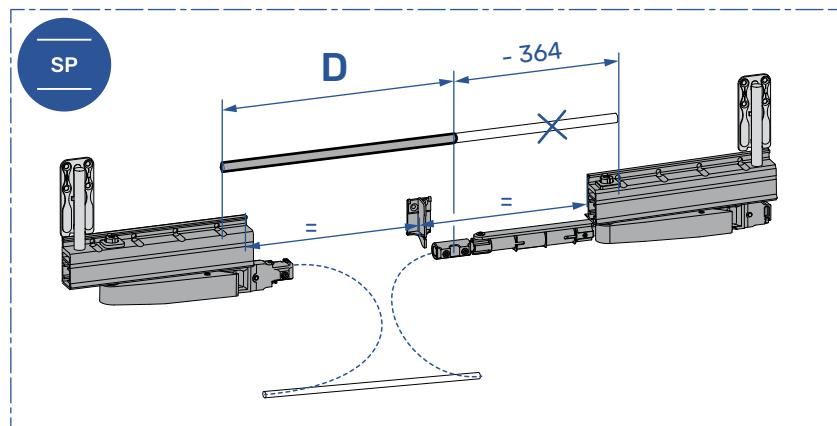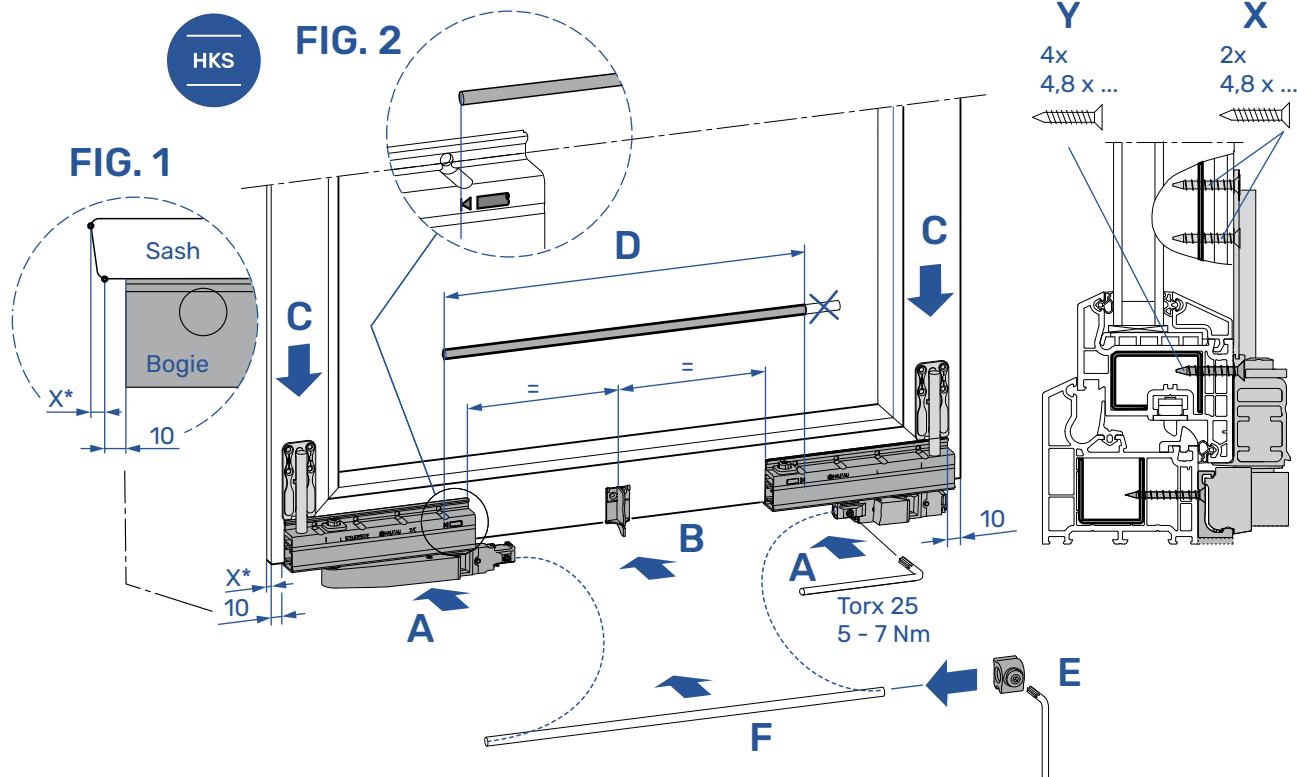



WARNING!

The power storage unit is under pressure. Never open or bend it or apply any other type of force. Otherwise, the result could be bodily injuries from suddenly ejected parts.

- 1** Install and fix the bogies (A) with screws. Ensure the flush position by keeping the 10 mm distance from the outer sash edges (FIG. 1).
- 2** Fix cover fillet support (B) in the middle of bogies. For SRW > 1450 mm, install 2 fillet supports equally between bogies.
- 3** For HKS 160 insert the support arms (C) and fix it with screws.
- 4** Cut the connecting track (D) to size according to the marks on bogies (FIG. 2).
- 5** For SRW > 1450 mm move the support block (E) into the middle of the connecting rod (D) and tighten the Torx screw.
- 6** Install connecting rod in bogies (F) and tighten the Torx screws.

FRAME HARDWARE INSTALLATION INSTRUCTIONS

Parallel alignment of bogies

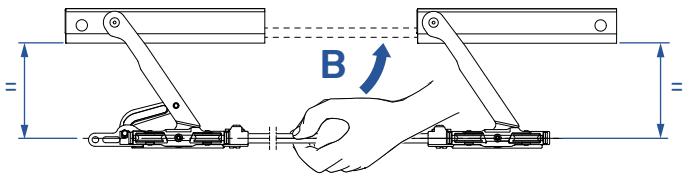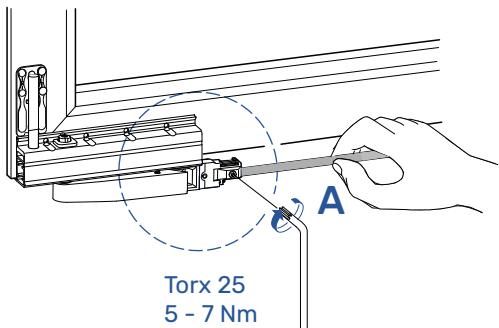

- 1** Grab the connecting rod (A) and bring it into position "close" (B).
- 2** Tighten the connecting rod at the master bogie.
- 3** Now, both bogies should be in parallel position. Tighten also the slave bogie.

FRAME HARDWARE INSTALLATION INSTRUCTIONS

Mounting of guide & bottom track and stay system


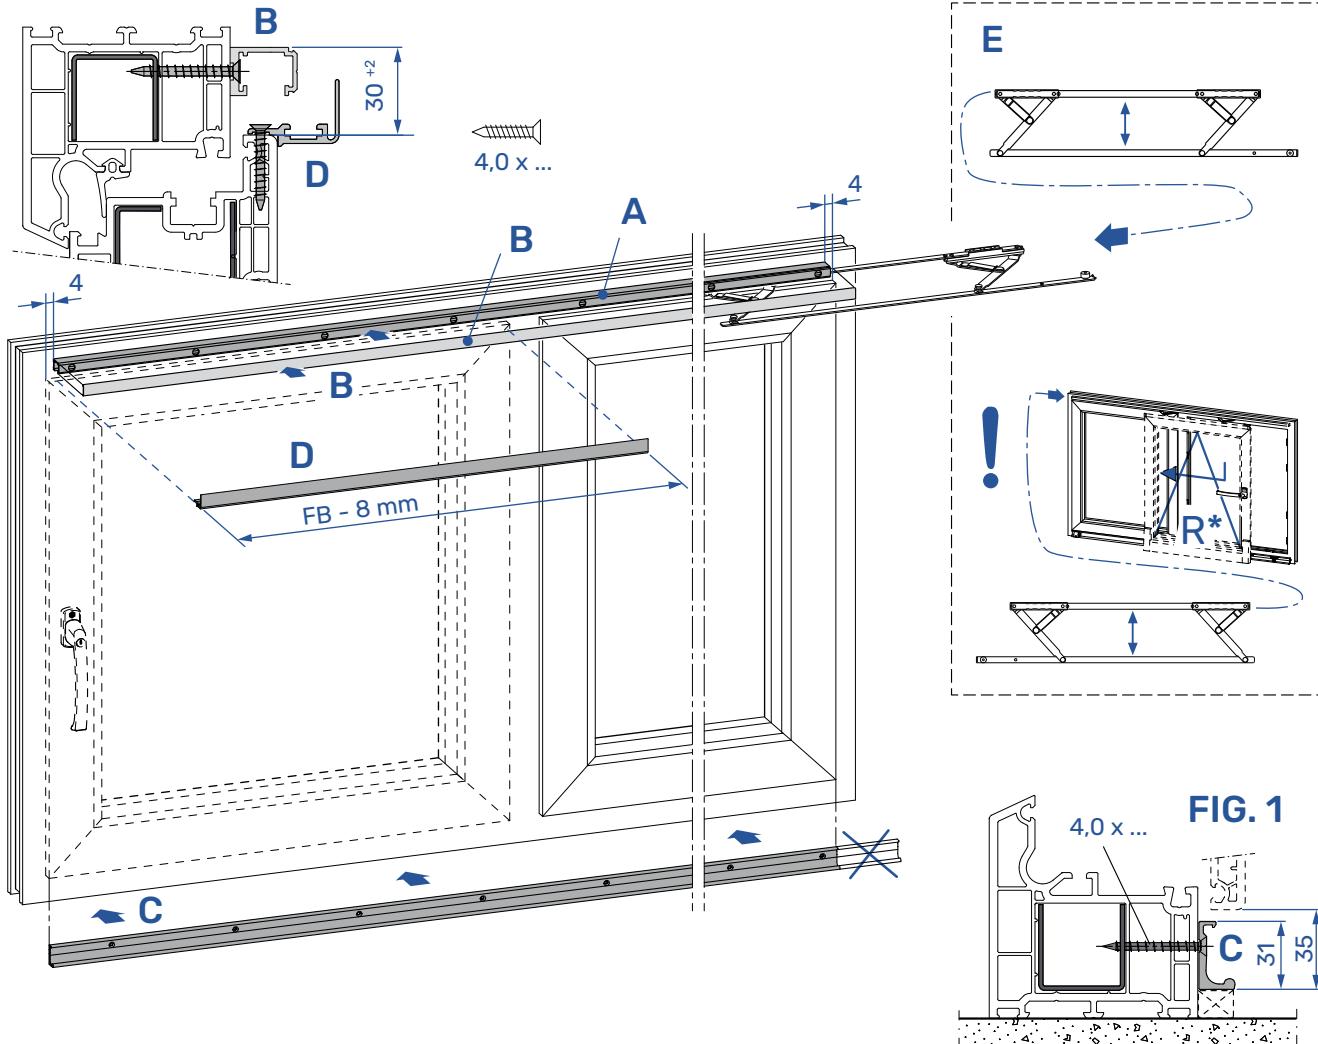



FIG. 1

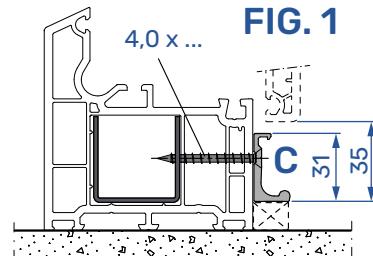

- 1 Cut the guide track (A) to the correct dimension - distance between outer edges of sliding and fixed sash, minus 8 mm. For correct position, use the montage jig 1105239. Fix the guide track (A) with **flathead** screws.
- 2 Shorten the cover profile (B) according to the size of the guide track (A) and clip it on the guide track (A).
- 3 Cut the bottom track (C) to the correct dimension - distance between outer edges of sliding and fixed sash. For correct position, use the montage jig 1105239. Fix the bottom track (C) with **flathead** screws.
- 4 Cut the stay connecting profile (D) to the width of outer edge of sliding sash minus 8 mm. Fix it on the top of the sash in the middle, with screws.
- 5 Open the stay system (E) and push it into the guide track (A).

FRAME HARDWARE INSTALLATION INSTRUCTIONS


Hanging sash

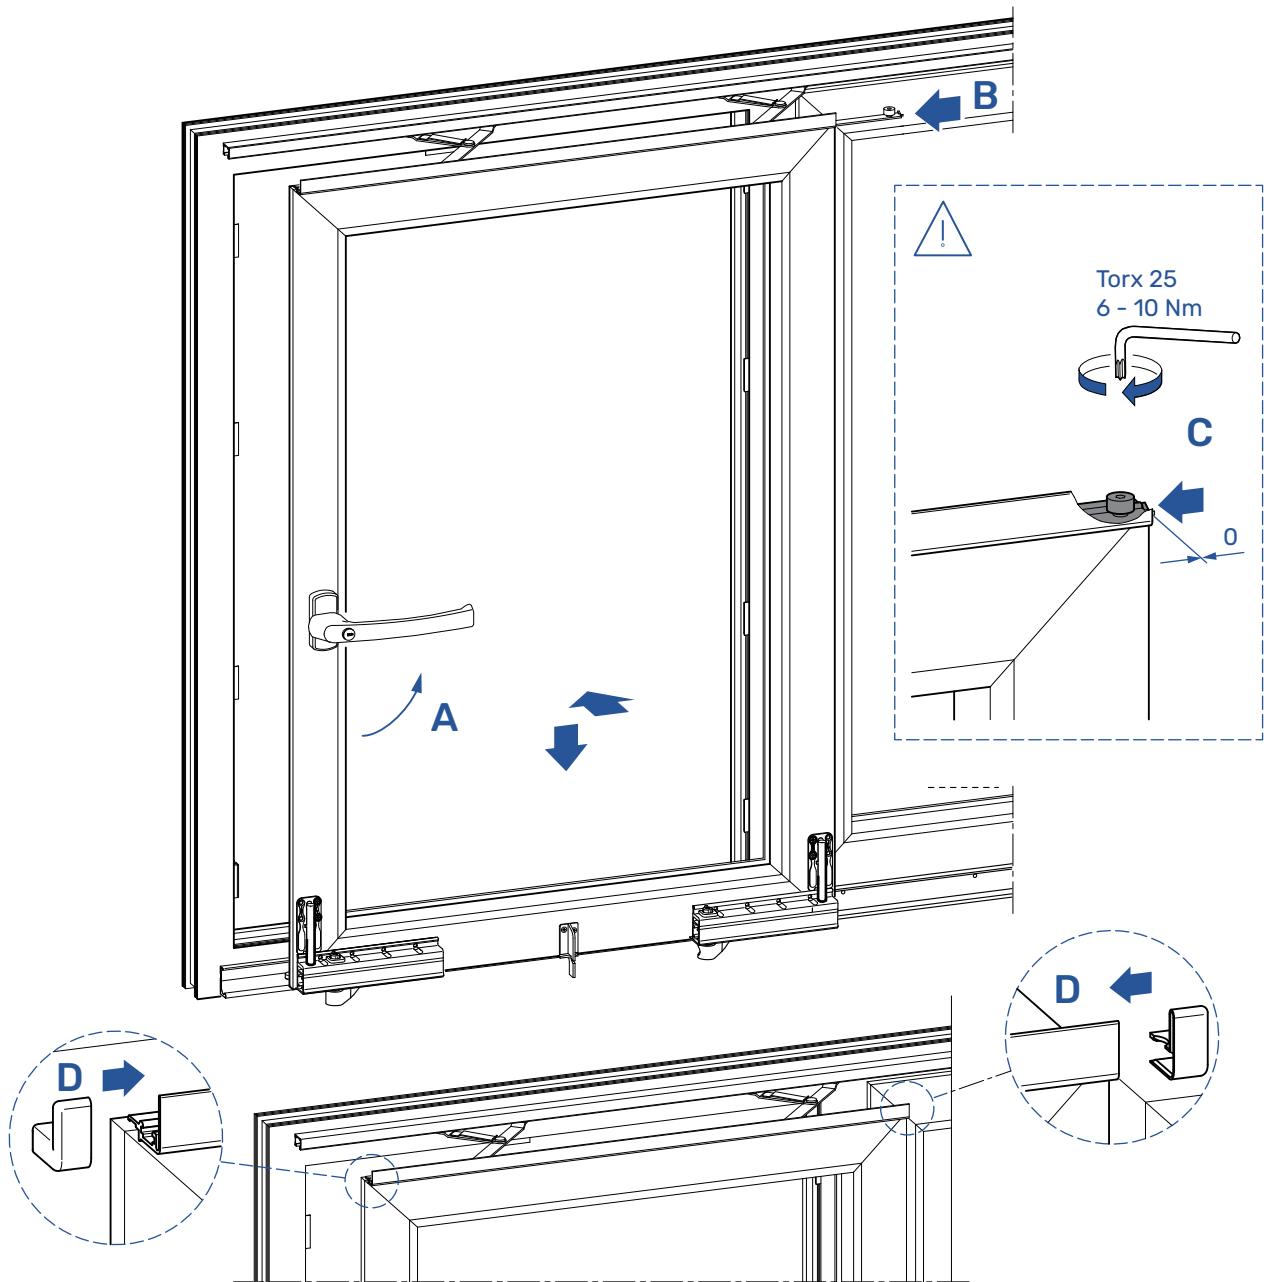

- 1** Bring handle into slide position (A). Lift the sash slightly in oblique position and place it together with bogie rollers on front edge of bottom track.
- 2** Push stay system (B) into stay connecting profile. Align the stay system into flush position (C) with the connecting profile. After that, tighten the screw. The screw must be positive fitted into the hole of the stay connecting profile!
- 3** Attach cover caps (D) on ends of stay connecting profile.

FRAME HARDWARE INSTALLATION INSTRUCTIONS


Installation of guide block and sash alignment

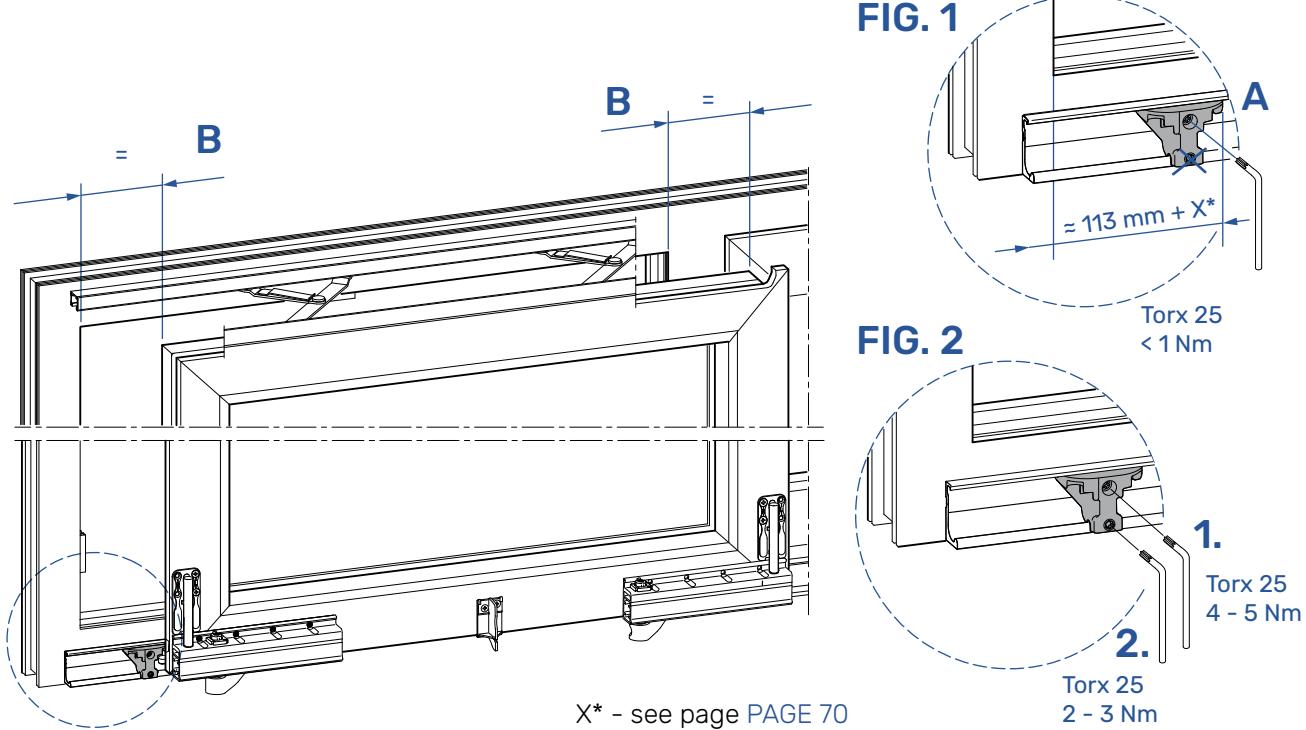

- 1 Set guide block (A) on handle side at a distance of approx. 113 mm + X* from the inner edge of the frame (FIG.1). Tighten the guide block slightly using the upper screw.
- 2 Put the sash into tilt position and check fittings cavity (B) on both sides (12 mm). Reset guide block, if necessary.
- 3 Tight the screws on the guide block (FIG.2).

FRAME HARDWARE INSTALLATION INSTRUCTIONS


Sash alignment

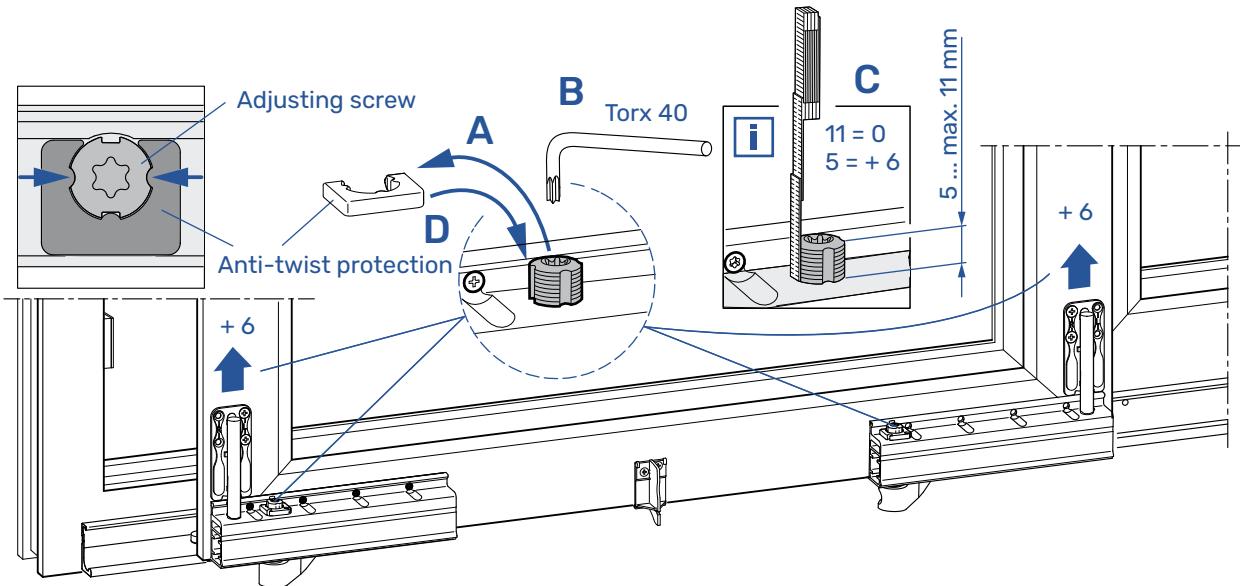

- 1** Check fittings cavity top and bottom on both sides (not shown). If necessary, align the sash as follows.
- 2** Remove anti-twist protections (A).
- 3** Lift bogies (B) by means of adjusting screws in order to align sash. The adjusting screws are allowed to be turned out max. 11 mm (C). Do not overdo it!
- 4** Put anti-twist protections on adjusting screws (D); at first, correct orientation of adjusting screws, if necessary.

FRAME HARDWARE INSTALLATION INSTRUCTIONS


Buffer installation

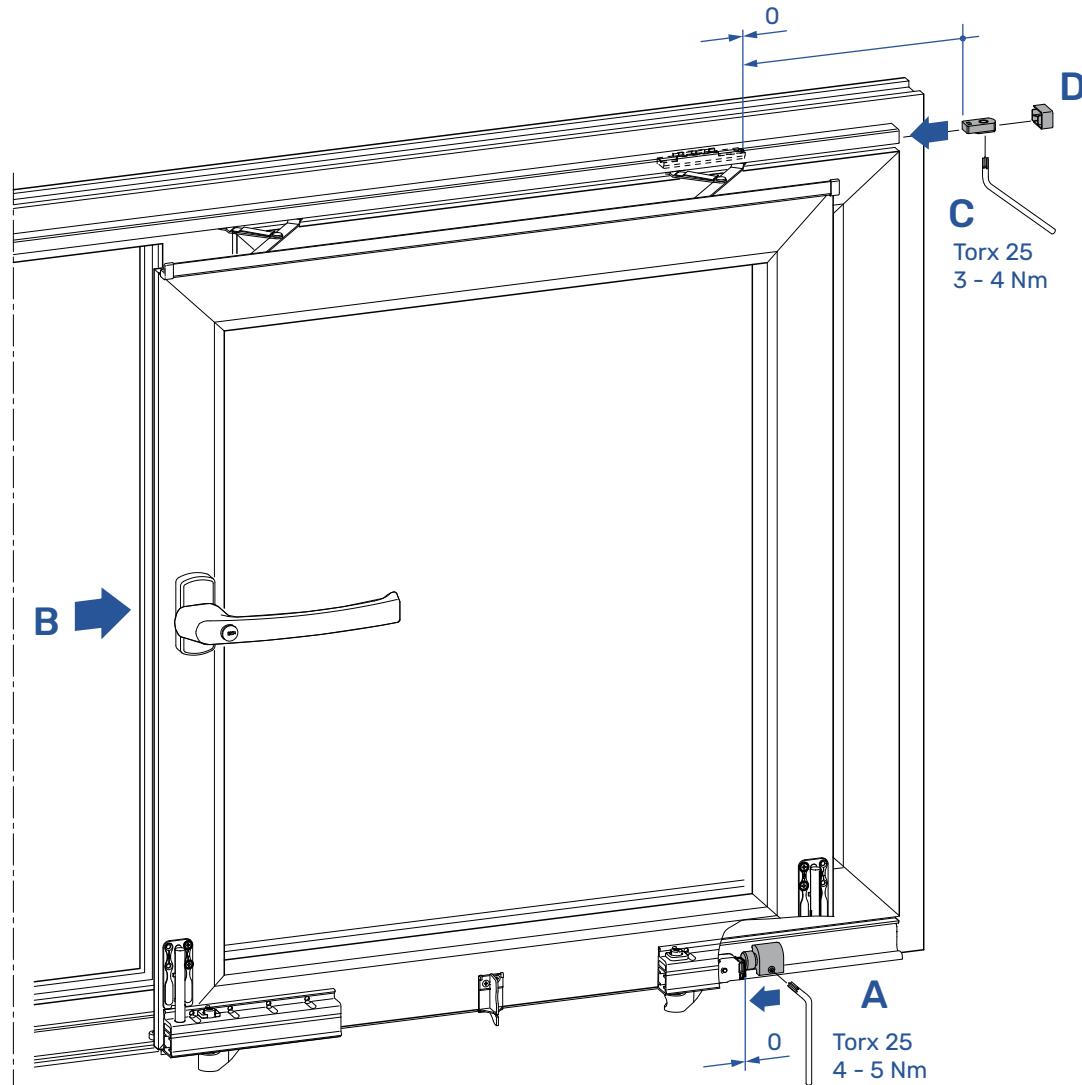

- 1 Screw bottom buffer (A) with attached rubber in required position on bottom track with Torx 25.
- 2 Move the sash (B) right to the buffer.
- 3 Insert top buffer (C) into guide track (until stay system) and tighten it firmly with Torx 25.
- 4 Attach cover caps (D) on ends of the guide track.


FRAME HARDWARE INSTALLATION INSTRUCTIONS

Bogie safety cover and support arm cover installation

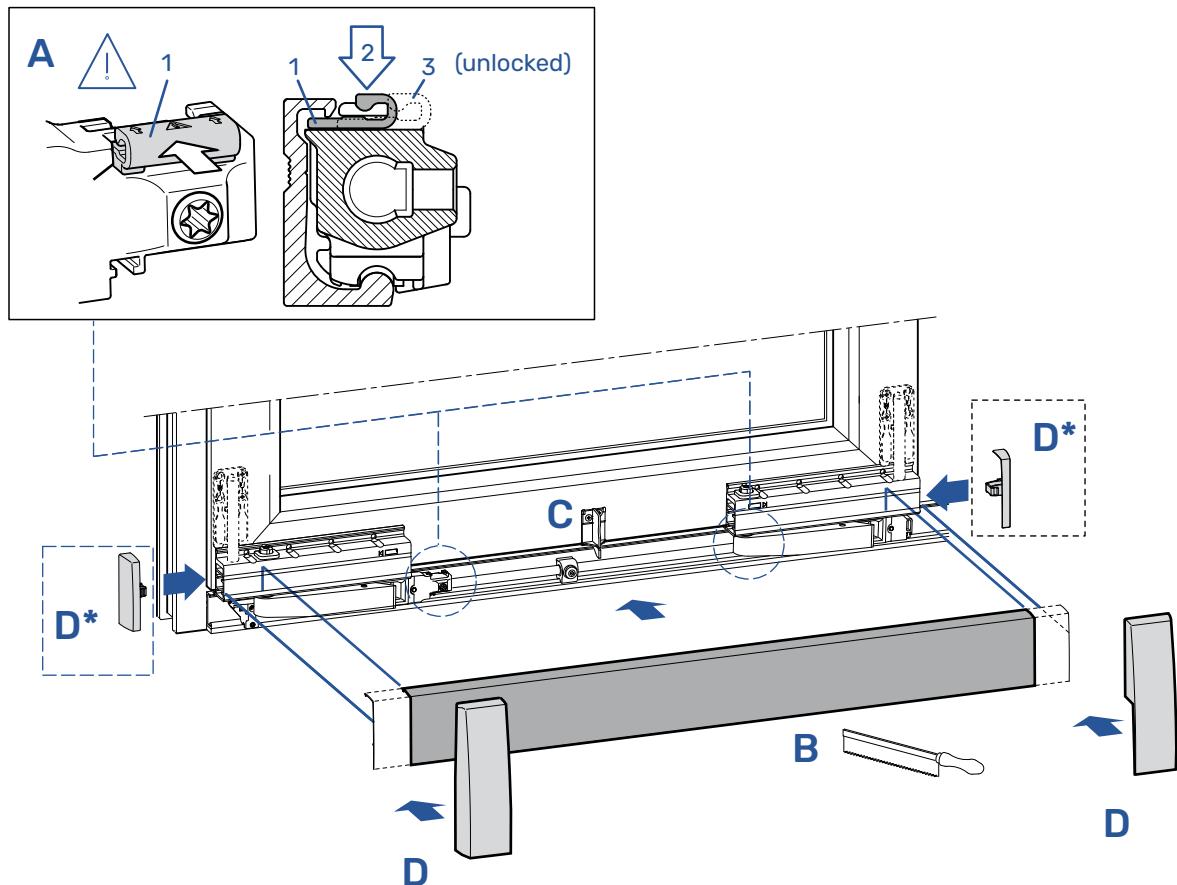

- 1** Move bogie safety device (1) of both bogies backwards until they engage in position as shown (2). Operating sliding window musn't have safety device disengaged (3). (A)
- 2** Cut cover profile (B) to size according to bogie marks.
- 3** Align cover profile (B) according to bogie marks and clip it on the bogies as well as on the cover fillet support(s) (C).
- 4** Clip cover caps (D*) to cover bogies (HKS 100) or clip cover caps (D) to cover bogies with support arms (HKS 160 and SP).

MAINTENANCE INSTRUCTIONS

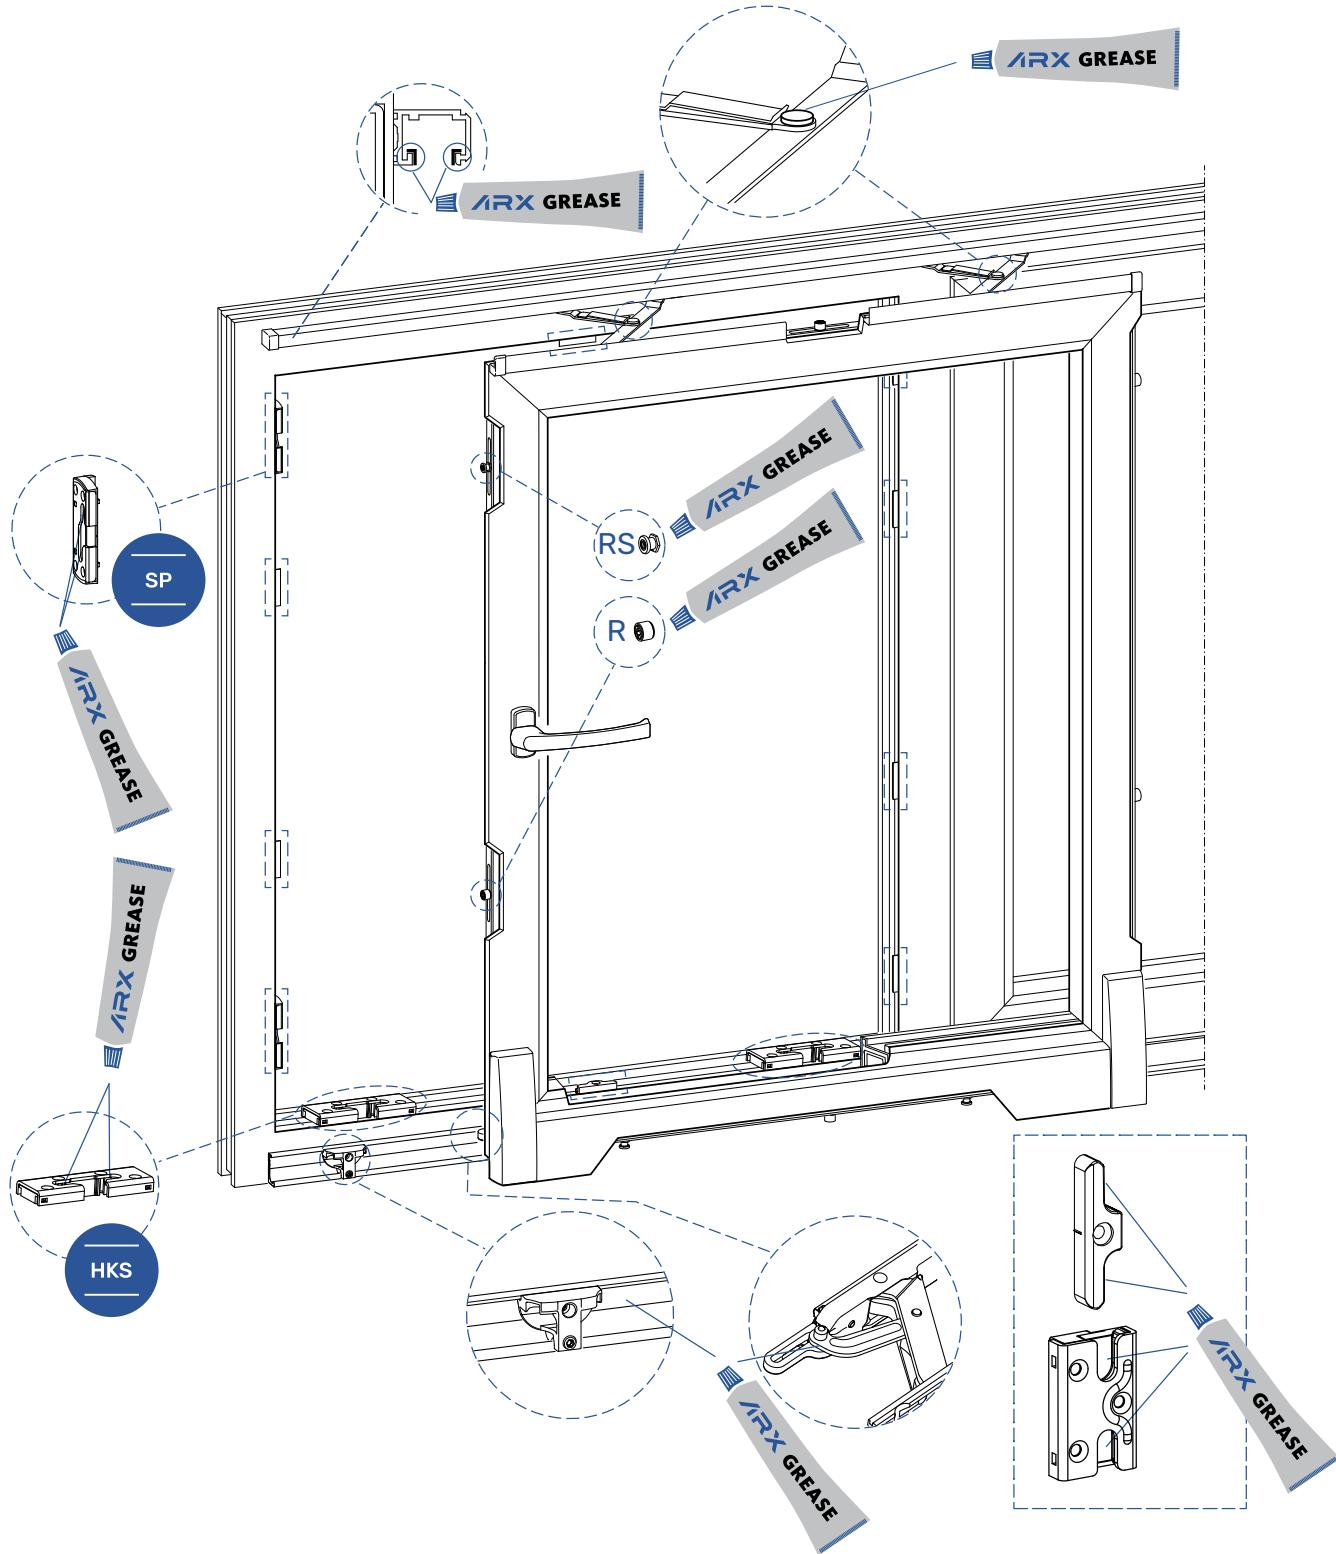

Regular greasing and oiling of operation-relevant components in the sash and frame is recommended at least once a year. In case of frequent use as in schools, hotels the oiling is recommended once in six months.

Acid free and non-resinous grease and/or oil from a specialized dealer must be used.


DESCRIPTION	MATERIAL
ARX - HIGH QUALITY HARDWARE GREASE	1055144



PASS Practical Agile Sliding System


Basic schemes
Proposed guideline
Product portfolio
Detailed information

HIGH-QUALITY, DURABLE, SIMPLE

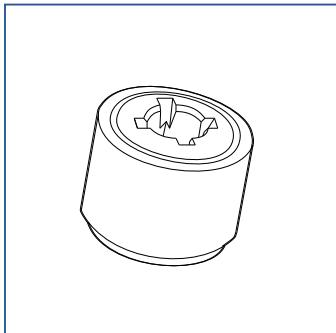


R cam

R cams incorporate a regulatory function which allows installer or user to optimize the window compression by +/- 0,8 mm, thereby improving the sealing properties of windows and balcony doors. Moreover, the R cams provide smoother operation to window users who only need to apply a minimum force in order to operate the handle.

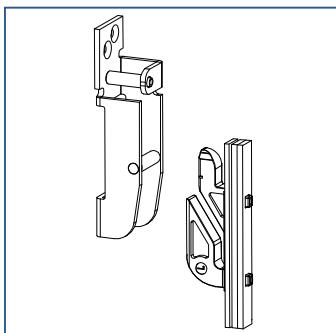


Hooks

Hook's brilliant design for closing and gasket compression improves sealing properties of windows and balcony doors. They also allow the window or door to be in one of 3 stages - open position, ventilation position and closed position.

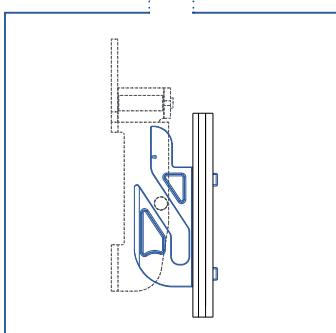

Night ventilation

When the striker pins begin to roll on the hooks, release the handle in a horizontal position. That way the hook won't be full engaged with the striker, but rather half engaged. That way the opening between the sash and the frame will measure 5 mm and it will allow for the air to circulate and ventilate the inside of your home.

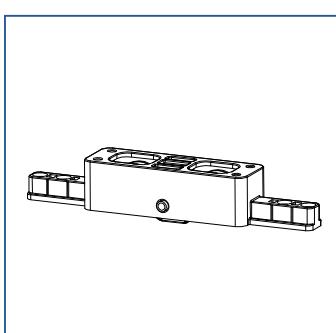


Max. sash weight up to 150 kg

Each window or door contains two PASS bogies, which are made from zamac, which bring additional rigidity and strength to the bogies in comparison with plastic.

SYMBOLS LEGEND

Symbols

In the part describing the Retract & Slide systems, different symbols, diagrams and tables are used in order to provide a clear picture and demonstration of the hardware application. The meanings are as follows:



Retract and slide



Warning



Rebate sash height



Max. sash mass



Rebate sash width



Material number



Handle height



Orientation / position



Night vent



Packaging



Length / dimension




Hardware shortening

Abbreviation	Description	Units
SRH	SASH REBATE HEIGHT	mm
SRW	SASH REBATE WIDTH	mm
HH	HANDLE HEIGHT	mm
BS	BACKSET	mm
M	MAX. SASH MASS	kg
SRH : SRW	MAX. RATIO BETWEEN SRH AND SRW	/


SASH ARRANGEMENT

SCHEME A




DIRECTION OF OPENING

OUTSIDE

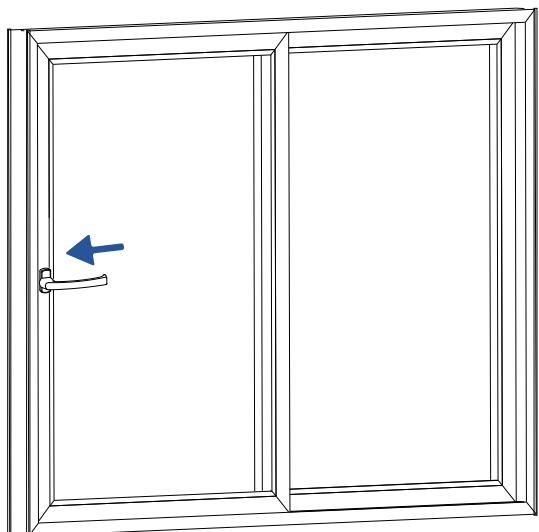

DIN EN 12519 - Right


ARX - Left direction

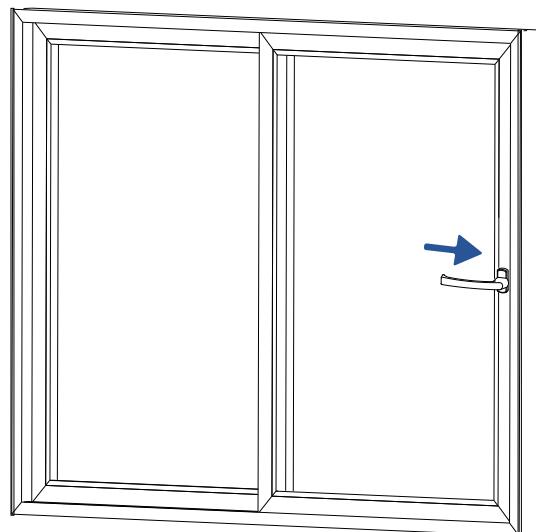


DIN EN 12519 - Left

ARX - Right direction


PASS SYSTEM OPENING

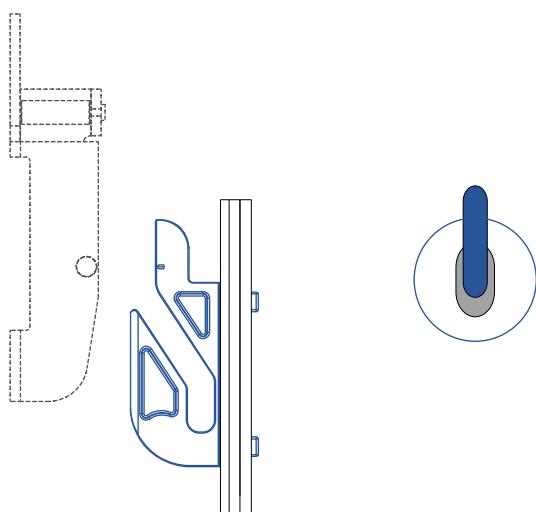

OPEN POSITION

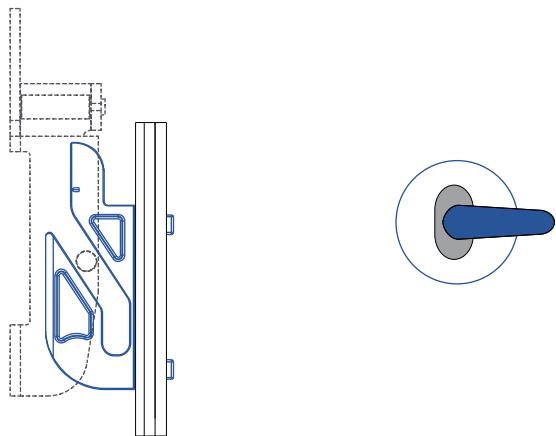


VENTILATION POSITION

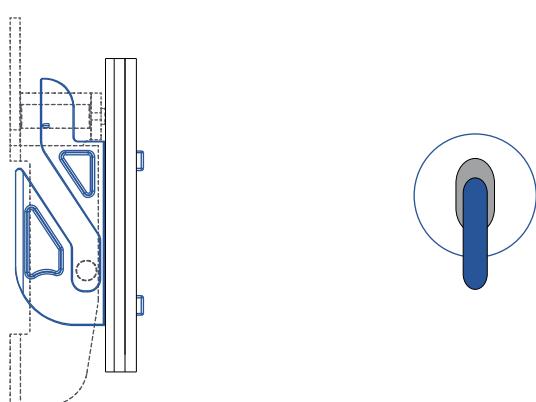


CLOSED POSITION

APPLICATION DIAGRAM

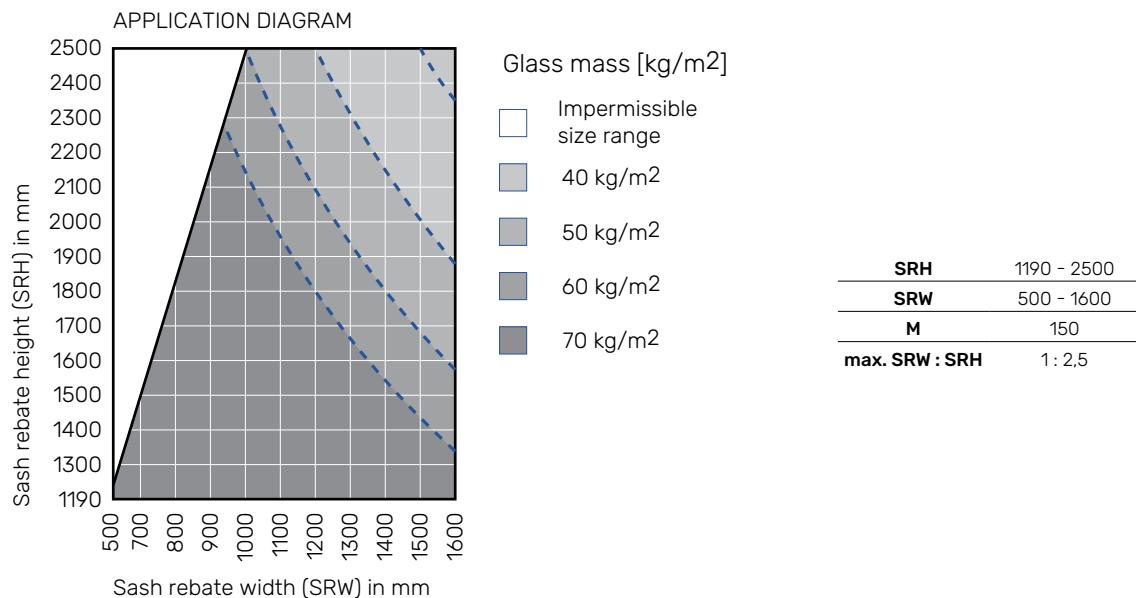

PROFILE RECOMMENDATION

Profile dimensioning - PROFINE Premislide

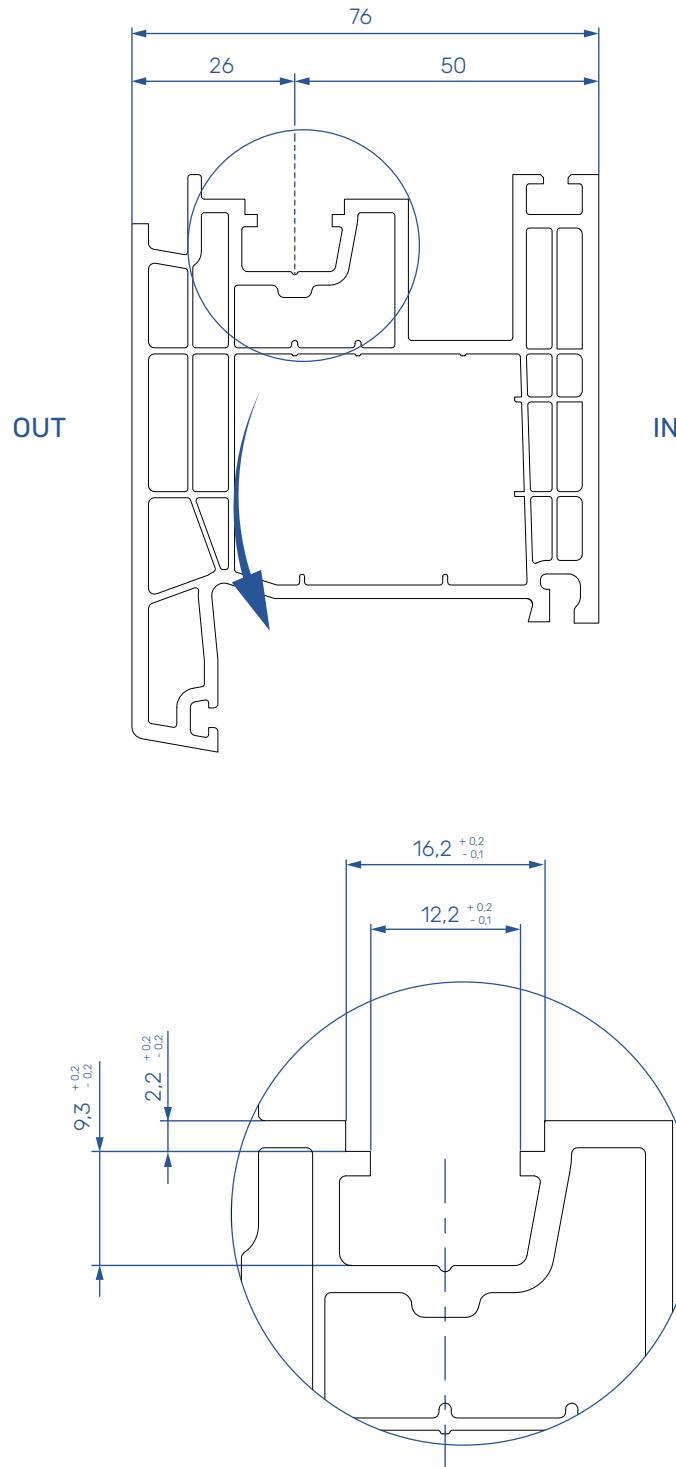

RETRACT & SLIDE - PASS 150 BASIC SCHEME

1 BASIC SET


1143090

2 ESPAGNOLETTE & HOOK STRIKER SET¹⁾

SRH	HH	POS	MATERIAL
1190-1390	500	L	1143080
1190-1390	500	R	1143081
1391-1585	500	L	1143080
1391-1585	500	R	1143081
1586-1800	500	L	1143080
1586-1800	500	R	1143081
1801-2000	500	L	1143080
1801-2000	500	R	1143081
1690-1890	1000	L	1143082
1690-1890	1000	R	1143083
1891-2090	1000	L	1143082
1891-2090	1000	R	1143083
2091-2300	1000	L	1143082
2091-2300	1000	R	1143083
2301-2500	1000	L	1143082
2301-2500	1000	R	1143083
1690-1890 ²⁾	1000	L	1143084
1690-1890 ²⁾	1000	R	1143085
1891-2090 ²⁾	1000	L	1143084
1891-2090 ²⁾	1000	R	1143085
2091-2300 ²⁾	1000	L	1143084
2091-2300 ²⁾	1000	R	1143085
2301-2500 ²⁾	1000	L	1143084
2301-2500 ²⁾	1000	R	1143085

3 ESPAGNOLETTE EXTENSION

SRH	HH	POS	MATERIAL
1190-1390	500	L	1143086
1190-1390	500	R	1143087
1390-1585	500	L	1143088
1390-1585	500	R	1143089
1586-1800	500	L	1143086
1586-1800	500	R	1143087
1801-2000	500	L	1143088
1801-2000	500	R	1143089
1690-1890	1000	L	1143086
1690-1890	1000	R	1143087
1891-2090	1000	L	1143088
1891-2090	1000	R	1143089
2091-2300	1000	L	1143086
2091-2300	1000	R	1143087
2301-2500	1000	L	1143088
2301-2500	1000	R	1143089

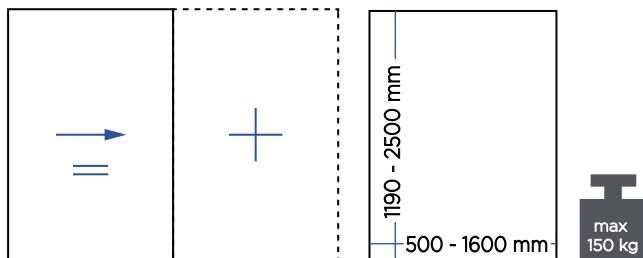


ONLY FOR PROFINE PREMISLIDE PROFILE - BACKSET 40 mm

¹⁾ 1x ESPAGNOLETTE + 2x HOOK STRIKER


²⁾ LOCKABLE VERSION - PROFILE CYLINDER NOT INCLUDED

* MAX. SRW / SRH RATIO = 1 : 2,5

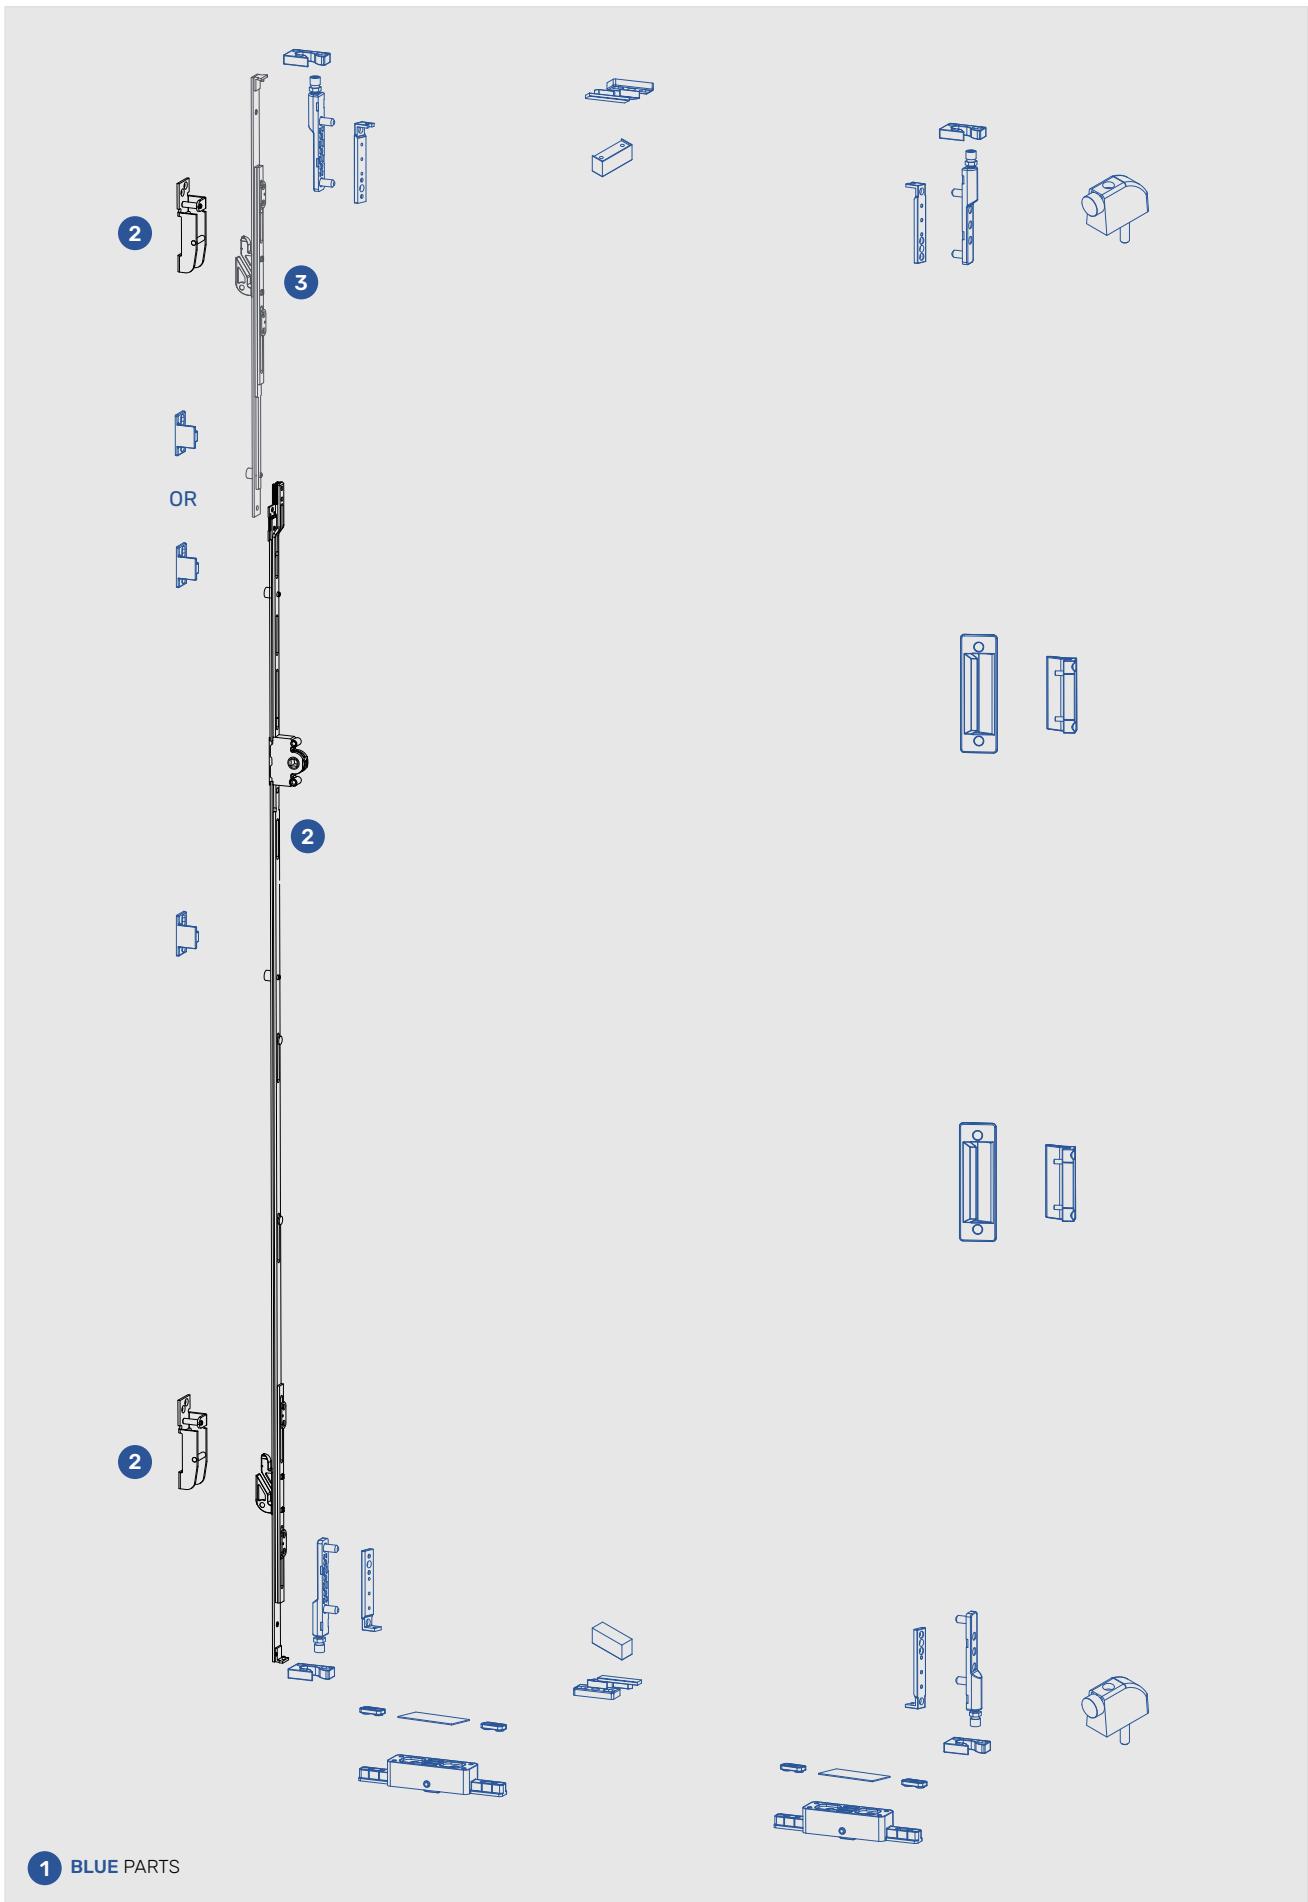

Espagnolettes and extensions

POS	Description	LENGTH	POS	PACK	MATERIAL
1	ESPAÑOLETTE 770 HH500 BS40 + 2x HOOK STRIKER SET	770	L	5	1143080
			R	5	1143081
2	ESPAÑOLETTE 1270 HH1000 BS40 + 2x HOOK STRIKER SET	1270	L	5	1143082
			R	5	1143083
3	ESPAÑOLETTE 1270 HH1000 BS40 WITH LOCK + 2x HOOK STRIKER SET	1270	L	5	1143084
			R	5	1143085
4	ESPAÑOLETTE EXTENSION 1032	1032	L	5	1143086
			R	5	1143087
5	ESPAÑOLETTE EXTENSION 1232	1232	L	5	1143088
			R	5	1143089

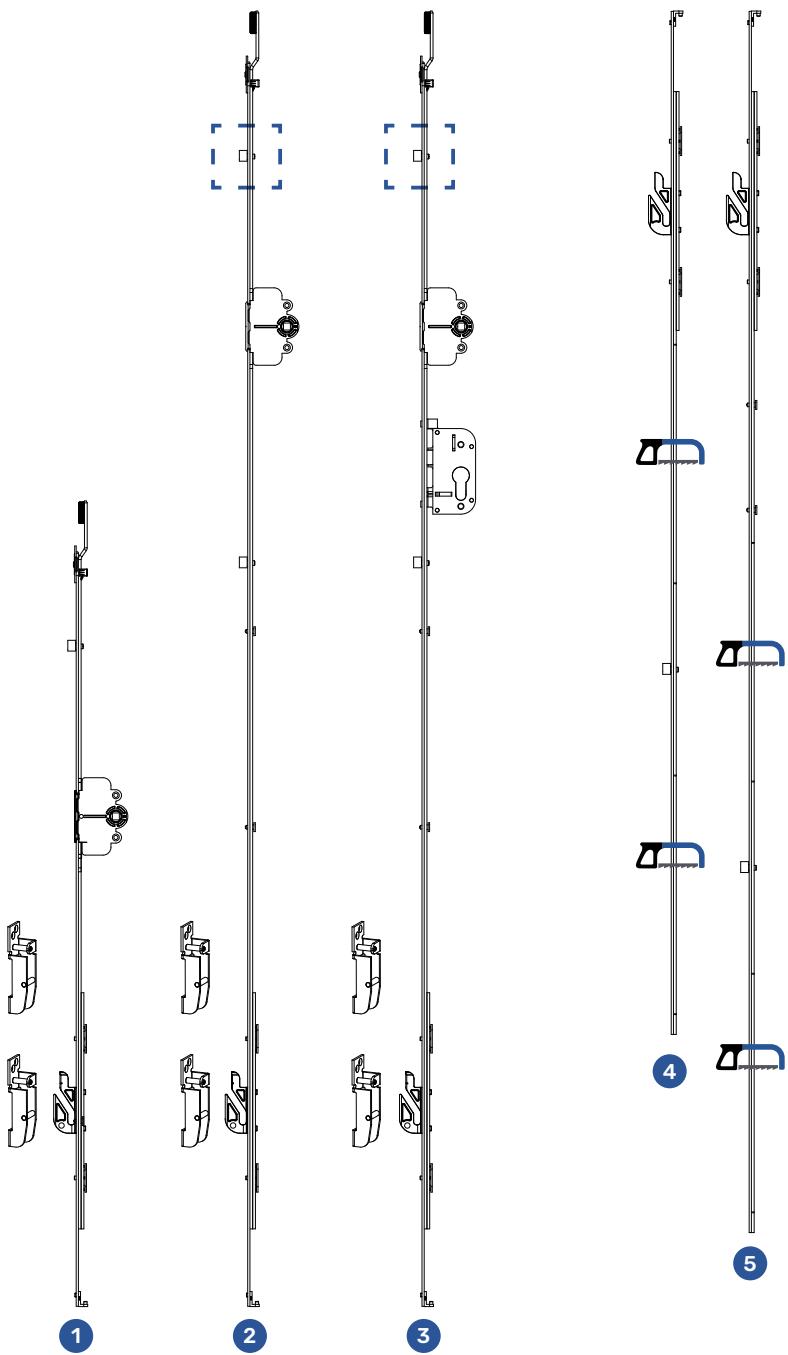


■ USED ONLY WHEN SRH = 1690 - 2090 mm

PRODUCT PORTFOLIO

Basic set

POS*	Description	PACK IN SET	MATERIAL
1	BOGIE PACKERS - PROFINE PREMISLIDE	2	
2	BOGIES 150 KG	2	
3	R CAM STRIKER	2	
4	CORNER GUIDE STRIKER	4	
5	MIDDLE HORIZONTAL STRIKER - FRAME PART	2	
6	MIDDLE HORIZONTAL STRIKER - SASH PART	2	
7	MIDDLE HORIZONTAL STRIKER - SASH PART PACKER	2	
8	SASH GUIDE	4	
9	CORNER SASH GUIDE WITH SCREWS	4	
10	SASH BUFFER WITH SCREW	2	
11	VERTICAL BACK STRIKER - FRAME PART	2	
12	VERTICAL BACK STRIKER - SASH PART	2	
13	VERTICAL BACK STRIKER - SASH PART PACKER	2	

1143090

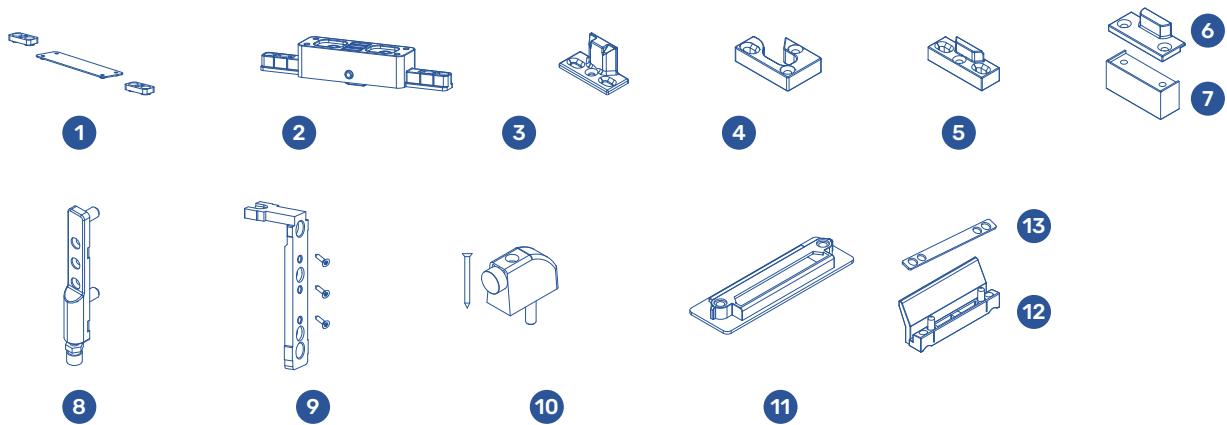


* ALL THE PARTS COMBINED REPRESENT 1 SET

SCREWS FOR FIXING HARDWARE COMPONENTS


TYPE	DESCRIPTION	SIZE	MATERIAL
1	SCREW	4,2 x 25 mm	1134209
2	SCREW	4,2 x 35 mm	1134210



Espagnolette

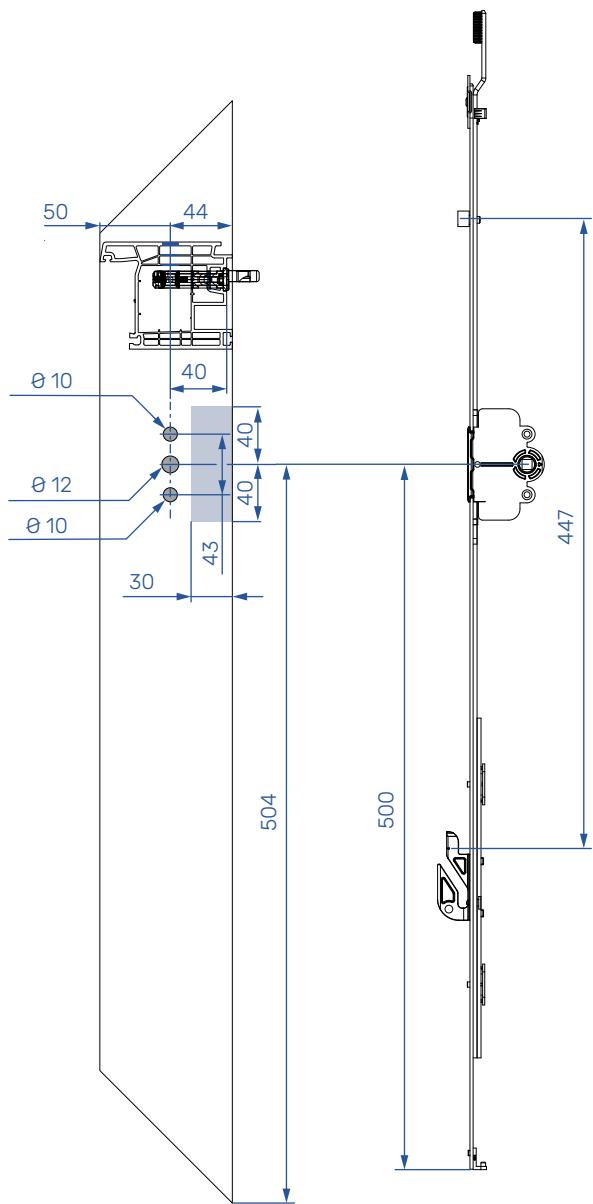


ESPAGNOLETTE 770 HH500 BS40

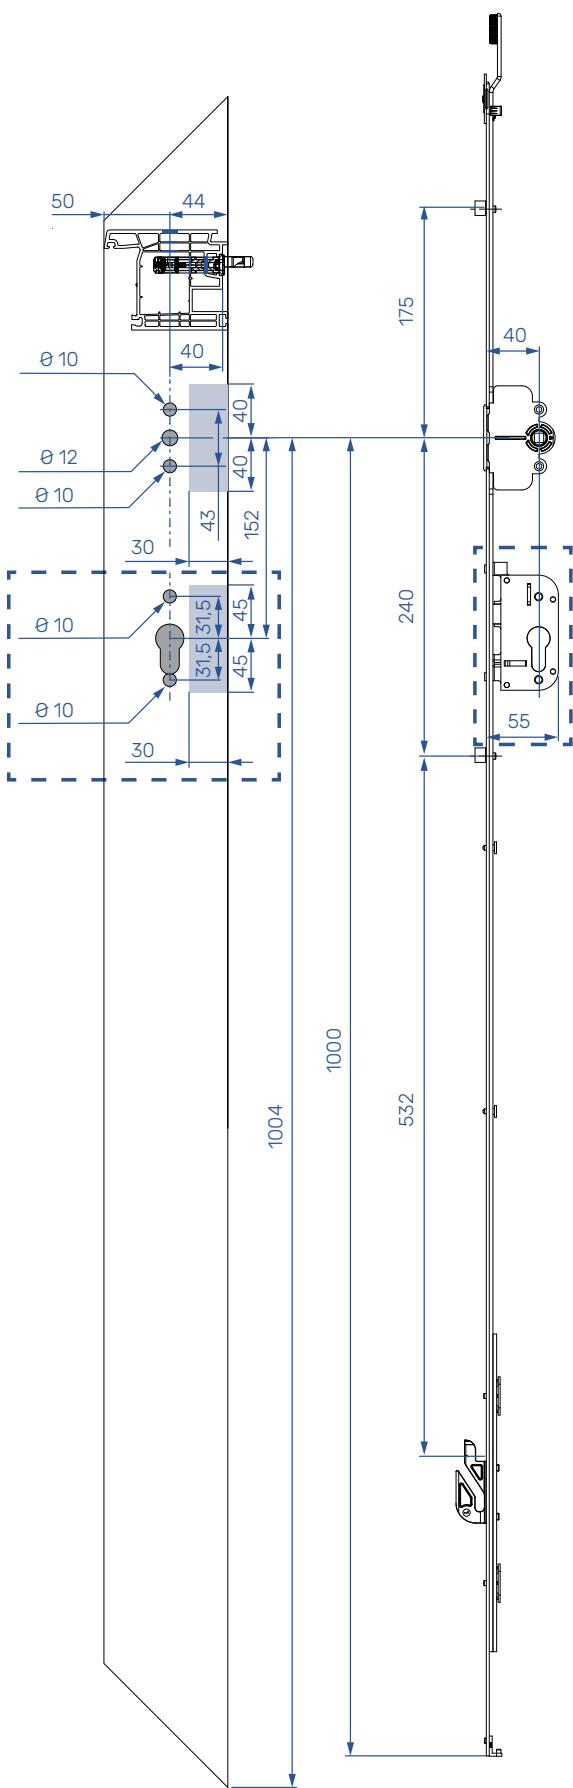


ESPAGNOLETTE 1270 HH1000 BS40

ONLY LOCKABLE VERSION


Vertical back strikers

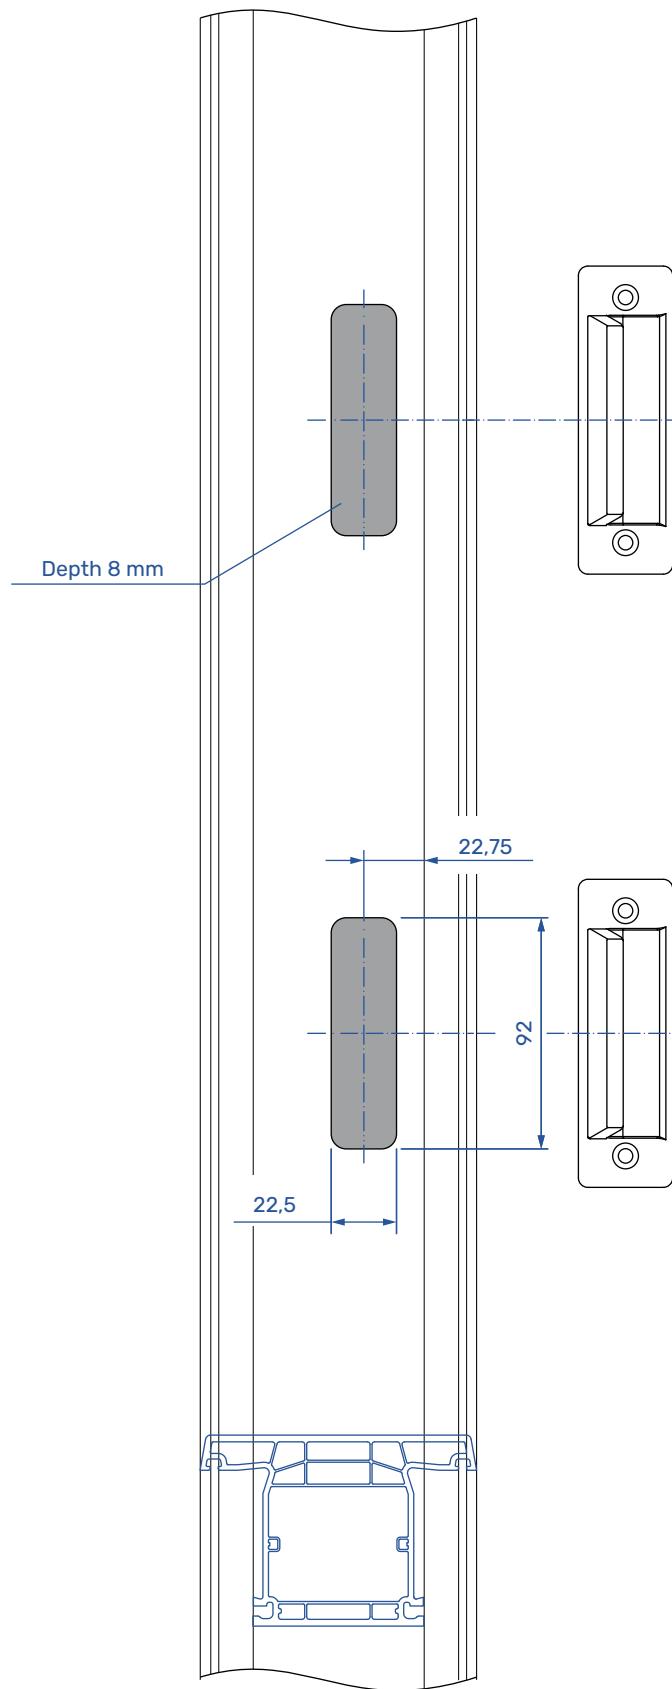



Corner guide strikers

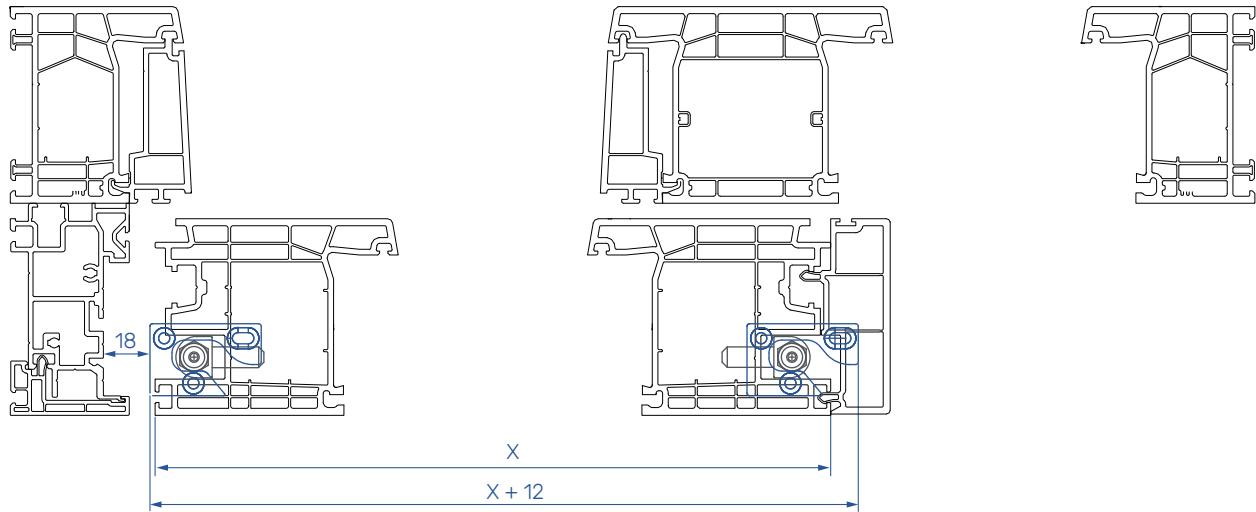


Bogies

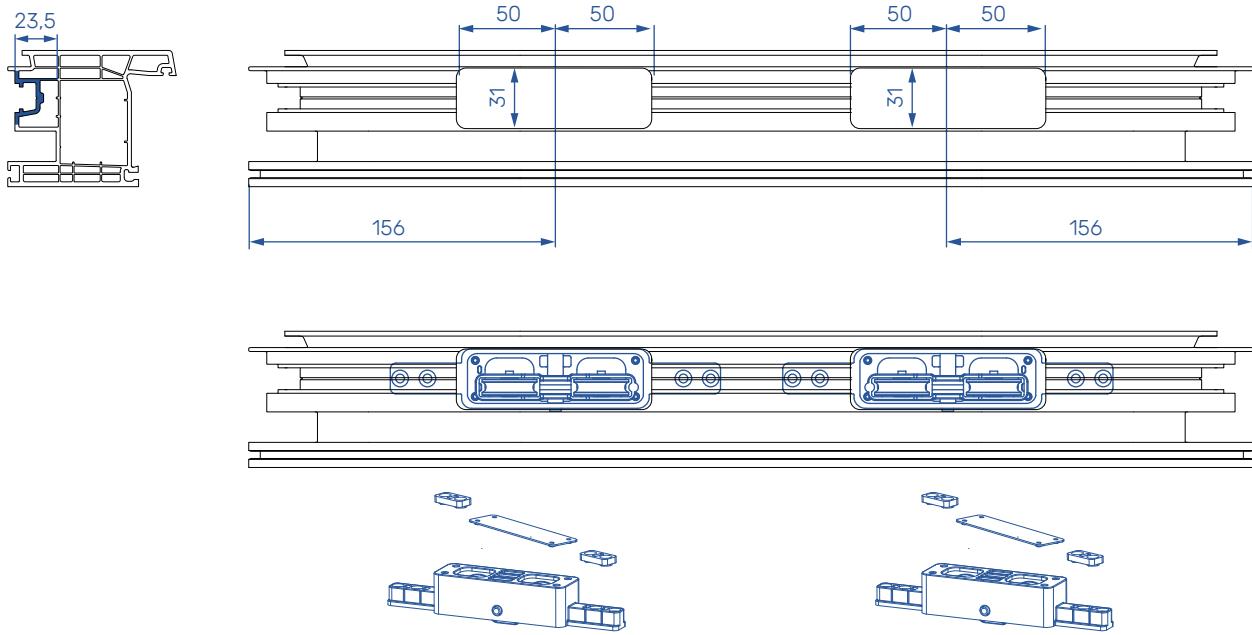



Middle horizontal strikers

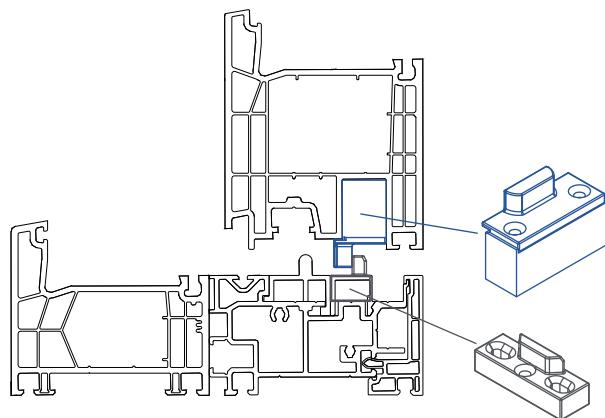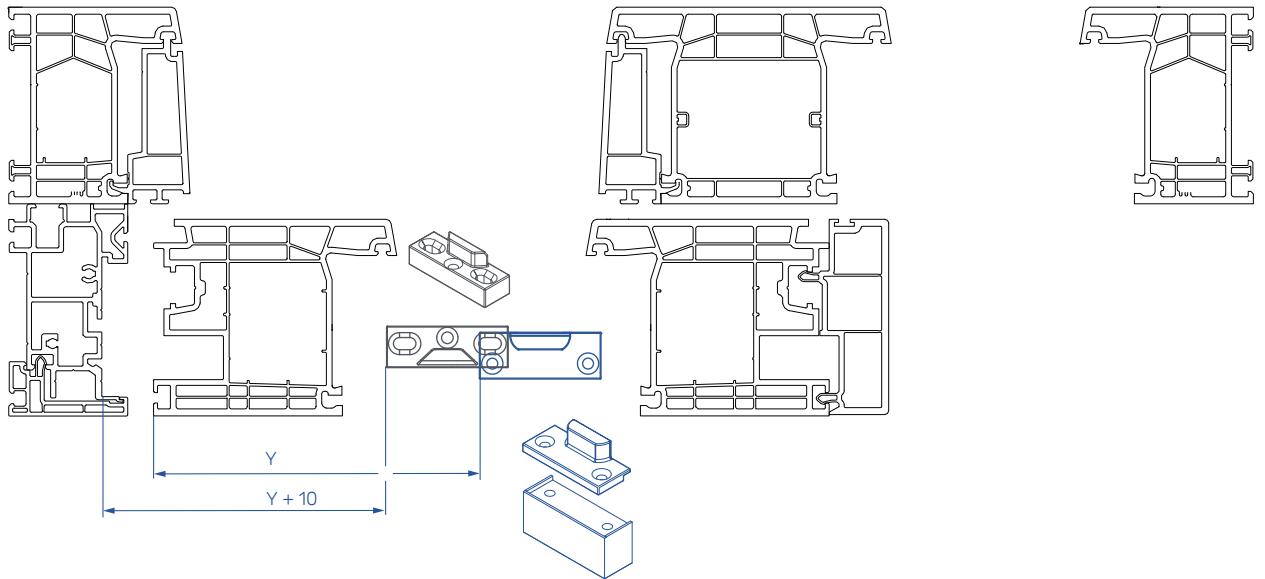


STRIKER POSITIONS.

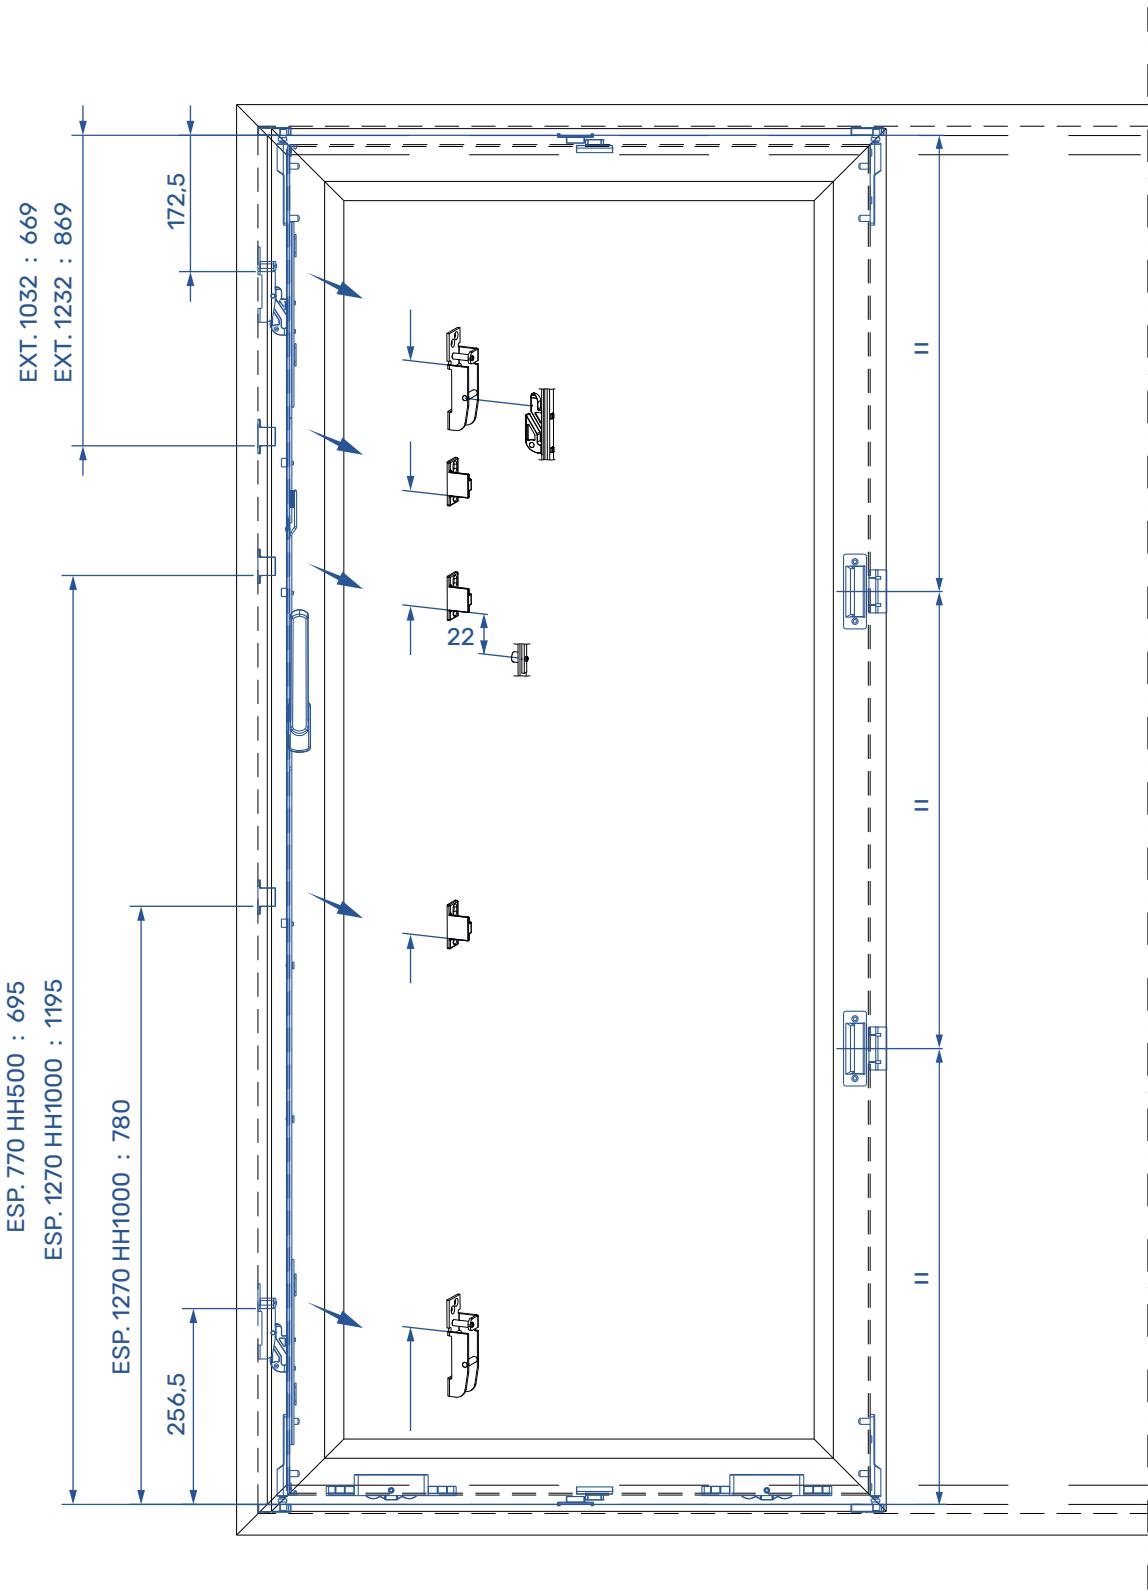


ADJUSTMENT INSTRUCTIONS

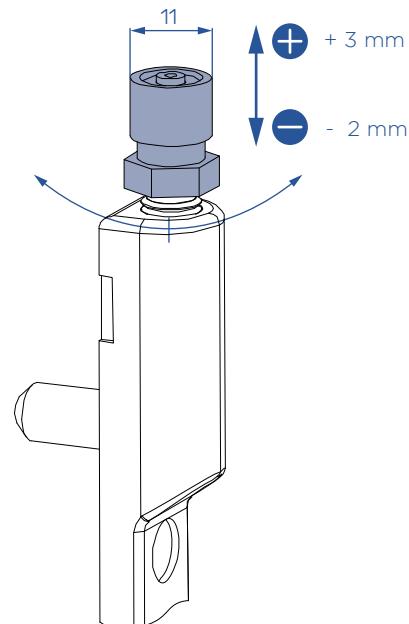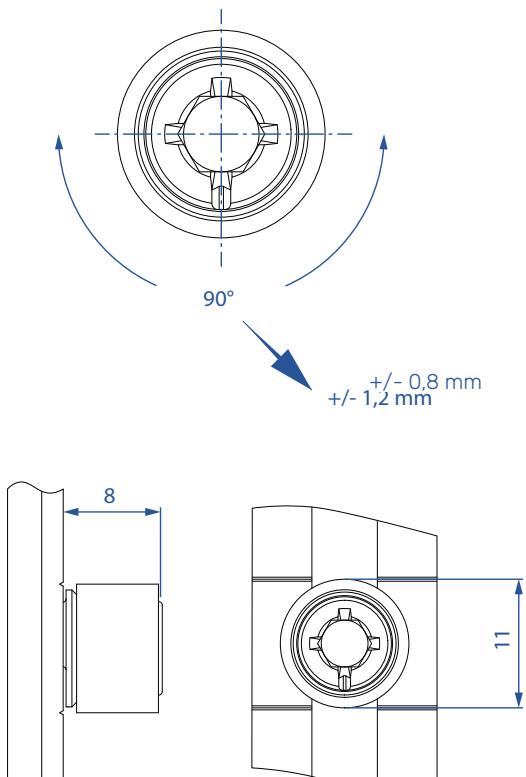

R CAM ADJUSTMENT TOOL




SASH GUIDE PIN ADJUSTMENT TOOL

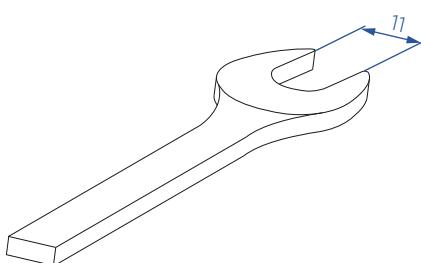

TYPE	DESCRIPTION	SIZE	MATERIAL
1	HEX KEY	4 mm	1095750
2	WRENCH KEY	11 mm	/



MAINTENANCE INSTRUCTIONS

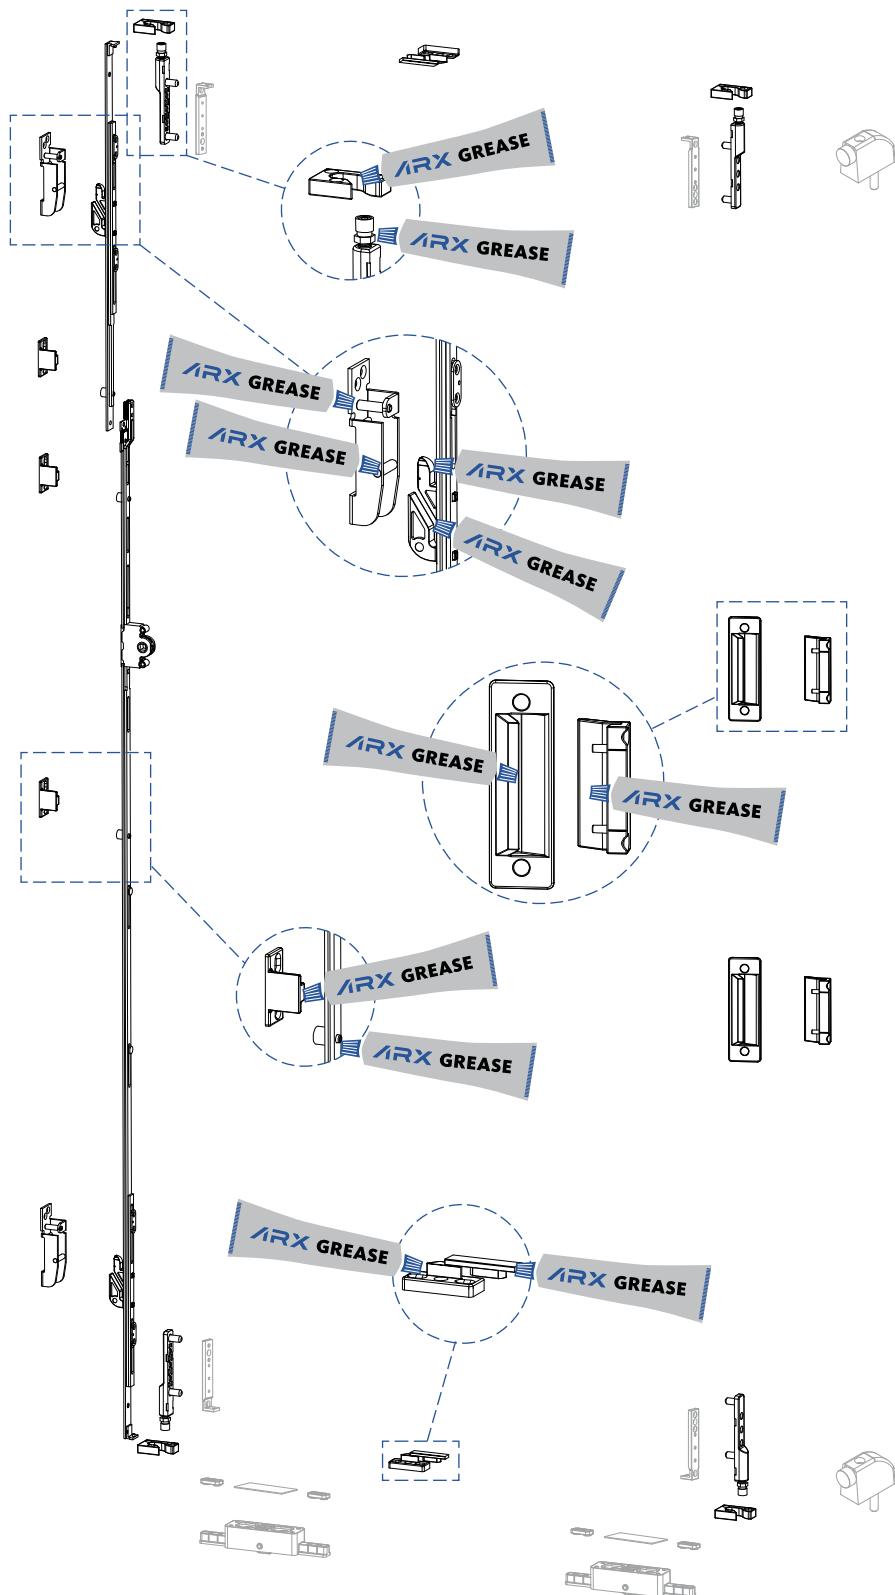

Regular greasing and oiling of operation-relevant components in the sash and frame is recommended at least once a year. In case of frequent use as in schools, hotels the oiling is recommended once in six months.

Acid free and non-resinous grease and/or oil from a specialized dealer must be used.



DESCRIPTION	MATERIAL
ARX - HIGH QUALITY HARDWARE GREASE	1055144



ARX building hardware

- INSTALLATION INSTRUCTIONS,
 - INSTRUCTIONS FOR USE,
 - PRODUCT PORTFOLIO PRESENTATION,
 - NOVELTIES.

www.arx-hardware.com

 info@arx-hardware.com

 + 386 (0)1 70 95 100



Kovinoplastika Lož d.o.o.
Cesta 19. oktobra 57, Lož
1386 Stari trg pri Ložu
Slovenia

Follow us:

